

NFPA[®]

1986

Standard on
Respiratory Protection
Equipment for Tactical and
Technical Operations

2023



IMPORTANT NOTICES AND DISCLAIMERS CONCERNING NFPA® STANDARDS

NFPA® codes, standards, recommended practices, and guides (“NFPA Standards”), of which the document contained herein is one, are developed through a consensus standards development process approved by the American National Standards Institute. This process brings together volunteers representing varied viewpoints and interests to achieve consensus on fire and other safety issues. While the NFPA administers the process and establishes rules to promote fairness in the development of consensus, it does not independently test, evaluate, or verify the accuracy of any information or the soundness of any judgments contained in NFPA Standards.

The NFPA disclaims liability for any personal injury, property, or other damages of any nature whatsoever, whether special, indirect, consequential or compensatory, directly or indirectly resulting from the publication, use of, or reliance on NFPA Standards. The NFPA also makes no guaranty or warranty as to the accuracy or completeness of any information published herein.

In issuing and making NFPA Standards available, the NFPA is not undertaking to render professional or other services for or on behalf of any person or entity. Nor is the NFPA undertaking to perform any duty owed by any person or entity to someone else. Anyone using this document should rely on his or her own independent judgment or, as appropriate, seek the advice of a competent professional in determining the exercise of reasonable care in any given circumstances.

The NFPA has no power, nor does it undertake, to police or enforce compliance with the contents of NFPA Standards. Nor does the NFPA list, certify test, or inspect products, designs, or installations for compliance with this document. Any certification or other statement of compliance with the requirements of this document shall not be attributable to the NFPA and is solely the responsibility of the certifier or maker of the statement.



REMINDER: UPDATING OF NFPA STANDARDS

Users of NFPA codes, standards, recommended practices, and guides (“NFPA Standards”) should be aware that these documents may be superseded at any time by the issuance of a new edition, may be amended with the issuance of Tentative Interim Amendments (TIAs), or be corrected by Errata. It is intended that through regular revisions and amendments, participants in the NFPA standards development process consider the then-current and available information on incidents, materials, technologies, innovations, and methods as these develop over time and that NFPA Standards reflect this consideration. Therefore, any previous edition of this document no longer represents the current NFPA Standard on the subject matter addressed. NFPA encourages the use of the most current edition of any NFPA Standard [as it may be amended by TIA(s) or Errata] to take advantage of current experience and understanding. An official NFPA Standard at any point in time consists of the current edition of the document, including any issued TIAs and Errata then in effect.

To determine whether an NFPA Standard has been amended through the issuance of TIAs or corrected by Errata, visit the “Codes & Standards” section at www.nfpa.org.

ADDITIONAL IMPORTANT NOTICES AND DISCLAIMERS CONCERNING NFPA® STANDARDS

Updating of NFPA Standards

Users of NFPA codes, standards, recommended practices, and guides (“NFPA Standards”) should be aware that these documents may be superseded at any time by the issuance of a new edition, may be amended with the issuance of Tentative Interim Amendments (TIAs), or be corrected by Errata. It is intended that through regular revisions and amendments, participants in the NFPA standards development process consider the then-current and available information on incidents, materials, technologies, innovations, and methods as these develop over time and that NFPA Standards reflect this consideration. Therefore, any previous edition of this document no longer represents the current NFPA Standard on the subject matter addressed. NFPA encourages the use of the most current edition of any NFPA Standard [as it may be amended by TIA(s) or Errata] to take advantage of current experience and understanding. An official NFPA Standard at any point in time consists of the current edition of the document, including any issued TIAs and Errata then in effect.

To determine whether an NFPA Standard has been amended through the issuance of TIAs or corrected by Errata, visit the “Codes & Standards” section at www.nfpa.org.

Interpretations of NFPA Standards

A statement, written or oral, that is not processed in accordance with Section 6 of the Regulations Governing the Development of NFPA Standards shall not be considered the official position of NFPA or any of its Committees and shall not be considered to be, nor be relied upon as, a Formal Interpretation.

Patents

The NFPA does not take any position with respect to the validity of any patent rights referenced in, related to, or asserted in connection with an NFPA Standard. The users of NFPA Standards bear the sole responsibility for determining the validity of any such patent rights, as well as the risk of infringement of such rights, and the NFPA disclaims liability for the infringement of any patent resulting from the use of or reliance on NFPA Standards.

NFPA adheres to the policy of the American National Standards Institute (ANSI) regarding the inclusion of patents in American National Standards (“the ANSI Patent Policy”), and hereby gives the following notice pursuant to that policy:

NOTICE: The user’s attention is called to the possibility that compliance with an NFPA Standard may require use of an invention covered by patent rights. NFPA takes no position as to the validity of any such patent rights or as to whether such patent rights constitute or include essential patent claims under the ANSI Patent Policy. If, in connection with the ANSI Patent Policy, a patent holder has filed a statement of willingness to grant licenses under these rights on reasonable and nondiscriminatory terms and conditions to applicants desiring to obtain such a license, copies of such filed statements can be obtained, on request, from NFPA. For further information, contact the NFPA at the address listed below.

Law and Regulations

Users of NFPA Standards should consult applicable federal, state, and local laws and regulations. NFPA does not, by the publication of its codes, standards, recommended practices, and guides, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

NFPA Standards are copyrighted. They are made available for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of safe practices and methods. By making these documents available for use and adoption by public authorities and private users, the NFPA does not waive any rights in copyright to these documents.

Use of NFPA Standards for regulatory purposes should be accomplished through adoption by reference. The term “adoption by reference” means the citing of title, edition, and publishing information only. Any deletions, additions, and changes desired by the adopting authority should be noted separately in the adopting instrument. In order to assist NFPA in following the uses made of its documents, adopting authorities are requested to notify the NFPA (Attention: Secretary, Standards Council) in writing of such use. For technical assistance and questions concerning adoption of NFPA Standards, contact NFPA at the address below.

For Further Information

All questions or other communications relating to NFPA Standards and all requests for information on NFPA procedures governing its codes and standards development process, including information on the procedures for requesting Formal Interpretations, for proposing Tentative Interim Amendments, and for proposing revisions to NFPA standards during regular revision cycles, should be sent to NFPA headquarters, addressed to the attention of the Secretary, Standards Council, NFPA, 1 Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101; email: stds_admin@nfpa.org.

For more information about NFPA, visit the NFPA website at www.nfpa.org. All NFPA codes and standards can be viewed at no cost at www.nfpa.org/docinfo.

Copyright © 2022 National Fire Protection Association®. All Rights Reserved.

NFPA® 1986

Standard on

Respiratory Protection Equipment for Tactical and Technical Operations

2023 Edition

This edition of NFPA 1986, *Standard on Respiratory Protection Equipment for Tactical and Technical Operations*, was prepared by the Technical Committee on Tactical and Technical Operations Respiratory Protection Equipment and released by the Correlating Committee on Fire and Emergency Services Protective Clothing and Equipment. It was issued by the Standards Council on April 4, 2022, with an effective date of April 24, 2022, and supersedes all previous editions.

This edition of NFPA 1986 was approved as an American National Standard on April 24, 2022.

Origin and Development of NFPA 1986

In September 2012, the Standards Council responded to a new project request submitted by Daniel Rossos, Chair of the Technical Committee on Respiratory Protection Equipment. The request related to the use of respiratory protection equipment for emergency operations that did not involve structural firefighting. After its review, the Standards Council determined that there is a well-established technical need and a demonstrated demand for a standard addressing design, use, testing, and certification of self-contained breathing apparatus (SCBA) not covered by the requirements of NFPA 1981, *Standard on Open-Circuit Self-Contained Breathing Apparatus (SCBA) for Emergency Services*.

The Standards Council also established a new Technical Committee on Tactical and Technical Operations Respiratory Protection Equipment and invited individuals to apply for membership, particularly from law enforcement, federal agencies, defense organizations, hazardous material incident responders, and related agencies to establish a balanced technical committee representing the needs and requirements of the end user community.

The 2017 edition of the standard specified the minimum requirements for the design (Chapter 6), performance (Chapter 7), testing (Chapter 8), and certification (Chapter 4) of new compressed breathing open-circuit SCBA and supplied air respirators (SAR) and for replacement parts, components, and accessories for non-structural firefighting devices.

For the 2023 edition, the cold temperature exposure conditions language has been revised for consistency with NFPA 1987. There have been updates and clarifications to various test methods, including chemical challenges. In addition, the definitions of *breathing air cylinder* and *cylinder* have been replaced with *breathing air pressure vessel* throughout the standard.

Correlating Committee on Fire and Emergency Services Protective Clothing and Equipment

Rick L. Swan, Chair

IAFF Local 2881/CDF Fire Fighters, VA [L]

Rep. International Association of Fire Fighters

Jason L. Allen, Intertek Testing Services, NY [RT]

James B. Area, Chimera Enterprises International, MD [SE]

Joseph Arrington, San Antonio Fire Department, TX [U]

Roger L. Barker, North Carolina State University, NC [SE]

Cristine Z. Fargo, International Safety Equipment Association, VA [M]

Edmund Farley, Pittsburgh Bureau Of Fire, PA [E]

Diane B. Hess, PBI Performance Products, Inc., NC [M]

Thomas M. Hosea, US Department of the Navy, FL [RT]

Ronald Johnston, Superior Products, OH [M]

Rep. Compressed Gas Association

Beth C. Lancaster, US Department of Defense, VA [E]

Jeff Legendre, Northborough Fire Department, MA [U]

Karen E. Lehtonen, LION Group, Inc., OH [M]

David G. Matthews, Fire & Industrial (PPE) Ltd., United Kingdom [SE]

Rep. International Standards Organization

Benjamin Mauti, Globe Manufacturing/Mine Safety Appliances Company, PA [M]

Michael F. McKenna, Michael McKenna & Associates, LLC, CA [SE]

Douglas Menard, Boston Fire Department, MA [U]

John H. Morris, 3M Company, GA [M]

Amanda H. Newsom, UL LLC, NC [RT]

Stephen R. Sanders, ASTM/Safety Equipment Institute (SEI), VA [RT]

Jeffrey O. Stull, International Personnel Protection, Inc., TX [M]

Jonathan V. Szalajda, National Institute for Occupational Safety & Health, PA [E]

Robert D. Tutterow, Jr., Fire Industry Education Resource Organization (FIERO), NC [U]

Rep. NFPA Fire Service Section

William A. Van Lent, Veridian Ltd., Inc., IA [M]

Rep. Fire & Emergency Manufacturers & Services Association

Bruce H. Varner, BHVarner & Associates, AZ [M]

Rep. International Fire Service Training Association

Dick Weise, Los Angeles County Fire Department/Safer, CA [U]

Harry P. Winer, HIP Consulting LLC, MA [SE]

Alternates

David T. Bernzweig, Columbus (OH) Division of Fire, OH [L]
(Alt. to Rick L. Swan)

Louis Carpentier, Innotex Inc., Canada [M]
(Alt. to William A. Van Lent)

Robin B. Childs, US Department of Defense, VA [E]
(Alt. to Beth C. Lancaster)

Daniel Glucksman, International Safety Equipment, VA [M]
(Alt. to Cristine Z. Fargo)

Kenneth Hayes, Boston Fire Department, MA [U]
(Alt. to Douglas Menard)

Judge W. Morgan, 3M Scott Safety, NC [M]
(Alt. to John H. Morris)

Gary L. Neilson, Sparks, NV [U]
(Alt. to Robert D. Tutterow, Jr.)

Jeffrey Peterson, National Institute for Occupational Safety & Health (NIOSH), PA [E]
(Alt. to Jonathan V. Szalajda)

Kevin M. Roche, Facets Consulting, AZ [M]
(Alt. to Bruce H. Varner)

Russell Shephard, Australasian Fire & Emergency Service Authorities Council, Australia [SE]
(Alt. to David G. Matthews)

David P. Stoddard, Michael McKenna & Associates, LLC, CA [SE]
(Alt. to Michael F. McKenna)

Grace G. Stull, International Personnel Protection, Inc., TX [M]
(Alt. to Jeffrey O. Stull)

Jian Xiang, The DuPont Company, Inc., VA [M]
(Alt. to Diane B. Hess)

Nonvoting

Robert J. Athanas, SAFE-IR, Incorporated, NY [SE]
Rep. TC on Electronic Safety Equipment

Christina M. Baxter, Emergency Response Tips, LLC, FL [U]
Rep. TC on Hazardous Materials PC&E

Tricia L. Hock, ASTM/Safety Equipment Institute (SEI), VA [RT]
Rep. TC on Emergency Medical Services PC&E

Jeremy Metz, West Metro Fire Rescue, CO [U]
Rep. TC on Special Operations PC&E

Stephen T. Miles, National Institute for Occupational Safety & Health, WV [E]
Rep. TC on Respiratory Protection Equipment

Chris Farrell, NFPA Staff Liaison

Brian Montgomery, US Department of Justice, DC [E]

Rep. Tactical and Technical Operations Respiratory Protection Equipment

Jay L. Tarley, National Institute for Occupational Safety & Health, WV [E]
Rep. TC on Wildland Fire Fighting PC&E

Tim W. Tomlinson, Addison Fire Department, TX [C]
Rep. TC on Structural and Proximity Fire Fighting PC&E

This list represents the membership at the time the Committee was balloted on the final text of this edition. Since that time, changes in the membership may have occurred. A key to classifications is found at the back of the document.

NOTE: Membership on a committee shall not in and of itself constitute an endorsement of the Association or any document developed by the committee on which the member serves.

Committee Scope: This Committee shall have primary responsibility for documents on the design, performance, testing, and certification of protective clothing and protective equipment manufactured for fire and emergency services organizations and personnel, to protect against exposures encountered during emergency incident operations. This Committee shall also have the primary responsibility for documents on the selection, care, and maintenance of such protective clothing and protective equipment by fire and emergency services organizations and personnel.



Technical Committee on Tactical and Technical Operations Respiratory Protection Equipment

Brian Montgomery, Chair
US Department of Justice, DC [E]

Craig Adams, Los Angeles Police Department, CA [U]
Rep. The InterAgency Board
Edward Anderson, Boston Fire Department, MA [U]
Daniel J. Barker, US Department of Defense, MD [RT]
Christina M. Baxter, Emergency Response Tips, LLC, FL [SE]
Gary Beals, US Marine Corps, VA [U]
Brian J. Clifford, US Federal Bureau of Investigation, VA [U]
Caoimhin P. Connell, Park County Sheriff's Office, CO [SE]
Rep. The InterAgency Board
Robin R. Gainey, Jacksonville Fire Rescue Department, FL [L]
Rep. International Association of Fire Fighters
Beth C. Lancaster, US Department of Defense, VA [E]
Ken Lawson, SPO Inc., VA [M]
Clint Mayhue, Avon Protection Systems, GA [M]

Judge W. Morgan, 3M Scott Safety, NC [M]
Amanda H. Newson, UL LLC, NC [RT]
Ed Roncone, Libertyville Police Department, IL [C]
Rep. Illinois Law Enforcement Alarm System
Stephen R. Sanders, ASTM/Safety Equipment Institute (SEI), VA [RT]
Robert Sell, Draeger, Inc., PA [M]
Randy Sterett, Orange County Sheriff's Department, CA [U]
Rep. National Bomb Squad Commanders Advisory Board
Jonathan V. Szalajda, National Institute for Occupational Safety & Health, PA [E]
Rep. National Institute for Occupational Safety & Health
Marco Tekelenburg, Mine Safety Appliance Company, PA [M]
Tim West, Wilcox Industries, MT [M]

Alternates

Jason L. Allen, Intertek Testing Services, NY [RT]
(Voting Alt.)
Adam Bilger, Mine Safety Appliance Company (MSA), PA [M]
(Alt. to Marco Tekelenburg)
D. Mark Bledsoe, US Federal Bureau of Investigation, VA [U]
(Alt. to Brian J. Clifford)
Robin B. Childs, US Department of Defense, VA [E]
(Alt. to Beth C. Lancaster)
Mark Ciampaglio, US Army- Edgewood Chemical Biological Center (ECBC), MD [RT]
(Alt. to Daniel J. Barker)
Denice Young Durrant, UL LLC, NC [RT]
(Alt. to Amanda H. Newson)
David Hodson, DAH Consultant, United Kingdom [M]
(Alt. to Robert Sell)

John H. Morris, 3M Company, GA [M]
(Alt. to Judge W. Morgan)
Gregory W. Sachman, Seattle Police Department, WA [U]
(Alt. to Craig Adams)
Jarrett Seal, National Bomb Squad Commanders Advisory Board (NBSCAB), FL [U]
(Alt. to Randy Sterett)
Robert R. Stein, National Institute for Occupational Safety & Health, (NIOSH), PA [E]
(Alt. to Jonathan V. Szalajda)
Erin W. Valliere, Marine Corps Systems Command, VA [U]
(Alt. to Gary Beals)
Stephanie Marie Wilson, Naval Surface Warfare Center, FL [SE]
(Voting Alt.)

Nonvoting

Lana A. Nieves, US Department of Labor, DC [E]
Rep. Occupational Safety & Health Administration
Chris Farrell, NFPA Staff Liaison

This list represents the membership at the time the Committee was balloted on the final text of this edition. Since that time, changes in the membership may have occurred. A key to classifications is found at the back of the document.

NOTE: Membership on a committee shall not in and of itself constitute an endorsement of the Association or any document developed by the committee on which the member serves.

Committee Scope: This Committee shall have primary responsibility for documents on respiratory protection equipment and selection, care, and maintenance of respiratory protection equipment for non-firefighting emergency services operations including, but not limited to, tactical law enforcement, confined space, and hazardous materials operations, during incidents involving hazardous or oxygen-deficient atmospheres. This Committee does not cover respiratory protection equipment for firefighting operations addressed by the Technical Committee on Respiratory Protection Equipment.

Contents

Chapter 1 Administration	1986- 6	7.10 EOSTI Alarm Recognition.	1986- 21
1.1 Scope.	1986- 6	7.11 Additional SCBA HUD Performance.	1986- 21
1.2 Purpose.	1986- 6	7.12 RIC UAC Performance Requirements.	1986- 21
1.3 Application.	1986- 6	7.13 Breathing Air Pressure Vessel Performance Requirements.	1986- 21
1.4 Units.	1986- 7	7.14 Supplementary Voice Communications System Performance Requirements.	1986- 21
Chapter 2 Referenced Publications	1986- 7	7.15 Immersion Leakage Performance Requirements.	1986- 21
2.1 General.	1986- 7	7.16 Low Power Capacity.	1986- 21
2.2 NFPA Publications.	1986- 7	7.17 Emergency Breathing Safety System Cold Temperature Performance Requirements.	1986- 21
2.3 Other Publications.	1986- 7	7.18 Optional Toxic Industrial Chemical Permeation Resistance Performance Requirement.	1986- 22
2.4 References for Extracts in Mandatory Sections. (Reserved)	1986- 7		
Chapter 3 Definitions	1986- 7	Chapter 8 Test Methods	1986- 22
3.1 General.	1986- 7	8.1 Airflow Performance Test.	1986- 22
3.2 NFPA Official Definitions.	1986- 7	8.2 Environmental Temperature Tests.	1986- 26
3.3 General Definitions.	1986- 8	8.3 Vibration Test.	1986- 28
Chapter 4 Certification	1986- 10	8.4 Accelerated Corrosion Test.	1986- 30
4.1 General.	1986- 10	8.5 Particulate Test.	1986- 30
4.2 Certification Program.	1986- 10	8.6 Facepiece Lens Abrasion Test.	1986- 31
4.3 Inspections and Testing.	1986- 11	8.7 Nonelectronic Communications Test.	1986- 34
4.4 Recertification.	1986- 13	8.8 Flame Test.	1986- 36
4.5 Manufacturers' Quality Assurance Programs.	1986- 13	8.9 Facepiece Carbon Dioxide Content Test.	1986- 41
4.6 Hazards Involving Compliant Product.	1986- 14	8.10 EOSTI Recognition Test.	1986- 41
4.7 Manufacturers' Investigations of Complaints and Returns.	1986- 14	8.11 HUD Wiring Connection Strength Test.	1986- 42
4.8 Manufacturers' Safety Alert and Product Recall Systems.	1986- 14	8.12 HUD Low Power Source Alert Signal Test.	1986- 42
Chapter 5 Labeling and Information	1986- 15	8.13 HUD Visibility Tests.	1986- 43
5.1 Product Label Requirements.	1986- 15	8.14 Light Test.	1986- 43
5.2 User Information.	1986- 15	8.15 HUD Disabling Glare Test.	1986- 44
Chapter 6 Design Requirements	1986- 16	8.16 Breathing Air Pressure Vessel Refill Breathing Performance Test.	1986- 44
6.1 General Design Requirements.	1986- 16	8.17 RIC UAC System Fill Rate Test.	1986- 45
6.2 End-of-Service-Time Indicator (EOSTI) Design Requirements.	1986- 16	8.18 Breathing Air Pressure Vessel and Valve Assembly Retention Test.	1986- 45
6.3 Optional HUD Design Requirements.	1986- 16	8.19 Immersion Leakage Test.	1986- 46
6.4 Optional Rapid Intervention Crew/Company Universal Air Connection (RIC UAC) Design Requirements.	1986- 17	8.20 Breathing Air Pressure Vessel Connections and Accessibility Test.	1986- 46
6.5 Power Source Design Requirements.	1986- 18	8.21 Supplementary Voice Communications System Performance Test.	1986- 47
6.6 Optional Emergency Breathing Safety System (EBSS) Design Requirements.	1986- 19	8.22 Low Power Capacity Test.	1986- 49
6.7 Accessories Design Requirements.	1986- 19	8.23 Emergency Breathing Safety System (EBSS) Cold Temperature Performance Test.	1986- 49
Chapter 7 Performance Requirements	1986- 19	8.24 Optional Toxic Industrial Chemical Permeation Resistance Test.	1986- 50
7.1 Airflow Performance.	1986- 19		
7.2 Environmental Temperature Performance.	1986- 19	Annex A Explanatory Material	1986- 53
7.3 Vibration Resistance Performance.	1986- 20	Annex B Surrogate Breathing Air Pressure Vessel Preparation Procedure	1986- 57
7.4 Corrosion Resistance Performance.	1986- 20	Annex C Informational References	1986- 58
7.5 Particulate Resistance Performance.	1986- 20	Index	1986- 59
7.6 Facepiece Lens Abrasion Resistance Performance.	1986- 20		
7.7 Nonelectronic Communications Performance Requirements.	1986- 20		
7.8 Flame Resistance Performance.	1986- 21		
7.9 Carbon Dioxide (CO ₂) Content Performance.	1986- 21		

NFPA 1986

Standard on

Respiratory Protection Equipment for Tactical and Technical Operations

2023 Edition

IMPORTANT NOTE: This NFPA document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading "Important Notices and Disclaimers Concerning NFPA Standards." They can also be viewed at www.nfpa.org/disclaimers or obtained on request from NFPA.

UPDATES, ALERTS, AND FUTURE EDITIONS: New editions of NFPA codes, standards, recommended practices, and guides (i.e., NFPA Standards) are released on scheduled revision cycles. This edition may be superseded by a later one, or it may be amended outside of its scheduled revision cycle through the issuance of Tentative Interim Amendments (TIAs). An official NFPA Standard at any point in time consists of the current edition of the document, together with all TIAs and Errata in effect. To verify that this document is the current edition or to determine if it has been amended by TIAs or Errata, please consult the National Fire Codes® Subscription Service or the "List of NFPA Codes & Standards" at www.nfpa.org/docinfo. In addition to TIAs and Errata, the document information pages also include the option to sign up for alerts for individual documents and to be involved in the development of the next edition.

NOTICE: An asterisk (*) following the number or letter designating a paragraph indicates that explanatory material on the paragraph can be found in Annex A.

A reference in brackets [] following a section or paragraph indicates material that has been extracted from another NFPA document. Extracted text may be edited for consistency and style and may include the revision of internal paragraph references and other references as appropriate. Requests for interpretations or revisions of extracted text shall be sent to the technical committee responsible for the source document.

Information on referenced and extracted publications can be found in Chapter 2 and Annex C.

Chapter 1 Administration

1.1 Scope.

1.1.1* This standard shall specify the minimum requirements for the design, performance, testing, and certification of (1) new compressed breathing air open-circuit self-contained breathing apparatus (SCBA) and compressed breathing air combination open-circuit self-contained breathing apparatus and supplied air respirators (SCBA/SARs); and (2) replacement parts, components, and accessories for those respirators.

1.1.2 Reserved.

1.1.3 This standard shall not specify requirements for respiratory protection equipment that is used for firefighting operations.

1.1.4 This standard shall not specify requirements for other types of SCBA.

1.1.5* This standard shall not specify requirements for any accessories that could be attached to the certified product that

are not certified by the National Institute for Occupational Safety and Health (NIOSH).

1.1.6 This standard shall not establish criteria for SCBA for underwater operations.

1.1.7 This standard shall not establish criteria for protection from ionizing radiation.

1.1.8 This standard shall not be construed as addressing all the safety concerns associated with the use of compliant SCBA and combination SCBA/SARs. It shall be the responsibility of the persons and organizations that use compliant SCBA and combination SCBA/SARs to establish safety and health practices and to determine the applicability of regulatory limitations prior to use.

1.1.9 This standard shall not be construed as addressing all the safety concerns, if any, associated with the use of this standard by testing facilities. It shall be the responsibility of the persons and organizations that use this standard to conduct testing of SCBA and combination SCBA/SARs to establish safety and health practices and to determine the applicability of regulatory limitations prior to using this standard for any designing, manufacturing, and testing.

1.1.10 Nothing herein shall restrict any jurisdiction or manufacturer from exceeding these minimum requirements.

1.2 Purpose.

1.2.1 The purpose of this standard shall be to establish minimum levels of SCBA performance for respiratory protection of emergency services personnel in nonfirefighting operations in atmospheres that are categorized as immediately dangerous to life or health (IDLH).

1.2.2* Controlled laboratory tests used to determine compliance with the performance requirements of this standard shall not be deemed as establishing performance levels for all respiratory protective situations and IDLH atmospheres to which personnel can be exposed.

1.2.3 This standard shall not be interpreted or used as a detailed manufacturing or purchase specification but shall be permitted to be referenced in purchase specifications as minimum requirements.

1.3 Application.

1.3.1 This standard shall apply to all open-circuit SCBA and combination SCBA/SARs used by emergency services organizations for respiratory protection of its personnel during but not limited to rescue, hazardous materials response, tactical law enforcement operations, confined space entry, terrorist incident response, and similar operations where oxygen deficiency, particulates, toxic products, products of combustion, or other IDLH atmospheres exist or could exist at the incident scene.

1.3.1.1* If the SCBA is equipped with an emergency breathing safety system (EBSS), the EBSS performance requirements set forth in this standard shall apply only to open-circuit SCBA and combination SCBA/SARs used by emergency services personnel for respiratory protection of its personnel during the applications listed in 1.3.1.

1.3.2 This standard shall apply to the design, manufacturing, testing, and certification of new open-circuit SCBA and combination SCBA/SARs.

1.3.3 This standard shall not apply to accessories that can be attached to an open-circuit SCBA and combination SCBA/SARs but are not certified by NIOSH for use with that specific SCBA or combination SCBA/SARs.

1.3.4 Reserved.

1.3.5 This standard shall not apply to closed-circuit SCBA.

1.3.6* This standard shall not apply to the use of SCBA and combination SCBA/SARs.

1.4 Units.

1.4.1 In this standard, values for measurement are followed by an equivalent in parentheses, but only the first stated value shall be regarded as the requirement.

1.4.2 Equivalent values in parentheses shall not be considered as the requirement because those values might be approximate.

Chapter 2 Referenced Publications

2.1 General. The documents or portions thereof listed in this chapter are referenced within this standard and shall be considered part of the requirements of this document.

2.2 NFPA Publications. National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02169-7471.

NFPA 1989, *Standard on Breathing Air Quality for Emergency Services Respiratory Protection*, 2019 edition.

NFPA 1990, *Standard for Protective Ensembles for Hazardous Materials and CBRN Operations*, 2022 edition.

2.3 Other Publications.

2.3.1 ANSI Publications. American National Standards Institute, Inc. (operations) 25 West 43rd Street, 4th Floor, New York, NY 10036; (headquarters) 1899 L Street, NW, 11th Floor, Washington, DC 20036.

ANSI/ASA S3.2, *Method for Measuring the Intelligibility of Speech over Communication Systems*, 2009 (R2014).

2.3.2 ASTM Publications. ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959.

ASTM B117, *Standard Test Method for Salt Spray (Fog) Testing*, 2003.

ASTM D1003, *Standard Test Method for Haze and Luminous Transmittance of Transparent Plastics*, 2000.

2.3.3 EBU Publications. European Broadcasting Union, Department of Technology & Innovation, L'Ancienne-Route 17A, CH-1218 Grand-Saconnex, Geneva, Switzerland.

EBU Technical Recommendation R68, *Alignment level in digital audio production equipment and in digital audio recorders*, 2000.

2.3.4 EN Publications (CEN). European Committee for Standardization Central Secretariat, rue de Stassart 36, B 1050 Brussels, Belgium.

EN 136, *Respiratory protective devices — Full face masks — Requirements, testing, marking*, 1998.

2.3.5 IEC Publications. International Electrotechnical Commission, 3, rue de Varembe, P.O. Box 131, CH-1211 Geneva 20, Switzerland.

IEC 60268, *Sound System Equipment — Part 16: Objective Rating of Speech Intelligibility by Speech Transmission Index*, 2003.

2.3.6 ISO Publications. International Organization for Standardization, ISO Central Secretariat, BIBC II, Chemin de Blandinnet 8, CP 401 - 1214 Vernier, Geneva, Switzerland.

ISO Guide 27, *Guidelines for corrective action to be taken by a certification body in the event of misuse of its mark of conformity*, 1983.

ISO 9001, *Quality management systems — Requirements*, 2005.

ISO 16900-1, *Respiratory protective devices — Methods of test and test equipment — Part 1: Determination of inward leakage*, 2019.

ISO/IEC 17000, *Conformity assessment — Vocabulary and general principles*, 2004.

ISO/IEC 17011, *Conformity assessment — General requirements for accreditation bodies accrediting conformity assessment bodies*, 2004.

ISO/IEC 17021, *Conformity assessment — Requirements for bodies providing audit and certification of management systems*, 2011.

ISO/IEC 17025, *General requirements for the competence of testing and calibration laboratories*, 2005.

ISO/IEC 17065, *Conformity assessment — Requirements for bodies certifying products, processes and services*, 2012.

2.3.7 UL Publications. Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, IL 60062-2096.

ANSI/UL 913, *Standard for Intrinsically Safe Apparatus and Associated Apparatus for Use in Class I, II, and III, Division 1 Hazardous (Classified) Locations*, Sixth edition.

2.3.8 US Government Publications. US Government Publishing Office, 732 North Capitol Street, NW, Washington, DC 20401-0001.

Statement of Standard for NIOSH CBRN SCBA Testing, 2002.

Title 42, Code of Federal Regulations, Part 84, "Approval of Respiratory Protective Devices," 1 October 2004.

2.3.9 Other Publications.

Merriam-Webster's Collegiate Dictionary, 11th edition, Merriam-Webster, Inc., Springfield, MA, 2003.

2.4 References for Extracts in Mandatory Sections. (Reserved)

Chapter 3 Definitions

3.1 General. The definitions contained in this chapter shall apply to the terms used in this standard. Where terms are not defined in this chapter or within another chapter, they shall be defined using their ordinarily accepted meanings within the context in which they are used. *Merriam-Webster's Collegiate Dictionary*, 11th edition, shall be the source for the ordinarily accepted meaning.

3.2 NFPA Official Definitions.

3.2.1* Approved. Acceptable to the authority having jurisdiction.

3.2.2* Authority Having Jurisdiction (AHJ). An organization, office, or individual responsible for enforcing the requirements of a code or standard, or for approving equipment, materials, an installation, or a procedure.

3.2.3 Labeled. Equipment or materials to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the authority having jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled equipment or materials, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.

3.2.4* Listed. Equipment, materials, or services included in a list published by an organization that is acceptable to the authority having jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production of listed equipment or materials or periodic evaluation of services, and whose listing states that either the equipment, material, or service meets appropriate designated standards or has been tested and found suitable for a specified purpose.

3.2.5 Shall. Indicates a mandatory requirement.

3.2.6 Should. Indicates a recommendation or that which is advised but not required.

3.2.7 Standard. An NFPA standard, the main text of which contains only mandatory provisions using the word “shall” to indicate requirements and that is in a form generally suitable for mandatory reference by another standard or code or for adoption into law. Nonmandatory provisions are not to be considered a part of the requirements of a standard and shall be located in an appendix, annex, footnote, informational note, or other means as permitted in the NFPA manuals of style. When used in a generic sense, such as in the phrases “standards development process” or “standards development activities,” the term “standards” includes all NFPA standards, including codes, standards, recommended practices, and guides.

3.3 General Definitions.

3.3.1 Accessory. Any item that could be attached to a certified product but that is not necessary for the certified product to meet the requirements of the standard.

3.3.2 Accreditation. Third-party attestation related to a conformity assessment body conveying formal demonstration of its competence to carry out specific conformity assessment tasks. These tasks include sampling and testing, inspection, certification, and registration. [ISO/IEC 17000, 2004]

3.3.3 Atmosphere-Supplying Respirator. A respirator that supplies the user with breathing air from a source independent of the ambient atmosphere and includes a self-contained breathing apparatus (SCBA) and/or a supplied air respirator (SAR). [See also 3.3.13, *Combination SCBA/SAR*; 3.3.55, *Self-Contained Breathing Apparatus (SCBA)*; and 3.3.63, *Supplied Air Respirator (SAR)*.]

3.3.4 Audit. Systematic, independent, documented process for obtaining records, statements of fact or other relevant information and assessing them objectively to determine the extent to which specified requirements are fulfilled. [ISO/IEC 17000, 2004]

3.3.5 Breathing Air. See 3.3.17, *Compressed Breathing Air*.

3.3.6 Breathing Air/Gas Container. See 3.3.7, *Breathing Air Pressure Vessel*.

3.3.7 Breathing Air Pressure Vessel. The pressure vessel or vessels that are an integral part of the SCBA and contain the breathing gas supply; can be configured as a single breathing air pressure vessel or other pressure vessel, or as multiple breathing air pressure vessels.

3.3.8 Certification. A system whereby a certification organization determines that a manufacturer has demonstrated the ability to produce a product that complies with the requirements of this standard, authorizes the manufacturer to use a label on listed products that comply with the requirements of this standard, and establishes a follow-up program conducted by the certification organization as a check on the methods the manufacturer uses to determine continued compliance of labeled and listed products with the requirements of this standard.

3.3.9 Certification Organization. An independent third-party organization that determines product compliance with the requirements of this standard with a labeling/listing/follow-up program.

3.3.10 Certified. The resultant condition of a product having undergone certification in accordance with the requirements of this standard. (See also 3.3.42, *NIOSH Certified*.)

3.3.11 Char. The formation of a brittle residue when material is exposed to thermal energy.

3.3.12 Closed-Circuit SCBA. A recirculation-type SCBA in which the wearer rebreathes exhaled gas after the carbon dioxide has been removed from the exhalation gas and the oxygen content within the system has been restored from sources such as compressed breathing air, chemical oxygen, liquid oxygen, or compressed gaseous oxygen.

3.3.13* Combination SCBA/SAR. An atmosphere-supplying respirator that supplies a respirable atmosphere to the user from a combination of two breathing air sources that both are independent of the ambient environment. [See also 3.3.3, *Atmosphere-Supplying Respirator*; 3.3.55, *Self-Contained Breathing Apparatus (SCBA)*; and 3.3.63, *Supplied Air Respirator (SAR)*.]

3.3.14 Compliance. The condition of meeting or exceeding all applicable requirements of this standard.

3.3.15 Compliant. Meeting or exceeding all applicable requirements of this standard.

3.3.16* Component. Any material, part, or subassembly used in the construction of the compliant product.

3.3.17* Compressed Breathing Air. A respirable gas mixture derived from normal atmospheric air or from manufactured synthetic air, stored in a compressed state in storage breathing air pressure vessels and respirator breathing air pressure vessels, and supplied to the user in a gaseous form.

3.3.18 Demand SCBA. See 3.3.41, *Negative Pressure SCBA*.

3.3.19 Drip. To run or fall in drops or blobs.

3.3.20 EBSS. Emergency breathing safety system.

3.3.21 Emergency Breathing Safety System (EBSS). A device on an SCBA that allows users to share their available air supply in an emergency situation.

3.3.22 End-of-Service-Time Indicator (EOSTI). A warning device on an SCBA that warns the user that the end of the breathing air supply is approaching.

3.3.23 EOSTI. End-of-service-time indicator.

3.3.24 Fabric Component. Natural or synthetic material of combination of materials that is pliable and made by weaving, felting, forming, or knitting.

3.3.25 Facepiece. The component of an SCBA that covers the wearer's nose, mouth, and eyes.

3.3.26 Follow-Up Program. The sampling, inspections, tests, or other measures conducted by the certification organization on a periodic basis to determine the continued compliance of labeled and listed products that are being produced by the manufacturer to the requirements of this standard.

3.3.27 Gas. Matter in a gaseous state at standard temperature and pressure.

3.3.28 HATS. Head and torso simulator.

3.3.29 Haze. Light that is scattered as a result of passing through a transparent object.

3.3.30 Head and Torso Simulator (HATS). A mannequin with built-in ear and mouth simulators that provides a realistic reproduction of the acoustic properties of an average adult human head and torso.

3.3.31 Heads-Up Display (HUD). Visual display of information and system condition status visible to the wearer.

3.3.32 HUD. Heads-up display.

3.3.33 Identical SCBA. SCBA that are produced to the same engineering and manufacturing specifications.

3.3.34 Inspection. Examination of a product design, product, process or installation and determination of its conformity with specific requirements or, on the basis of professional judgment, with general requirements. [ISO/IEC 17000, 2004]

3.3.35 Manufacturer. The entity that directs and controls any of the following: compliant product design, compliant product manufacturing, or compliant product quality assurance; also, the entity that assumes liability for the compliant product or provides the warranty for a compliant product.

3.3.36 Melt. A response to heat by a material resulting in evidence of flowing or dripping.

3.3.37 Microphone Measurement Point (MMP). A point 1.5 m in front of and on the axis of the lip position of typical human mouth (or artificial mouth) and 1.5 m above the floor.

3.3.38 MMP. Microphone measurement point.

3.3.39 Mouth Reference Point (MRP). A point 50 mm in front of and on the axis of the lip position of a typical human mouth (or artificial mouth).

3.3.40 MRP. Mouth reference point.

3.3.41 Negative Pressure SCBA. An SCBA in which the pressure inside the facepiece, in relation to the pressure surrounding the outside of the facepiece, is negative during any part of

the inhalation or exhalation cycle when tested by NIOSH in accordance with 42 CFR 84.

3.3.42* NIOSH Certified. Tested and certified by the National Institute for Occupational Safety and Health (NIOSH) of the US Department of Health and Human Services in accordance with the requirements of 42 CFR 84, Subpart H.

3.3.43 Open-Circuit SCBA. An SCBA in which exhalation is vented to the atmosphere and not rebreathed.

3.3.44 Pink Noise. Noise that contains constant energy per octave band.

3.3.45 Positive Pressure SCBA. See 3.3.46, Pressure Demand SCBA.

3.3.46 Pressure Demand SCBA. An SCBA in which the pressure inside the facepiece, in relation to the pressure surrounding the outside of the facepiece, is positive during both inhalation and exhalation when tested by NIOSH in accordance with 42 CFR 84, Subpart H.

3.3.47* Product Label. A marking provided by the manufacturer for each compliant product containing compliance statements, certification statements, manufacturer and model information, or similar data.

3.3.48 Rapid Intervention Crew/Company Universal Air Connection (RIC UAC). A system that allows emergency replenishment of breathing air to the SCBA of disabled or entrapped fire or emergency services personnel.

3.3.49 Rated Service Time. The period of time, stated on an SCBA's NIOSH certification label, that the SCBA supplied air to the breathing machine when tested to 42 CFR 84, Subpart H.

3.3.50 RIC. Rapid intervention crew/company.

3.3.51 Sample. (1) Product, component, or accessory randomly selected from the manufacturer's production line, the manufacturer's inventory, or the open market. (2) Product, component, or accessory that is conditioned for testing. (See also 3.3.59, *Specimen*.)

3.3.52 SAR. Supplied air respirator.

3.3.53 SCBA. Self-contained breathing apparatus.

3.3.54 SCBA/SAR. Self-contained breathing apparatus/supplied air respirator. [See also 3.3.13, *Combination SCBA/SAR*; 3.3.55, *Self-Contained Breathing Apparatus (SCBA)*; and 3.3.63, *Supplied Air Respirator (SAR)*.]

3.3.55* Self-Contained Breathing Apparatus (SCBA). An atmosphere-supplying respirator the breathing air source of which is designed to be carried by the user.

3.3.56 Service Life. The period for which compliant product should be useful before retirement.

3.3.57 Service Time. See 3.3.49, Rated Service Time.

3.3.58 Sound Pressure Level (SPL). The local pressure deviation from the ambient (average, or equilibrium) atmospheric pressure caused by a sound wave.

3.3.59 Specimen. The conditioned product, component, or accessory that is tested. Specimens are taken from samples. (See also 3.3.51, *Sample*.)

3.3.60 Speech Transmission Index (STI). A measure of intelligibility of speech quality on a scale of intelligibility, the values of which vary from 0 (completely unintelligible) to 1 (perfect intelligibility).

3.3.61 SPL. Sound pressure level.

3.3.62 STI. Speech transmission index.

3.3.63* Supplied Air Respirator (SAR). An atmosphere-supplying respirator for which the source of breathing air is not designed to be carried by the user; also known as an *airline respirator*. [See also 3.3.3, *Atmosphere-Supplying Respirator*; 3.3.13, *Combination SCBA/SAR*; and 3.3.55, *Self-Contained Breathing Apparatus (SCBA)*.]

3.3.64 Synthetic Breathing Air. Manufactured breathing air produced by blending nitrogen and oxygen. (See also 3.3.17, *Compressed Breathing Air*)

3.3.65 Testing. Determination of one or more characteristics of an object of conformity assessment, according to a procedure. Testing typically applies to materials, products or processes. [ISO/IEC 17000, 2004]

3.3.66 UAC. Universal air connection.

3.3.67 Universal Air Connection (UAC). The male fitting affixed to the SCBA and the female fitting affixed to the filling hose that allow emergency replenishment of breathing air to an SCBA breathing air pressure vessel. Also known as Rapid Intervention Crew/Company Universal Air Connection.

3.3.68 Variant. A grouping of subassemblies (i.e., components) having common functional and/or design characteristics, the assembly of multiple variants of which results in an SCBA model configuration.

Chapter 4 Certification

4.1 General.

4.1.1 The process for certification of SCBA as being compliant with NFPA 1986 shall meet the requirements of Sections 4.1 through 4.8.

4.1.2 Prior to certification of SCBA to the requirements of this standard, the SCBA shall be NIOSH certified.

4.1.2.1 SCBA shall have NIOSH certification as positive pressure.

4.1.2.2 SCBA that are NIOSH certified as positive pressure but that are capable of supplying air to the user in a negative pressure demand-type mode shall not be certified to this standard.

4.1.3 SCBA and accessories that are certified as compliant with NFPA 1986 shall also be certified by NIOSH as compliant with the *Statement of Standard for NIOSH CBRN SCBA Testing*.

4.1.4 All SCBA that are labeled as being compliant with this standard shall meet or exceed all applicable requirements specified in this standard and shall be certified. This certification shall be in addition to, and shall not be construed to be the same as, the NIOSH certification specifically defined in 3.3.42.

4.1.5 All certification shall be performed by a certification organization that meets at least the requirements specified in Section 4.2, Certification Program, and that is accredited for

personal protective equipment in accordance with ISO/IEC 17065, *Conformity assessment — Requirements for bodies certifying products, processes and services*.

4.1.6 Manufacturers shall not claim compliance with a portion(s) or segment(s) of the requirements of this standard and shall not use the name or identification of this standard, NFPA 1986, in any statements about their respective product(s) unless the product(s) is certified as compliant with this standard.

4.1.7 All compliant SCBA shall be listed by the certification organization, and the listing shall uniquely identify the certified product by, at a minimum, style or model number.

4.1.8 All compliant SCBA shall have a product label that meets the requirements specified in Chapter 5.

4.1.9 The certification organization's label, symbol, or identifying mark shall be attached to the product label, shall be part of the product label, or shall be immediately adjacent to the product label.

4.1.10 Reserved.

4.1.11 Reserved.

4.1.12 Reserved.

4.2 Certification Program.

4.2.1* The certification organization shall not be owned or controlled by manufacturers or vendors of the product being certified.

4.2.2 The certification organization shall be primarily engaged in certification work and shall not have a monetary interest in the product's ultimate profitability.

4.2.3 The certification organization shall be accredited for personal protective equipment in accordance with ISO/IEC 17065, *Conformity assessment — Requirements for bodies certifying products, processes and services*, and the accreditation shall be issued by an accreditation body operating in accordance with ISO/IEC 17011, *Conformity assessment — General requirements for accreditation bodies accrediting conformity assessment bodies*.

4.2.4 The certification organization shall refuse to certify products to this standard that do not comply with all applicable requirements of this standard.

4.2.5* The contractual provisions between the certification organization and the manufacturer shall specify that certification is contingent on compliance with all applicable requirements of this standard.

4.2.5.1 The certification organization shall not offer or confer any conditional, temporary, or partial certifications.

4.2.5.2 Manufacturers shall not be authorized to use any label or reference to the certification organization on products that are not compliant with all applicable requirements of this standard.

4.2.6* The certification organization shall have laboratory facilities and equipment available for conducting proper tests to determine product compliance.

4.2.6.1 The certification organization laboratory facilities shall have a program in place and functioning for calibration of all

instruments, and procedures shall be in use to ensure proper control of all testing.

4.2.6.2 The certification organization laboratory facilities shall follow good practice regarding the use of laboratory manuals, form data sheets, documented calibration and calibration routines, performance verification, proficiency testing, and staff qualification and training programs.

4.2.7 The certification organization shall require the manufacturer to establish and maintain a quality assurance program that meets the requirements of Section 4.5.

4.2.7.1 The certification organization shall require the manufacturer to have a product recall system specified in Section 4.8 as part of the manufacturer's quality assurance program.

4.2.7.2 The certification organization shall audit the manufacturer's quality assurance program to ensure that the quality assurance program provides continued product compliance with this standard.

4.2.8 The certification organization and the manufacturer shall evaluate any changes affecting the form, fit, or function of the compliant product to determine its continued certification to the 2023 edition of NFPA 1986.

4.2.8.1 Reserved.

4.2.8.2 Reserved.

4.2.9* The certification organization shall have a follow-up inspection program of the manufacturing facilities of the compliant product, with at least two random and unannounced visits per 12-month period to verify the product's continued compliance.

4.2.9.1 As part of the follow-up inspection program, the certification organization shall select sample product at random from the manufacturer's production line, the manufacturer's in-house stock, or the open market.

4.2.9.2 Sample product shall be evaluated by the certification organization to verify the product's continued compliance in order to ensure that the materials, components, and manufacturing quality assurance systems are consistent with the materials, components, and manufacturing quality assurance that were inspected and tested by the certification organization during initial certification and recertification.

4.2.9.3 The certification organization shall be permitted to conduct specific testing to verify the product's continued compliance.

4.2.9.4 For products, components, and materials for which prior testing, judgment, and experience of the certification organization have shown results to be in jeopardy of not complying with this standard, the certification organization shall conduct more frequent testing of sample product, components, and materials acquired in accordance with 4.2.9.1 against the applicable requirements of this standard.

4.2.10 The certification organization shall have in place a series of procedures, as specified in Section 4.6, that address report(s) of situation(s) in which a compliant product is subsequently found to be hazardous.

4.2.11 The certification organization's operating procedures shall provide a mechanism for the manufacturer to appeal decisions. The procedures shall include the presentation of infor-

mation from both sides of a controversy to a designated appeals panel.

4.2.12 The certification organization shall be in a position to use legal means to protect the integrity of its name and label. The name and label shall be registered and legally defended.

4.3* Inspections and Testing.

4.3.1 For both certification and recertification of SCBA, the certification organization shall conduct both the inspection and the testing specified in this section.

4.3.2 All inspections, evaluations, conditioning, and testing for certification or recertification shall be conducted by a certification organization's testing laboratory that is accredited in accordance with the requirements of ISO/IEC 17025, *General requirements for the competence of testing and calibration laboratories*.

4.3.2.1 The certification organization's testing laboratory's scope of accreditation to ISO/IEC 17025, *General requirements for the competence of testing and calibration laboratories*, shall encompass testing of personal protective equipment.

4.3.2.2 The accreditation of a certification organization's testing laboratory shall be issued by an accreditation body operating in accordance with ISO/IEC 17011, *Conformity assessment — General requirements for accreditation bodies accrediting conformity assessment bodies*.

4.3.3 A certification organization shall be permitted to utilize conditioning and testing results conducted by a product or component manufacturer for certification or recertification provided the manufacturer's testing laboratory meets the requirements specified in 4.3.3.1 through 4.3.3.5.

4.3.3.1 The manufacturer's testing laboratory shall be accredited in accordance with the requirements of ISO/IEC 17025, *General requirements for the competence of testing and calibration laboratories*.

4.3.3.2 The manufacturer's testing laboratory's scope of accreditation to ISO/IEC 17025, *General requirements for the competence of testing and calibration laboratories*, shall encompass testing of personal protective equipment.

4.3.3.3 The accreditation of a manufacturer's testing laboratory shall be issued by an accreditation body operating in accordance with ISO/IEC 17011, *Conformity assessment — General requirements for accreditation bodies accrediting conformity assessment bodies*.

4.3.3.4 The certification organization shall approve the manufacturer's testing laboratory.

4.3.3.5 The certification organization shall determine the level of supervision and witnessing of the conditioning and testing for certification or recertification conducted at the manufacturer's testing laboratory.

4.3.4 Sampling levels for testing and inspection shall be established by the certification organization and the manufacturer to ensure a reasonable and acceptable reliability at a reasonable and acceptable confidence level that products certified to this standard are compliant, unless such sampling levels are specified herein.

4.3.5 Inspection by the certification organization shall include a review of all product labels to ensure that all required label

attachments, compliance statements, certification statements, and other product information are at least as specified for the SCBA in Section 5.1.

4.3.6 Inspection by the certification organization shall include an evaluation of any symbols and pictorial graphic representations used on product labels or in user information, as permitted in 5.1.5, to ensure that the symbols are clearly explained in the product's user information package.

4.3.7 Inspection by the certification organization shall include a review of the user information required by Section 5.2 to ensure that the information has been developed and is available.

4.3.8 Inspection and evaluation by the certification organization for determining compliance with the design requirements specified in Chapter 6 shall be performed on whole or complete products.

4.3.9 SCBA and SCBA components shall be subjected to the tests specified in Table 4.3.9 for each series.

4.3.10 SCBA shall be initially tested for certification and shall meet the performance requirements of three separate test series of Categories A, B, C, D, and E, as specified in Table 4.3.9. All tests within Categories A, B, C, D, and E, which are designed as cumulative damage tests, shall be conducted in the order specified.

4.3.11 SCBA lens components shall be initially tested for certification and shall meet the performance requirements of one test series of Category F, as specified in Table 4.3.9. SCBA component testing in Category F shall be conducted on test specimens as specified in the respective test method.

4.3.12 After certification, compliant SCBA and components of compliant SCBA shall be tested annually within 12 months of previous tests and shall meet the performance requirements of one test series of Categories A, B, C, D, E, and F, as specified in Table 4.3.9.

4.3.13 A minimum of five identical SCBA that are to be certified to this standard shall be selected from the manufacturer's production.

Table 4.3.9 Test Series

Test Order	Category A (SCBA #1)	Category B (SCBA #2)	Category C (SCBA #3)	Category D (SCBA #4)	Category E (SCBA #5)	Category F (SCBA #6)
1	Airflow (Section 8.1)	Airflow (Section 8.1)	Airflow (Section 8.1)	Airflow (Section 8.1)	Low power capacity (Section 8.22)	Facepiece lens abrasion (Section 8.6)
2	Facepiece carbon dioxide content (Section 8.9)	Breathing air pressure vessel and valve assembly retention (Section 8.18)	EOSTI recognition (Section 8.10)	Flame (Section 8.8)	Immersion leakage (Section 8.19)	
3	Nonelectronic communications (Section 8.7)	Breathing air pressure vessel connections and accessibility (Section 8.20)	HUD visibility (Section 8.13 through 8.15)	—	—	—
4	Supplementary voice communications system (Section 8.21)	RIC UAC breathing air pressure vessel refill breathing (Section 8.16)	HUD low power source visual alert signal (Section 8.12)	—	—	—
5	Environmental temperature (Section 8.2)	RIC UAC system fill rate (Section 8.17)	HUD wiring connection strength (Section 8.11)	—	—	—
6	EBSS cold temperature* (Section 8.23)	EBSS cold temperature* (Section 8.23)	Vibration (Section 8.3)	—	—	—
7	Particulate (Section 8.5)	Accelerated corrosion (Section 8.4)	—	—	—	—

*To be tested together.

4.3.14 The first SCBA shall be subjected to the tests listed in Category A, the second SCBA shall be subjected to the tests listed in Category B, the third SCBA shall be subjected to the tests in Category C, the fourth SCBA shall be subjected to the tests in Category D, and the fifth SCBA shall be subjected to the tests in Category E, as shown in Table 4.3.9.

4.3.15 Components from SCBA that are to be certified to this standard shall be subjected to the tests specified in Category F of Table 4.3.9. SCBA component testing in Category F shall be conducted on test specimens as specified in each respective test method.

4.3.16 The requirement specified in 4.3.12 shall be waived every fifth year when the testing required by 4.3.17 is conducted.

4.3.17 Compliant SCBA shall be tested and shall meet the performance requirements of three separate test series of Categories A, B, C, D, and E, as specified in Table 4.3.9, every fifth year from the date of the initial certification testing specified in 4.3.10.

4.3.18 SCBA lens components shall be tested and shall meet the performance requirements of one test series of Category F, as specified in Table 4.3.9, every fifth year from the date of the initial certification testing specified in 4.3.10. SCBA component testing in Category F shall be conducted on test specimens as specified in each respective test method.

4.3.19 The certification organization shall not allow any modifications, pretreatment, conditioning, or other such special processes of the product or any product component prior to the product's submission for evaluation and testing by the certification organization.

4.3.19.1 The certification organization shall accept from the manufacturer for evaluation and testing for certification only product or product components that are the same in every respect to the actual final product or product component.

4.3.19.2 The certification organization shall not allow the substitution, repair, or modification, other than as specifically permitted herein, of any product or any product component during testing.

4.3.20 No adjustment, repair, or replacement of parts shall be permitted to any SCBA being tested in accordance with this standard; however, breathing air pressure vessels shall be permitted to be filled as required.

4.3.21 Where SCBA are provided with an accessory or accessories that are certified by NIOSH in accordance with 42 CFR 84 for that specific SCBA, the SCBA with accessories installed shall be tested to all of the performance requirements specified in Chapter 7, and the accessories shall not cause degradation of the performance of the SCBA. The accessories themselves shall not be required to pass the performance testing unless specifically specified herein.

4.3.22 After completion of these tests for a specific model SCBA or its variant, only those tests on other similar SCBA models or variants shall be required where, in the determination of the certification organization, the SCBA's test results can be affected by any components or NIOSH-certified accessories that are different from those on the original SCBA tested.

4.3.23 Any modifications made to an SCBA or to any NIOSH-certified accessories provided for an SCBA by the SCBA manu-

facturer after certification shall require retesting and the meeting of the performance requirements of all those individual tests that the certification organization determines could be affected by such changes. This retesting shall be conducted before the modified SCBA is certified as being compliant with this standard.

4.3.24 The manufacturer shall maintain all design and performance inspection and test data from the certification organization used in the certification of the manufacturer's compliant product. The manufacturer shall provide such data, upon request, to the purchaser or authority having jurisdiction.

4.4 Recertification.

4.4.1 All SCBA models that are labeled as being compliant with this standard shall undergo recertification on an annual basis.

4.4.2 Recertification shall include inspection and evaluation to all design requirements and testing to all performance requirements as required by 4.3.8 and 4.3.12 on all manufacturer models and components.

4.4.3 The manufacturer shall maintain all design and performance inspection and test data from the certification organization used in the recertification of manufacturer models and components and shall provide such data, upon request, to the purchaser or authority having jurisdiction.

4.4.4 It is permissible for product to be manufactured for the follow-up inspection program to ensure correct configuration is available at the request of the certification organization. These samples shall be selected at random from a product completed on the manufacturer's production line.

4.5 Manufacturers' Quality Assurance Programs

4.5.1 The manufacturer shall provide and operate a quality assurance program that meets the requirements of this section and that includes a product recall system as specified in 4.2.7.1 and Section 4.8.

4.5.2 The operation of the quality assurance program shall evaluate and test compliant product production to the requirements of this standard to ensure that production remains in compliance.

4.5.3 The manufacturer shall be registered to ISO 9001, *Quality management systems — Requirements*.

4.5.3.1 Registration to the requirements of ISO 9001, *Quality management systems — Requirements*, shall be conducted by a registrar that is accredited for personal protective equipment.

4.5.3.2 Registrars specified in 4.5.3.1 shall be accredited for personal protective equipment in accordance with ISO/IEC 17021, *Conformity assessment — Requirements for bodies providing audit and certification of management systems*.

4.5.4* Any entity that does not manufacture or assemble the compliant product but meets the definition of *manufacturer* as specified in 3.3.35 and therefore is considered to be the "manufacturer" shall meet the requirements specified in Section 4.5.

4.5.5* Where the manufacturer uses subcontractors in the construction or assembly of the compliant product, the locations and names of all subcontractor facilities shall be docu-

mented, and the documentation shall be provided to the manufacturer's ISO registrar and the certification organization.

4.6 Hazards Involving Compliant Product.

4.6.1* The certification organization shall establish procedures to be followed where situation(s) are reported in which a compliant product is subsequently found to be hazardous. These procedures shall comply with the provisions of ISO Guide 27, *Guidelines for corrective action to be taken by a certification body in the event of misuse of its mark of conformity*, and as modified herein.

4.6.2* Where a report of a hazard involved with a compliant product is received by the certification organization, the certification organization shall contact NIOSH National Personal Protective Technology Laboratory (NIOSH/NPPTL), and the validity of the report shall be investigated following the procedures established by NIOSH/NPPTL.

4.6.3 With respect to a compliant product, a hazard shall be a condition or create a situation that results in exposing life, limb, or property to an imminently dangerous or dangerous condition.

4.6.4 Where a specific hazard is identified, the determination of the appropriate action for the manufacturer to undertake shall take into consideration the severity of the hazard and its consequences to the safety and health of users.

4.6.5 Where it is established that a hazard is involved with a compliant product, the certification organization, in coordination with NIOSH/NPPTL, shall determine the scope of the hazard, including products, model numbers, serial numbers, factory production facilities, production runs, and quantities involved.

4.6.6 The investigation shall include but not be limited to the extent and scope of the problem as it might apply to other compliant product or compliant product components manufactured by other manufacturers or certified by other certification organizations.

4.6.7 The certification organization, in coordination with NIOSH/NPPTL, shall also investigate reports of a hazard where compliant product is gaining widespread use in applications not foreseen when the standard was written, such applications in turn being ones for which the product was not certified, and no specific scope of application has been provided in the standard, and no limiting scope of application was provided by the manufacturer in written material accompanying the compliant product at the point of sale.

4.6.8 The certification organization, in coordination with NIOSH/NPPTL, shall require the manufacturer of the compliant product or the manufacturer of the compliant product component, if applicable, to assist the certification organization and NIOSH/NPPTL in the investigation and to conduct its own investigation as specified in Section 4.7.

4.6.9 Where the facts indicating a need for corrective action are conclusive and the manufacturer has exhausted all appeal rights, the certification organization, in coordination with NIOSH/NPPTL, shall initiate corrective action immediately, provided there is a manufacturer to be held responsible for such action.

4.6.10 Where the facts are conclusive and corrective action is indicated, but there is no manufacturer to be held responsible,

such as when the manufacturer has gone out of business or is bankrupt, the certification organization, in coordination with NIOSH/NPPTL, shall immediately notify relevant governmental and regulatory agencies and issue a notice to the user community about the hazard.

4.6.11* Where the facts are conclusive and corrective action is indicated, the certification organization, in coordination with NIOSH/NPPTL, shall take one or more of the following corrective actions:

- (1) Parties authorized and responsible for issuing a safety alert shall be notified when, in the opinion of the certification organization and NIOSH/NPPTL, such a safety alert is necessary to inform the users.
- (2) Parties authorized and responsible for issuing a product recall shall be notified when, in the opinion of the certification organization and NIOSH/NPPTL, such a recall is necessary to protect the users.
- (3) The mark of certification shall be removed from the product.
- (4) Where a hazardous condition exists and it is not practical to implement 4.6.11(1), 4.6.11(2), or 4.6.11(3), or the responsible parties refuse to take corrective action, the certification organization, in coordination with NIOSH/NPPTL, shall notify relevant governmental and regulatory agencies and issue a notice to the user community about the hazard.

4.6.12 The certification organization, in coordination with NIOSH/NPPTL, shall provide a report to the organization or individual identifying the reported hazardous condition and notify that organization or individual of the corrective action indicated or that no corrective action is indicated.

4.7 Manufacturers' Investigations of Complaints and Returns.

4.7.1 Manufacturers shall provide corrective action in accordance with ISO 9001, *Quality management systems — Requirements*, for investigating written complaints and returned products.

4.7.2 Manufacturers' records of returns and complaints related to safety issues shall be retained for at least 5 years.

4.7.3 Where the manufacturer discovers, during the review of specific returns or complaints, that a compliant product or compliant product component can constitute a potential safety risk to end users and is possibly subject to a safety alert or product recall, the manufacturer shall immediately contact NIOSH/NPPTL and the certification organization and provide all information about its review to assist NIOSH/NPPTL and the certification organization with their investigation.

4.8 Manufacturers' Safety Alert and Product Recall Systems.

4.8.1 Manufacturers shall establish a written safety alert system and a written product recall system that describes the procedures to be used in the event that they decide or are directed by the certification organization or NIOSH/NPPTL to either issue a safety alert or conduct a product recall.

4.8.2 The manufacturers' safety alert and product recall systems shall provide the following:

- (1) The establishment of a coordinator and responsibilities by the manufacturer for the handling of safety alerts and product recalls
- (2) A method of notifying all dealers, distributors, purchasers, users, and the National Fire Protection Association

(NFPA) about the safety alert or product recall that can be initiated within a 1-week period following the manufacturer's decision to issue a safety alert or conduct a product recall or after the manufacturer has been directed by NIOSH/NPPTL or the certification organization to issue a safety alert or conduct a product recall

- (3) Techniques for communicating accurately and understandably the nature of the safety alert or product recall and, in particular, the specific hazard or safety issue found to exist
- (4) Procedures for removing product that is recalled and for documenting the effectiveness of the product recall
- (5) A plan for repairing, replacing, or compensating purchasers for returned product

Chapter 5 Labeling and Information

5.1 Product Label Requirements.

5.1.1 In addition to the NIOSH certification label, each SCBA shall have an SCBA product label, which shall be permanently and conspicuously attached to the SCBA.

5.1.2 Multiple label pieces shall be permitted in order to carry all statements and information required to be on the SCBA product label; however, all label pieces of the product label shall be located adjacent to each other.

5.1.3 The certification organization's label, symbol, or identifying mark shall be attached to both the NIOSH certification label and the SCBA product label or be part of the product labels and shall be placed in a conspicuous location. All letters shall be at least 2.5 mm ($\frac{3}{32}$ in.) in height, and the label, symbol, or identifying mark shall be at least 6 mm ($\frac{15}{64}$ in.) in height.

5.1.4 All worded portions of both required product labels shall be at least in English.

5.1.5 Symbols and other pictorial graphic representations shall be permitted to be used to supplement worded statements on the product label(s).

5.1.6 The SCBA product label shall bear the following compliance statement legibly printed, and all letters and numbers shall be at least 2.5 mm ($\frac{3}{32}$ in.) in height:

**THIS SCBA MEETS THE REQUIREMENTS OF NFPA 1986,
STANDARD ON RESPIRATORY PROTECTION EQUIP-
MENT FOR TACTICAL AND TECHNICAL
OPERATIONS, 2023 EDITION.
DO NOT REMOVE THIS LABEL**

5.1.7 SCBA components, as listed on the NIOSH certification labels, shall be marked where practicable directly on the component with the lot number, serial number, or year and month of manufacture.

5.2 User Information.

5.2.1 The SCBA manufacturer shall provide with each SCBA at least the information, training materials, and user instructions specified within this section.

5.2.2 Upon request at the time of purchase, the SCBA manufacturer shall provide to the purchaser an information sheet with each SCBA that documents at least the following:

- (1) Manufacturer name and address

- (2) Manufacturing performance tests conducted at time of manufacture and the results
- (3) Date of manufacture
- (4) Model number
- (5) Serial number
- (6) Lot number, if applicable
- (7) Hydrostatic test dates and results, if applicable

5.2.3* Information or training materials regarding pre-use shall be provided at least on the following areas:

- (1) Safety considerations
- (2) Limitations of use
- (3) A statement of the minimum temperature for use of SCBA relative to the manufacturer-specified low temperature indicated in 7.2.2.1
- (4) Charging breathing air pressure vessels
- (5) Breathing air quality in accordance with NFPA 1989
- (6) Marking recommendations and restrictions
- (7) Warranty information
- (8) Recommended storage practices
- (9) Mounting on/in vehicles

5.2.4 Information or training materials regarding periodic inspections shall be provided at least on inspection frequency and details.

5.2.5 Information or training materials regarding donning and doffing shall be provided at least on the following areas:

- (1) Donning and doffing procedures
- (2) Adjustment procedures
- (3) Interface issues

5.2.6* Information or training materials regarding use shall be provided at least on the following areas:

- (1) Pre-use checks
- (2) Recharging breathing air pressure vessels
- (3) Qualification of breathing air pressure vessels
- (4) Emergency procedures to be followed in the event of damage, malfunction, or failure of the breathing apparatus
- (5) Emergency procedures to be followed in the event of an out-of-air situation
- (6) Cold-temperature operations relative to manufacturer-specified low temperature indicated in 7.2.2.1, and any specific care and maintenance procedures relative to use in these conditions

5.2.7* Information or training materials regarding periodic maintenance and cleaning shall be provided at least on the following areas:

- (1) Cleaning instructions and precautions
- (2) Disinfecting procedures
- (3) Maintenance frequency and details
- (4) Qualification of breathing air pressure vessels
- (5) Methods of repair, where applicable
- (6) Low power source signals and power source replacement, where applicable
- (7) Complete instructions for reporting to the manufacturer, certification organization, and NIOSH/NPPTL all returned equipment or complaints of damage, malfunction, or failure of the breathing apparatus that could present a hazard to the user

5.2.8 Information or training materials regarding retirement shall be provided at least on replacement/retirement considerations.

5.2.9 The SCBA manufacturer shall provide the manufacturer's specified component service life for composite breathing air pressure vessels and for all elastomeric components of the SCBA. This information shall be included at least in the maintenance information provided to the users.

Chapter 6 Design Requirements

6.1 General Design Requirements.

6.1.1 SCBA shall meet the applicable design requirements specified in this chapter where inspected and evaluated by the certification organization as specified in Section 4.3.

6.1.2 Prior to certification of SCBA to the requirements of this standard, SCBA shall be NIOSH certified in accordance with 42 CFR 84.

6.1.2.1 SCBA shall have NIOSH pressure-demand certification.

6.1.2.2 SCBA that are NIOSH pressure-demand certified but capable of supplying air to the user in a negative pressure demand-type mode shall not be certified to this standard.

6.1.3 SCBA that are certified as compliant with NFPA 1986 shall also be certified by NIOSH as compliant with the *Statement of Standard for NIOSH CBRN SCBA Testing*.

6.1.4 SCBA shall consist of all the components necessary for NIOSH certification in accordance with 42 CFR 84 and any additional components necessary to meet the requirements of this standard.

6.1.5 In addition to the breathing air pressure vessel-mounted breathing air pressure gauge, all SCBA shall have another breathing air pressure gauge that shall be capable of being viewed by the wearer when the SCBA is worn in accordance with the SCBA manufacturer's instructions.

6.1.5.1 A heads-up display (HUD) shall not be the sole device used to meet the requirements of 6.1.5.

6.1.5.2 If covered, the pressure gauge shall have tool-free access in accordance with 6.1.5.

6.1.6 The pressure gauge provided as part of the SCBA manufacturer's breathing air pressure vessel and valve assembly shall be readable by a person other than the wearer of the SCBA when the SCBA is worn in accordance with the SCBA manufacturer's instructions and with the breathing air pressure vessel securely retained in the SCBA backframe/carrier.

6.1.6.1 If covered, the pressure gauge shall have tool-free access in accordance with 6.1.6.

6.1.7 All SCBA shall be equipped with a facepiece that covers, at a minimum, the wearer's eyes, nose, and mouth.

6.1.8 All electric circuits integral to an SCBA or to any SCBA accessories shall be certified to the requirements for Class I, Groups C and D; Class II, Groups E, F, and G, Division 1 hazardous locations specified in ANSI/UL 913, *Standard for Intrinsically Safe Apparatus and Associated Apparatus for Use in Class I, II, and III, Division 1 Hazardous (Classified) Locations*.

6.1.9 All hardware, brackets, and snaps or other fasteners of SCBA or any NIOSH-certified accessories shall be free of rough spots, burrs, and sharp edges.

6.1.10 All SCBA shall have a voice communications capability that shall consist of a nonelectronic transmission system.

6.1.10.1 If the SCBA incorporates an optional electronic supplementary voice communications system, the supplementary voice communications system design shall incorporate an indication that the system has been activated.

6.1.10.2 The optional supplementary voice communications system's power source shall at a minimum provide upon activation an alert signal indicating low power capacity.

6.1.10.3 The optional supplementary voice communications system shall be designed to be switched on and off manually without the performance of the SCBA being affected.

6.1.10.4 Where the optional supplementary voice communications system is automatically activated, the operation of the on/off control shall override the auto activation of the supplementary voice communications system without affecting the performance of the SCBA.

6.2 End-of-Service-Time Indicator (EOSTI) Design Requirements.

6.2.1 All SCBA shall be equipped with a minimum of one EOSTI.

6.2.2 The EOSTI(s) shall be activated with no additional procedures than those required to activate the SCBA breathing system.

6.2.3 The EOSTI(s) shall meet the activation requirements of NIOSH certification as specified in 42 CFR 84.

6.2.4 Each EOSTI shall consist of at least the following:

- (1) A sensing mechanism
- (2) A signaling device

6.2.4.1 The sensing mechanism of the EOSTI(s) shall activate the signaling device(s).

6.2.4.2 The EOSTI(s) signaling devices shall provide notification to the SCBA user of the activation of the EOSTI by stimulating one or more human senses.

6.2.4.3 The EOSTI(s) shall be permitted to have more than one signaling device, and each signaling device shall be permitted to stimulate more than one human sense.

6.2.5 A failure mode and effects analysis shall be provided to the certification organization for the EOSTI(s).

6.2.5.1 The failure mode and effects analysis shall identify each potential failure mode for each component necessary for the EOSTI(s) to function.

6.2.5.2 For purposes of the failure mode and effects analysis, power sources other than the air from the SCBA breathing air pressure vessel shall be considered as part of the EOSTI(s).

6.2.6 The EOSTI alarm shall activate at 25 percent +4/-0 percent of full breathing air pressure vessel pressure.

6.3 Optional HUD Design Requirements.

6.3.1 The SCBA shall be permitted to be equipped with at least one heads-up display.

6.3.2 If the SCBA is equipped with a HUD, the HUD shall be activated with no additional procedures other than those required to activate the SCBA breathing system.

6.3.2.1 The HUD shall be permitted to be capable of being user controlled following activation.

6.3.2.1.1 User control function(s) shall include, but not be limited to, deactivation of the HUD visual pressure gauge display function.

6.3.2.2 If the HUD is used as the EOSTI, the EOSTI indication shall not be capable of being disabled.

6.3.2.3 The activation/deactivation of the HUD shall be performed external to the facepiece, and the user shall be able to operate the HUD without having to use special tools.

6.3.3 Each time the SCBA breathing system is activated with the breathing air pressure vessel pressure of 20 bar (290 psi) or greater, the HUD shall provide a visual indication of activation.

6.3.4 Where the HUD is provided with an external wiring disconnect, the wiring connector shall require two distinct actions for disconnection.

6.3.5 The HUD shall provide at least visual displays of alert signals and information.

6.3.6 All HUD visual displays shall be visible to the SCBA wearer with the SCBA and facepiece properly donned and regardless of the wearer's head movement.

6.3.7 The HUD shall not use color as the only means of differentiating between alert signal displays and informational displays.

6.3.8 Visual Alert Signals (when in the active mode).

6.3.8.1 The HUD shall display visual alert signals for breathing air pressure vessel content specified in 6.3.8.4.

6.3.8.2 In addition to the mandatory visual alert signals specified in 6.3.8.4, additional visual alert signals to indicate when other status or conditions have occurred shall be permitted.

6.3.8.3 Each visual alert signal shall be identifiable, by the SCBA wearer, from any other visual alert signals or other informational displays provided on the HUD or on the SCBA.

6.3.8.4 The HUD shall display a visual alert signal for breathing air pressure vessel content when the breathing air in the SCBA breathing air pressure vessel has been reduced to 50 percent of rated service content. This visual alert signal shall visibly flash at a frequency of not less than one per second for a minimum of 20 consecutive seconds.

6.3.9 Visual Informational Displays (when in the active mode).

6.3.9.1 The HUD shall display visual informational signals for at least breathing air pressure vessel content as specified in 6.3.9.5.

6.3.9.2 In addition to the mandatory visual informational signal specified in 6.3.9.5 additional visual informational signals to indicate when other status or conditions have occurred shall be permitted.

6.3.9.3 All visual displays of information shall be permitted to flash at a frequency of not less than one per second for a minimum of 10 consecutive seconds every 60 seconds.

6.3.9.4 Where the visual display is not constantly visible or is not visible for at least 10 consecutive seconds every 60 seconds, the HUD shall be provided with a manual activation of the display.

6.3.9.5 The HUD shall display a visual informational signal for breathing air pressure vessel content at 100 percent, 75 percent, 50 percent, and 25 percent of the breathing air pressure vessel's total rated service content.

6.3.9.5.1 The range of pressures under the EOSTI set point shall be visually obvious.

6.3.9.5.1.1 Where a gauge analog is used, the sub-EOSTI pressure range shall have a red background.

6.3.9.5.1.2 Where an electronic mode is used, the sub-EOSTI display of pressure shall flash at a frequency of not less than one per second for the remaining duration of the breathing air pressure vessel.

6.3.9.6 A display only in units of pressure shall not be permitted.

6.4* Optional Rapid Intervention Crew/Company Universal Air Connection (RIC UAC) Design Requirements.

6.4.1 The SCBA shall be permitted to be equipped with an RIC UAC male fitting to allow replenishment of breathing air to the SCBA breathing air pressure vessel.

6.4.2 If the SCBA is equipped with an RIC UAC, the RIC UAC male fitting shall meet the requirements specified in 6.4.4 and shall be located on each SCBA in a permanently fixed position.

6.4.2.1 The distance between the leading edge of the Compressed Gas Association (CGA) fitting at the outlet of the SCBA breathing air pressure vessel valve and the leading edge of the RIC UAC male fitting shall be a maximum of 100 mm (4 in.).

6.4.3 If the SCBA is equipped with an RIC UAC, a separate self-resetting relief valve shall be installed on the SCBA to protect the SCBA against overpressurization.

6.4.4 RIC UAC Male Fitting.

6.4.4.1 The RIC UAC male fitting shall be designed as specified in Figure 6.4.4.1.

6.4.4.2 The RIC UAC male fitting shall be capable of connecting to any RIC UAC female fitting.

6.4.4.3 The RIC UAC male fitting shall not interfere with any other operation of the SCBA.

6.4.4.4 RIC UAC male fittings shall be equipped with a dust cap or sealing plug to prevent dust, dirt, and debris from entering the fitting and to serve as a leakproof seal.

6.4.5 RIC UAC Female Fitting.

6.4.5.1 The RIC UAC female fitting shall be designed as specified in Figure 6.4.5.1.

6.4.5.2 The RIC UAC female fitting shall be capable of connecting to all RIC UAC male fittings.

6.4.5.3 RIC UAC female fittings shall be equipped with a dust cap or sealing plug to prevent dust, dirt, and debris from entering the fitting and to serve as a leakproof seal.

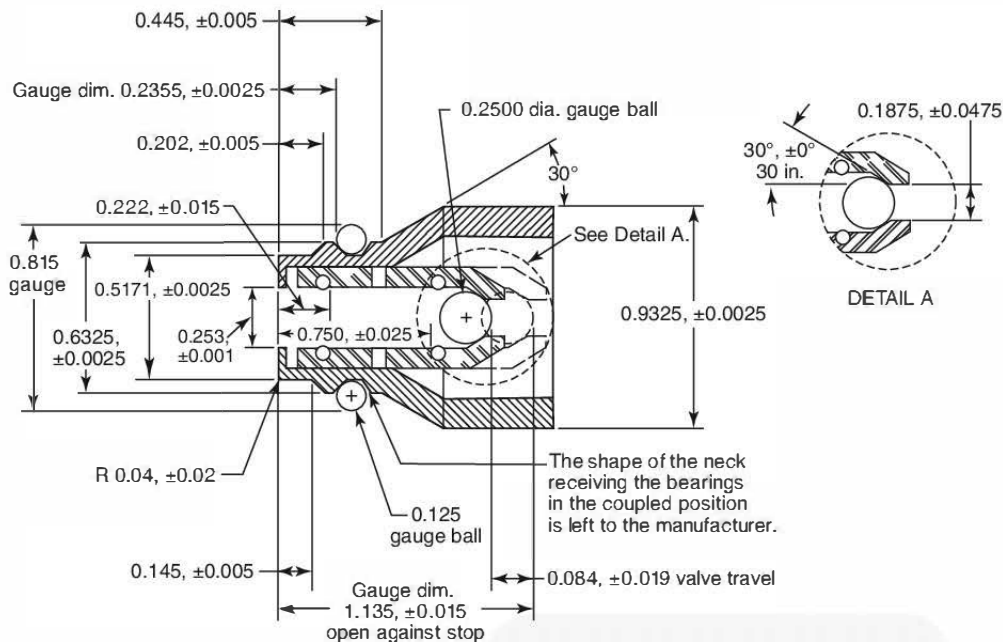


FIGURE 6.4.4.1 RIC UAC Male Fitting (all measurements in inches).

6.4.6 RIC UAC Filling Hose Assembly.

6.4.6.1 Each SCBA manufacturer shall make available an RIC UAC filling hose assembly that consists of a filling hose and an RIC UAC female fitting.

6.4.6.2 The RIC UAC filling hose assembly shall be, at a minimum, a high-pressure, 310 bar (4500 psi) assembly designed to replenish breathing air to an SCBA breathing air pressure vessel.

6.4.6.3 The filling hose shall have an RIC UAC female fitting that meets the requirements specified in 6.4.5 attached to the delivery end.

6.4.7 RIC UAC Coupling.

6.4.7.1 The complete RIC UAC male and female fittings shall constitute the RIC UAC coupling.

6.4.7.2 The RIC UAC coupling shall be capable of connection and disconnection with one hand while subjected to maximum operation pressure.

6.4.7.3 The RIC UAC coupling shall have an operating pressure of at least 310 bar (4500 psi).

6.5 Power Source Design Requirements.

6.5.1 Where the SCBA is equipped with a power source for electronics, it shall be either a single dedicated source for one device or a common power source for multiple devices.

6.5.2 Where all electronic devices that are part of the SCBA share a common power source, at least one low power source alert signal shall be provided.

6.5.3 Where multiple but not all electronic devices that are part of the SCBA share a common power source, a low power source alert signal shall be located on each of those electronic

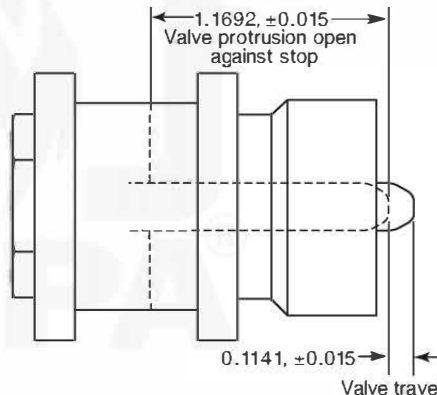


FIGURE 6.4.5.1 RIC UAC Female Fitting (all measurements in inches).

devices supplied by the common power source and positioned on each of those electronic devices where it will be detected upon device activation with the electronic device mounted in its permanent position on the SCBA.

6.5.4 Where an electronic device uses a single, dedicated power source, the low power source alert signal shall be located on the electronic device and positioned where it will be detected upon device activation with the electronic device mounted in its permanent position on the SCBA.

6.5.5 Where a HUD display of low power source alert signal(s) specified in 6.5.2 is visual, the low power source alert signal(s) shall be positioned within the user's field of vision with the SCBA facepiece properly donned.

6.5.6 Where a power source is used for HUD to comply with the requirements of this standard, HUD shall provide an alert signal for low power source capacity when the remaining power source life will provide a minimum of 2 hours of operation of the HUD at maximum electrical draw.

6.5.6.1 Where the low power source alert signal is visual, it shall be independent from and physically distinguishable from the breathing air pressure vessel content visual alert signal display.

6.5.6.2 When the HUD is in the active mode and uses a low power source visual alert signal, the low power source visual alert signal shall be displayed at all times when the power source condition is below the level specified in 6.3.8.4 except as provided in 6.5.6.3.

6.5.6.3 Where the HUD is capable of being user controlled, the low power source capacity visual display function shall be permitted to be disabled upon indication of a low power source condition.

6.6 Optional Emergency Breathing Safety System (EBSS) Design Requirements.

6.6.1 If an SCBA is equipped with an EBSS, it shall meet the performance requirements of Sections 7.17 and 8.23.

6.6.2 Each EBSS shall operate off the pressure after the first stage pressure reducer of the SCBA.

6.6.3 The EBSS shall have an operating pressure of at least 5.5 bar (80 psi).

6.6.4 The EBSS shall have a male and female connection with a check valve feature to prevent inward contaminants.

6.6.5 The EBSS pressure hose assembly shall be a minimum of 20 in. long.

6.6.6 The EBSS shall be accessible by the wearer.

6.6.7 The EBSS shall require only one action for connection of the donor's fitting to the receiving SCBA's fitting.

6.6.8 The EBSS shall require two distinctive actions to disconnect the fitting between the donor SCBA and the receiving SCBA.

6.6.9 The EBSS fitting(s) shall be equipped with a dust cap or sealing plug to prevent dust, dirt, and debris from entering the fitting(s).

6.6.10 The connection of two EBSS shall be independent of the facepieces.

6.7 Accessories Design Requirements.

6.7.1 Items attached to or integrated with SCBA that are not required for the SCBA to meet the requirements of this standard shall be considered accessories.

6.7.2 All accessories attached to or integrated with SCBA shall be certified by NIOSH in accordance with 42 CFR 84 for use with that specific SCBA.

6.7.3 Any accessories attached to SCBA shall not interfere with the function of the SCBA or with the function of any of the SCBA's component parts.

6.7.4 Where an SCBA is provided with an accessory or accessories that are attached to or integrated with the SCBA, the

SCBA, with accessories installed, shall meet all of the design and performance requirements of this standard.

6.7.5 In all cases, such accessories shall not degrade the performance of the SCBA.

Chapter 7 Performance Requirements

7.1* Airflow Performance.

7.1.1 SCBA shall be tested for airflow performance as specified in Section 8.1, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.1.2 SCBA shall be tested for activation of EOSTI during the airflow performance testing specified in Section 8.1, and the EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the airflow performance test.

7.1.3 Where the SCBA is equipped with a HUD, the SCBA shall be tested for proper functioning of the HUD breathing air pressure vessel content informational display and visual alert signals during the airflow performance testing specified in Section 8.1, and the HUD shall display the visual information for the breathing air pressure vessel content as specified in 6.3.9.5 and shall display the visual alert signal as specified in 6.3.8.

7.2 Environmental Temperature Performance.

7.2.1 SCBA shall be tested for environmental temperature performance as specified in Section 8.2.

7.2.1.1 SCBA shall be tested for cold environment as specified in 8.2.5.5, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.2.1.2 SCBA shall be tested for hot environment as specified in 8.2.5.6, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.2.1.3 SCBA shall be tested for hot-to-cold environment as specified in 8.2.5.7, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.2.1.4 SCBA shall be tested for cold-to-hot environment as specified in 8.2.5.8, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.2.2 SCBA shall be tested for activation of EOSTI during the environmental temperature performance as specified in Section 8.2.

7.2.2.1 SCBA shall be tested for cold environment as specified in 8.2.5.5, and the EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the airflow performance test.

7.2.2.2 SCBA shall be tested for hot environment as specified in 8.2.5.6, and the EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the airflow performance test.

7.2.2.3 SCBA shall be tested for hot-to-cold environment as specified in 8.2.5.7, and the EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the airflow performance test.

7.2.2.4 SCBA shall be tested for cold-to-hot environment as specified in 8.2.5.8, and the EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the airflow performance test.

7.2.3 Where the SCBA is equipped with a HUD, the SCBA shall be tested for the proper functioning of the HUD breathing air pressure vessel content informational display and the visual alert signal during the environmental temperature performance as specified in Section 8.2.

7.2.3.1 SCBA shall be tested for cold environment as specified in 8.2.5.5, and the HUD shall display the visual information for the breathing air pressure vessel content as specified in 6.3.9.5 and shall display the visual alert signal as specified in 6.3.8.

7.2.3.2 SCBA shall be tested for hot environment as specified in 8.2.5.6, and the HUD shall display the visual information for the breathing air pressure vessel content as specified in 6.3.9.5 and shall display the visual alert signal as specified in 6.3.8.

7.2.3.3 SCBA shall be tested for hot-to-cold environment as specified in 8.2.5.7, and the HUD shall display the visual information for the breathing air pressure vessel content as specified in 6.3.9.5 and shall display the visual alert signal as specified in 6.3.8.

7.2.3.4 SCBA shall be tested for cold-to-hot environment as specified in 8.2.5.8, and the HUD shall display the visual information for the breathing air pressure vessel content as specified in 6.3.9.5 and shall display the visual alert signals as specified in 6.3.8.

7.3 Vibration Resistance Performance.

7.3.1 SCBA shall be tested for vibration resistance as specified in Section 8.3, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded and shall not have movement of the CGA fittings causing a break of any width in the line.

7.3.2 SCBA shall be tested for activation of EOSTI during the vibration testing specified in Section 8.3, and the EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the airflow performance test.

7.3.3 Where the SCBA is equipped with a HUD, the SCBA shall be tested for proper functioning of the HUD breathing air pressure vessel content informational display and visual alert signals during the vibration testing specified in Section 8.3, and the HUD shall display the visual information for the breathing air pressure vessel content as specified in

6.3.9.5 and shall display the visual alert signal as specified in 6.3.8.

7.4 Corrosion Resistance Performance.

7.4.1 SCBA shall be tested for corrosion resistance as specified in Section 8.4, and any corrosion shall not prohibit the proper use and function, as specified in the manufacturer's instructions, of any control or operating feature of the SCBA.

7.4.2 SCBA shall be tested for corrosion resistance as specified in Section 8.4, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.4.3 SCBA shall be tested for activation of EOSTI during the corrosion resistance testing specified in Section 8.4, and the EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the airflow performance test.

7.4.4 Where the SCBA is equipped with a HUD, the SCBA shall be tested for proper functioning of the HUD breathing air pressure vessel content informational display and visual alert signals during the corrosion resistance testing specified in Section 8.4, and the HUD shall display the visual information for the breathing air pressure vessel content as specified in 6.3.9.5 and shall display the visual alert signal as specified in 6.3.8.

7.5 Particulate Resistance Performance.

7.5.1 SCBA shall be tested for particulate resistance as specified in Section 8.5, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.5.2 SCBA shall be tested for activation of EOSTI during the particulate resistance testing specified in Section 8.5, and the EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the airflow performance test.

7.5.3 Where the SCBA is equipped with a HUD, the SCBA shall be tested for proper functioning of the HUD breathing air pressure vessel content informational display and visual alert signals during the particulate resistance testing specified in Section 8.5, and the HUD shall display the visual information for the breathing air pressure vessel content as specified in 6.3.9.5 and shall display the visual alert signal as specified in 6.3.8.

7.6* Facepiece Lens Abrasion Resistance Performance. SCBA facepiece lenses shall be tested for abrasion resistance as specified in Section 8.6, and the average value of the tested specimens shall not exhibit a delta haze greater than 14 percent.

7.7 Nonelectronic Communications Performance Requirements. The SCBA voice communications system shall be tested for communications performance as specified in Section 8.7, and shall have a speech transmission index (STI) average value of not less than 0.55.

7.8 Flame Resistance Performance.

7.8.1 SCBA shall be tested for flame resistance as specified in Section 8.8, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.8.2 SCBA and SCBA accessories shall be tested for flame resistance as specified in Section 8.8, and no components of the SCBA and no accessories shall have an afterflame of more than 5 seconds.

7.8.3 SCBA shall be tested for flame resistance as specified in Section 8.8, and no component of the SCBA shall separate or fail in such a manner that would cause the SCBA to be worn and used in a position not specified by the manufacturer's instructions.

7.8.4 The SCBA facepiece shall be tested for flame resistance as specified in Section 8.8, and the facepiece lens shall not obscure vision below the 20/100 vision criterion.

7.8.5 SCBA shall be tested for activation of the EOSTI(s) during the flame resistance testing specified in Section 8.8, and the EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the airflow performance test.

7.8.6 Where the SCBA is equipped with a HUD, the SCBA shall be tested for functioning of the HUD breathing air pressure vessel content informational display and visual alert signals during the flame resistance testing specified in Section 8.8, and the HUD shall display the visual information for the breathing air pressure vessel content as specified in 6.3.9.5 and shall display the visual alert signal as specified in 6.3.8.

7.9 Carbon Dioxide (CO₂) Content Performance. SCBA facepieces shall be tested for CO₂ content as specified in Section 8.9, and the CO₂ content in the inhalation air shall not be greater than 1.0 percent by volume.

7.10 EOSTI Alarm Recognition. Each EOSTI shall be tested for alarm recognition as specified in Section 8.10, and the EOSTI alarm signal shall be recognized in 10 seconds or less.

7.11 Additional SCBA HUD Performance. Where the SCBA is equipped with a HUD, the tests in 7.11.1 through 7.11.4 shall apply.

7.11.1 Where a HUD incorporates exposed wiring, the wire's entry into any associated components shall be tested for connection strength as specified in Section 8.11, and the HUD shall remain functional.

7.11.2 Where a power source is used for a HUD to comply with the requirements of this standard, the HUD shall be tested for proper functioning of alert signals and visual information displays as specified in Section 8.12, and the HUD shall continue to function at maximum current draw for a minimum of 2 hours following the activation of the low power source alert signal and shall display the alert signals specified in 6.3.8 and shall display the visual information for the breathing air pressure vessel content as specified in 6.3.9.5.

7.11.3 The HUD shall be tested for wearer visibility as specified in Section 8.13, and each informational display and visual

alert signal shall be observable, distinct, and identifiable in both darkness and bright light.

7.11.4 The HUD shall be tested for disabling glare as specified in Section 8.15, and the test subject shall be able to read at least 9 out of 10 selected letters when each visual alert signal is activated.

7.12 RIC UAC Performance Requirements.

7.12.1 If an SCBA is equipped with an RIC UAC, SCBA shall be tested for breathing air pressure vessel refill breathing performance as specified in Section 8.16, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.12.2 If an SCBA is equipped with an RIC UAC, SCBA shall be tested for RIC UAC system fill rate performance as specified in Section 8.17, and the maximum allowable fill time shall be 3.0 minutes.

7.12.3 If an SCBA is equipped with an RIC UAC, the RIC UAC system connection shall be tested for accessibility as specified in Section 8.20, Breathing Air Pressure Vessel Connections and Accessibility Test, and the RIC UAC shall be connected in a maximum of 15 seconds and shall disconnect in a maximum of 15 seconds.

7.13 Breathing Air Pressure Vessel Performance Requirements. Where the SCBA is equipped with a rigid backframe/carrier, the SCBA and the breathing air pressure vessel retention device shall be tested for breathing air pressure vessel and valve assembly retention security as specified in Section 8.18, and the breathing air pressure vessel and valve assembly shall not change position by more than 25 mm (1 in.).

7.14 Supplementary Voice Communications System Performance Requirements. Where the SCBA is equipped with a supplementary voice communications system as identified by the SCBA manufacturer, it shall be tested for communication performance as specified in Section 8.21, and shall have a speech transmission index (STI) average value of not less than 0.60.

7.15 Immersion Leakage Performance Requirements. SCBA electronics shall be tested for resistance to water ingress as specified in Section 8.19, and the electronics shall function properly in accordance with the SCBA manufacturer's instructions for normal use, and all power source compartments or enclosures shall remain dry.

7.16 Low Power Capacity. Where power sources are used to comply with the requirements of this standard, electronic devices shall be tested for proper functioning during low power capacity as specified in Section 8.22. The low power alert signal shall activate within ±3 percent of the manufacturer stated value, and the power source shall continue to properly function at maximum power consumption for a minimum of 2 hours following the activation of the low power source alert signal.

7.17 Emergency Breathing Safety System Cold Temperature Performance Requirements.

7.17.1 Where the SCBA is equipped with an EBSS, the donor SCBA and the receiving SCBA shall be tested independently for airflow performance as specified in Section 8.23, and the SCBA

facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.17.2 Each SCBA shall be tested independently for activation of EOSTI during the airflow performance testing specified in Section 8.1, and EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the airflow performance test.

7.17.3 Where the SCBA is equipped with a HUD, the SCBA shall be tested independently for proper functioning of the HUD breathing air pressure vessel content informational display and HUD visual alert signals during the airflow performance testing specified in Section 8.1, and the HUD shall display the visual information for the breathing air pressure vessel content as specified in 6.3.9.5 and shall display the visual alert signal as specified in 6.3.8.

7.17.4 Both SCBA shall be connected through the EBSS and shall be tested for cold environment as specified in Section 8.23, and the SCBA facepiece pressure shall not be less than 0.0 mm (0.0 in.) water column and shall not be greater than 89 mm (3½ in.) water column above ambient pressure from the time the test begins until the time the test is concluded.

7.17.5 The donor SCBA shall be tested for activation of EOSTI during the environmental temperature performance as specified in Section 8.23, and the EOSTI shall activate as specified in 6.2.2 and shall continue to operate throughout the remainder of the test.

7.17.6 Where the SCBA is equipped with a HUD, the donor SCBA shall be tested for the proper functioning of the HUD breathing air pressure vessel content informational display and the visual alert signal during the environmental temperature performance as specified in Section 8.23.

7.18 Optional Toxic Industrial Chemical Permeation Resistance Performance Requirement.

7.18.1* Where this optional testing is elected by the manufacturer, SCBA shall be tested for resistance to permeation as specified in Section 8.24, and shall meet the performance criteria shown in Table 7.18.1 for both the nasal and ocular regions for 1 hour as contained in Table 7.18.1 for each of the 10 chemicals as selected by the manufacturer.

Table 7.18.1 SCBA Test Chemicals, Challenge States, and Pass/Fail Criteria

Chemical	CAS No.	Challenge State	Pass/Fail 60 min (ppm)
Acrylonitrile	107-13-1	Vapor	3
Ammonia	7664-41-7	Gas	3
Chlorine	7782-50-5	Gas	3
Methyl chloride	74-87-3	Gas	3
Diethylamine	109-89-7	Vapor	3
Ethyl acetate	141-78-6	Vapor	3
Tetrahydrofuran	109-99-9	Vapor	3
Tetrachloroethylene	127-18-4	Liquid	3
Dimethylformamide	68-12-2	Liquid	3
Toluene	108-88-3	Liquid	3

Chapter 8 Test Methods

8.1 Airflow Performance Test.

8.1.1 Application. This test method shall apply to complete SCBA.

8.1.2 Samples. Each sample shall be tested as specified in 4.3.9.

8.1.3 Specimen Preparation.

8.1.3.1 Specimens for conditioning shall be complete SCBA.

8.1.3.2 Prior to testing, specimens shall be conditioned for a minimum of 4 hours at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and relative humidity (RH) of 50 percent, ±25 percent.

8.1.3.3* The air used in the SCBA breathing air pressure vessels shall comply with the air quality requirements of NFPA 1989.

8.1.4 Apparatus.

8.1.4.1 A test headform as specified in Figure 8.1.4.1, or equivalent, shall be used.

8.1.4.2 A pressure probe shall be attached to the test headform to monitor facepiece pressure.

8.1.4.2.1 The pressure probe shall be a 6.5 mm (¼ in.) O.D. with a 1.5 mm (⅛ in.) wall thickness metal tube having one open end and one closed end.

8.1.4.2.2 The closed end of the pressure probe shall have four equally spaced holes, each 1.5 mm, ±0.1 mm (⅛ in., ±0.0 in.), and each hole shall be positioned 6.5 mm, ±0.4 mm (¼ in., ±0.0 in.) from the end of the pressure probe.

8.1.4.2.3 The closed end of the pressure probe shall extend through the test headform, exiting out the center of the left eye.

8.1.4.2.4 The pressure probe shall extend 13 mm, +1.5 mm/-0 mm (½ in., + ⅛ in./-0 in.) outward from the surface of the center of the left eye.

8.1.4.3 A length of tubing, including connections, of a 1.5 m (5 ft) length with a nominal 5 mm (⅜ in.) I.D. flexible smooth-bore tubing with a nominal 1.5 mm (⅛ in.) wall thickness shall be permitted to be connected to the open end of the pressure probe and to the inlet of the pressure transducer.

8.1.4.4 A differential pressure transducer having the following characteristics shall be used:

- (1) Range: 225 mm (8.9 in.) of water differential
- (2) Linearity: ±0.5 percent full scale (FS) best straight line
- (3) Line pressure effect: less than 1 percent FS zero shift/gauge pressure 1000 psi
- (4) Output: ±2.5 Vdc for +FS
- (5) Output ripple: 10 mV peak to peak
- (6) Regulation: FS output shall not change more than ±0.1 percent for input voltage change from 22 to 35 Vdc
- (7) Temperature, operating: -54°C to 121°C (-65°F to 250°F)
- (8) Temperature, compensated: -18°C to 71°C (0°F to 160°F)
- (9) Temperature effects: within 2 percent FS/55.6°C (100°F) error band

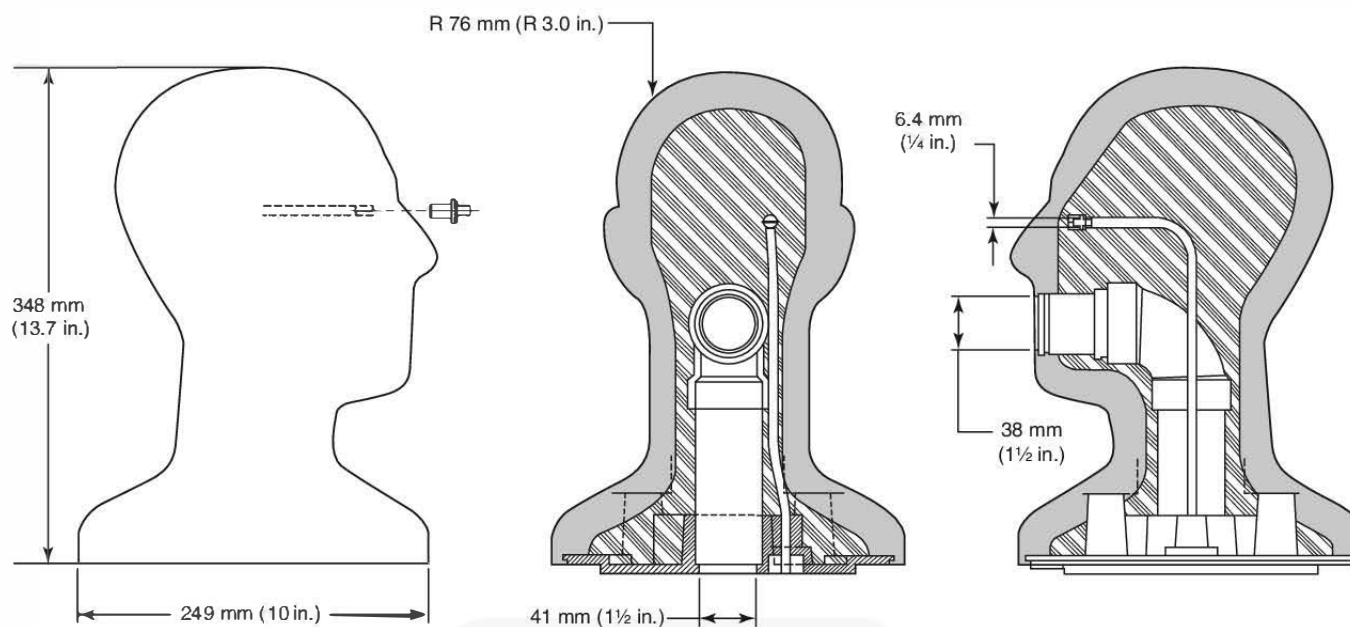


FIGURE 8.1.4.1 Test Headform.

8.1.4.5 The differential pressure transducer shall be connected to a strip chart recorder or equivalent electronic data acquisition system. If a strip chart recorder is utilized, it shall have the following characteristics:

- (1) Chart width of 250 mm
- (2) Pen speed of at least 750 mm/sec
- (3) Accuracy of ± 0.25 percent FS
- (4) Input voltage range of 1 V FS
- (5) Span set at 25 mm (1 in.) of chart per 25.4 mm (1 in.) water column

8.1.4.6 The test headform shall be equipped with a breathing passage.

8.1.4.6.1 The breathing passage shall lead from the mouth of the test head to the lung.

8.1.4.6.2 The sum of the volumes of the lung, when fully extended to a 3.4 L tidal volume position, and the breathing passage shall not exceed 4.0 L.

8.1.4.6.3 The breathing passage shall be located on the centerline of the mouth and shall be flush with the test headform.

8.1.4.7 The breathing passage shall extend a minimum of 200 mm (8 in.) and a maximum of 450 mm (18 in.).

8.1.4.8 Where flexible smooth-bore tubing is used from the metal breathing tube to the inlet connection of the breathing machine, it shall have a maximum length of 1.2 m (4 ft) and a 19 mm ($\frac{3}{4}$ in.) I.D. with a nominal 3 mm ($\frac{1}{8}$ in.) wall thickness.

8.1.4.8.1 When 8.2.5.5.3 of the environmental temperature test and 8.23.5.5 of the EBSS cold temperature performance test are performed, air exhaled through the headform shall be conditioned to an average temperature of 27°C, $\pm 6^\circ\text{C}$ (80°F, $\pm 10^\circ\text{F}$) when measured at the breathing passage outlet at the mouth of the test headform (see Figure 8.1.4.8.1).

8.1.4.9 The breathing machine shown in Figure 8.1.4.9 or equivalent shall be used.

8.1.4.9.1 The breathing machine shall consist of a flexible bellows material attached at one end to a fixed plate and at the other end to a free plate constrained to two degrees of freedom.

8.1.4.9.2 The free plate shall be connected to a rotating shaft by means of a connecting rod, vibration damper, and bellows crank mechanism.

8.1.4.9.3 The bellows crank mechanism shall have a center-to-center distance of 57 mm, ± 0.005 mm ($2\frac{1}{4}$ in., ± 0.01 in.).

8.1.4.9.4 The connecting rod shall have a center-to-center free plate distance of 133 mm, ± 0.005 mm ($5\frac{1}{4}$ in., ± 0.01 in.).

8.1.4.9.5 The vibration damper shall be a rubber-to-metal bonded antivibration mounting with a mounting flange hole spacing of 50 mm, ± 5 mm (2 in., $\pm \frac{3}{16}$ in.) and an overall height of 20 mm, ± 2 mm ($\frac{3}{16}$ in., $\pm \frac{5}{64}$ in.) and have a static force/displacement curve with a slope of 11.5 N/mm, ± 0.5 N/mm.

8.1.4.10 The bellows material shall consist of neoprene-impregnated nylon fabric convoluted tubing.

8.1.4.10.1 The tubing shall have an I.D. of 200 mm, ± 5 mm (8 in., $\pm \frac{3}{16}$ in.) and an O.D. of 250 mm, ± 5 mm (10 in., $\pm \frac{3}{16}$ in.).

8.1.4.10.2 The nominal wall thickness of the tubing shall be 1.4 mm ($\frac{1}{32}$ in.).

8.1.4.10.3 The breathing machine shall have the capability to conduct breathing resistance testing at 40 L/min, ± 1.0 L/min and 103 L/min, ± 3.0 L/min.

8.1.4.10.4 The tidal volume of the lung shall determine the volume of air moved during each inhalation/exhalation cycle.

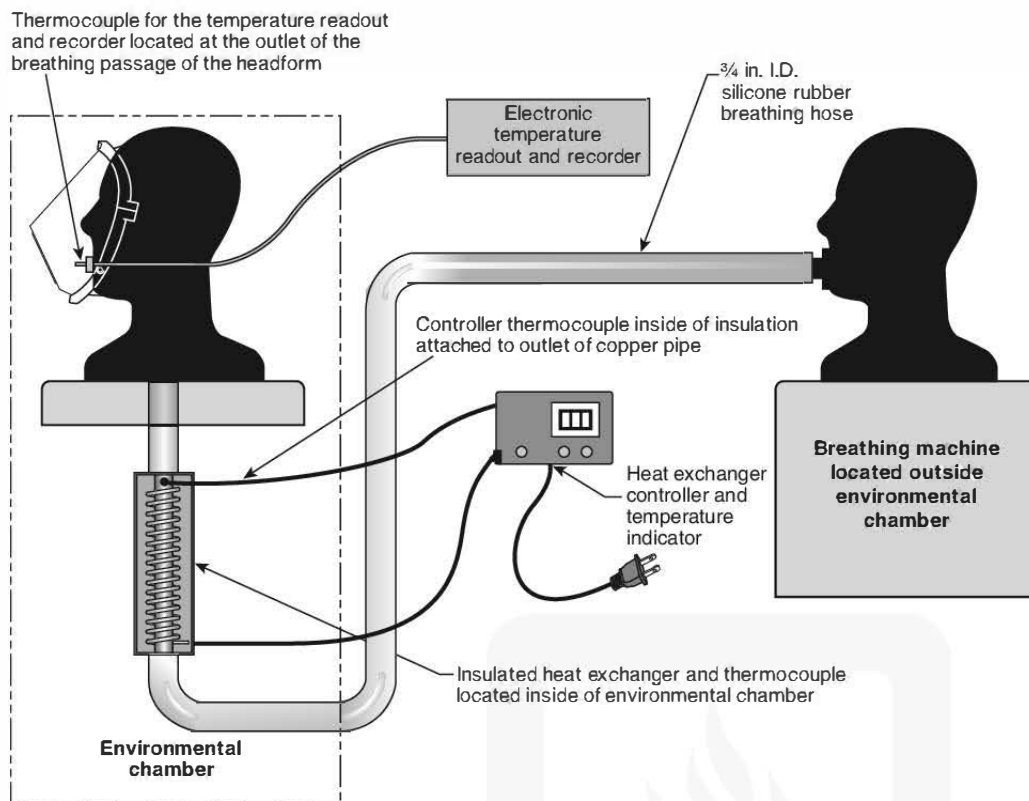


FIGURE 8.1.4.8.1 Cold Temperature Performance Test.

8.1.4.10.5 The airflow shall be determined by three factors:

- (1) Number of inhalation/exhalation cycles per minute
- (2) Tidal volume of the lung
- (3) Breathing waveform

8.1.4.10.6 The breathing waveform shall be produced by reciprocal action of the shaft.

8.1.4.10.7 Inspired and expired volumes as a function of time shall be incorporated in accordance with the values given in Table 8.1.4.10.7(a) and Table 8.1.4.10.7(b), which list the linear displacement of the bellows free plate as a function of time for 103 L/min volume and 40 L/min volume work rates.

8.1.4.10.8 Switching between the two work rates shall be performed within 10 seconds.

8.1.4.10.9 The construction of the breathing machine shall be such that the respiration rate, tidal volume, peak flow, and facepiece pressure measurement system accuracy are unaffected by temperature changes caused by the environmental airflow performance tests as specified in Section 8.2.

8.1.5 Procedure.

8.1.5.1* The test setup for conducting the airflow performance test shall be calibrated at least once each day before tests are conducted and shall be verified at least once each day after testing.

8.1.5.1.1 The calibration procedure utilized for the differential pressure transducer shall consist of confirmation of at least three different pressures between 0 mm and 125 mm (0 in. and 5 in.) water column.

8.1.5.1.2 The pressure shall be measured using an incline manometer or equivalent with a scale measuring in increments of ± 0.5 mm (± 0.02 in.) water column or less.

8.1.5.2 The SCBA being tested shall utilize a fully charged breathing air pressure vessel.

8.1.5.3 The facepiece of the SCBA being tested shall be secured to the test headform. The facepiece seal to the headform shall ensure that an initial pressure of 25 mm, ± 2.5 mm (1 in., ± 0.1 in.) water column below ambient shall not decay by more than 5 mm (0.2 in.) water column in 5 seconds.

8.1.5.4 The remaining components of the SCBA shall be mounted to simulate the proper wearing position as specified by the manufacturer's instructions.

8.1.5.5 SCBA shall be tested at an ambient temperature of 22°C , $\pm 3^{\circ}\text{C}$ (72°F , $\pm 5^{\circ}\text{F}$) and RH of 50 percent, ± 25 percent.

8.1.5.6 The airflow performance test shall begin after five cycles of the breathing machine and shall continue to operate through at least 20 bar (290 psi) of breathing air pressure vessel inlet pressure.

8.1.5.7 The breathing machine shall be set at a rate of 103 L/min, ± 3 L/min with a respiratory frequency of 30 breaths/min, ± 1 breath/min.

8.1.6 Report.

8.1.6.1 The facepiece peak inhalation pressure and peak exhalation pressure shall be recorded and reported for each test.

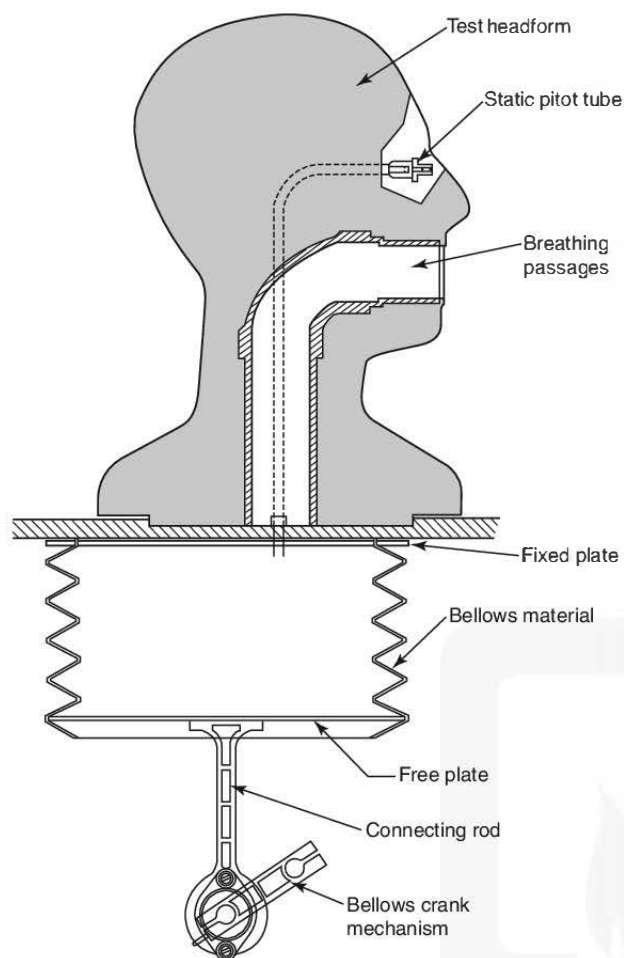


FIGURE 8.1.4.9 Breathing Machine.

8.1.6.2 The activation and operation of the EOSTI or the failure of the EOSTI to activate and operate shall be recorded and reported.

8.1.6.3 Where the SCBA is equipped with a HUD, the activation and identification of HUD visual alert signals shall be recorded and reported.

8.1.7 Interpretation.

8.1.7.1 The peak inhalation pressure and peak exhalation pressure shall be used to determine pass or fail performance.

8.1.7.2 One or more specimens failing this test shall constitute failing performance.

8.1.7.3 Failure of any EOSTI alarm signal to activate and remain active during the test shall constitute failing performance.

8.1.7.4 Where the SCBA is equipped with a HUD, failure of the HUD to display the breathing air pressure vessel content or to display the visual alert signal during the test shall constitute failing performance.

Table 8.1.4.10.7(a) Lung Breathing Waveforms for 103 L/min Volume Work Rate

Step No.	Time (sec)	Inspire/Expire	Volume (L, ± 0.1 L)	Volume Change (L, $\pm 5\%$)
0	0.00	—	-1.7	-0.012
1	0.02	Inspire	-1.688	0.012
2	0.04	Inspire	-1.662	0.025
3	0.06	Inspire	-1.626	0.036
4	0.08	Inspire	-1.581	0.045
5	0.10	Inspire	-1.529	0.052
6	0.12	Inspire	-1.471	0.058
7	0.14	Inspire	-1.409	0.062
8	0.16	Inspire	-1.345	0.064
9	0.18	Inspire	-1.277	0.068
10	0.20	Inspire	-1.207	0.07
11	0.22	Inspire	-1.134	0.073
12	0.24	Inspire	-1.059	0.075
13	0.26	Inspire	-0.984	0.076
14	0.28	Inspire	-0.906	0.077
15	0.30	Inspire	-0.828	0.079
16	0.32	Inspire	-0.748	0.08
17	0.34	Inspire	-0.667	0.081
18	0.36	Inspire	-0.586	0.081
19	0.38	Inspire	-0.504	0.082
20	0.40	Inspire	-0.421	0.083
21	0.42	Inspire	-0.337	0.084
22	0.44	Inspire	-0.254	0.084
23	0.46	Inspire	-0.169	0.085
24	0.48	Inspire	-0.085	0.085
25	0.50	Inspire	0	0.085
26	0.52	Inspire	0.085	0.085
27	0.54	Inspire	0.169	0.085
28	0.56	Inspire	0.254	0.085
29	0.58	Inspire	0.337	0.084
30	0.60	Inspire	0.421	0.084
31	0.62	Inspire	0.504	0.083
32	0.64	Inspire	0.586	0.082
33	0.66	Inspire	0.667	0.081
34	0.68	Inspire	0.748	0.081
35	0.70	Inspire	0.828	0.08
36	0.72	Inspire	0.906	0.079
37	0.74	Inspire	0.984	0.077
38	0.76	Inspire	1.059	0.076
39	0.78	Inspire	1.134	0.075
40	0.80	Inspire	1.207	0.073
41	0.82	Inspire	1.277	0.07
42	0.84	Inspire	1.345	0.068
43	0.86	Inspire	1.409	0.064
44	0.88	Inspire	1.471	0.062
45	0.90	Inspire	1.529	0.058
46	0.92	Inspire	1.581	0.052
47	0.94	Inspire	1.626	0.045
48	0.96	Inspire	1.662	0.036
49	0.98	Inspire	1.688	0.025
50	1.00	—	1.7	0.012
51	1.02	Expire	1.688	-0.012
52	1.04	Expire	1.662	-0.025
53	1.06	Expire	1.626	-0.036
54	1.08	Expire	1.581	-0.045
55	1.10	Expire	1.529	-0.052

(continues)

Table 8.1.4.10.7(a) *Continued*

Step No.	Time (sec)	Inspire/Expire	Volume (L, ± 0.1 L)	Volume Change (L, $\pm 5\%$)
56	1.12	Expire	1.471	-0.058
57	1.14	Expire	1.409	-0.062
58	1.16	Expire	1.345	-0.064
59	1.18	Expire	1.277	-0.068
60	1.20	Expire	1.207	-0.07
61	1.22	Expire	1.134	-0.073
62	1.24	Expire	1.059	-0.075
63	1.26	Expire	0.984	-0.076
64	1.28	Expire	0.906	-0.077
65	1.30	Expire	0.828	-0.079
66	1.32	Expire	0.748	-0.08
67	1.34	Expire	0.667	-0.081
68	1.36	Expire	0.586	-0.081
69	1.38	Expire	0.504	-0.082
70	1.40	Expire	0.421	-0.083
71	1.42	Expire	0.337	-0.084
72	1.44	Expire	0.254	-0.084
73	1.46	Expire	0.169	-0.085
74	1.48	Expire	0.085	-0.085
75	1.50	Expire	0	-0.085
76	1.52	Expire	-0.085	-0.085
77	1.54	Expire	-0.169	-0.085
78	1.56	Expire	-0.254	-0.085
79	1.58	Expire	-0.337	-0.084
80	1.60	Expire	-0.421	-0.084
81	1.62	Expire	-0.504	-0.083
82	1.64	Expire	-0.586	-0.082
83	1.66	Expire	-0.667	-0.081
84	1.68	Expire	-0.748	-0.081
85	1.70	Expire	-0.828	-0.08
86	1.72	Expire	-0.906	-0.079
87	1.74	Expire	-0.984	-0.077
88	1.76	Expire	-1.059	-0.076
89	1.78	Expire	-1.134	-0.075
90	1.80	Expire	-1.207	-0.073
91	1.82	Expire	-1.277	-0.07
92	1.84	Expire	-1.345	-0.068
93	1.86	Expire	-1.409	-0.064
94	1.88	Expire	-1.471	-0.062
95	1.90	Expire	-1.529	-0.058
96	1.92	Expire	-1.581	-0.052
97	1.94	Expire	-1.626	-0.045
98	1.96	Expire	-1.662	-0.036
99	1.98	Expire	-1.688	-0.025

Table 8.1.4.10.7(b) Lung Breathing Waveforms for 40 L/min Volume Work Rate

Step No.	Time (sec)	Inspire/Expire	Volume (L, ± 0.1 L)	Volume Change (L, $\pm 5\%$)
0	0	—	-0.833	0.001
1	0.025	Inspire	-0.831	0.002
2	0.050	Inspire	-0.825	0.005
3	0.075	Inspire	-0.816	0.009
4	0.100	Inspire	-0.803	0.013
5	0.125	Inspire	-0.787	0.016
6	0.150	Inspire	-0.768	0.019
7	0.175	Inspire	-0.745	0.022
8	0.200	Inspire	-0.720	0.025
9	0.225	Inspire	-0.692	0.028
10	0.250	Inspire	-0.661	0.031
11	0.275	Inspire	-0.628	0.033
12	0.300	Inspire	-0.592	0.035
13	0.325	Inspire	-0.555	0.038
14	0.350	Inspire	-0.515	0.039
15	0.375	Inspire	-0.474	0.041
16	0.400	Inspire	-0.431	0.043
17	0.425	Inspire	-0.387	0.044
18	0.450	Inspire	-0.341	0.046
19	0.475	Inspire	-0.295	0.047
20	0.500	Inspire	-0.247	0.048
21	0.525	Inspire	-0.198	0.049
22	0.550	Inspire	-0.149	0.049
23	0.575	Inspire	-0.100	0.050
24	0.600	Inspire	-0.050	0.050
25	0.625	Inspire	0.000	0.050
26	0.650	Inspire	0.051	0.050
27	0.675	Inspire	0.100	0.050
28	0.700	Inspire	0.150	0.050
29	0.725	Inspire	0.199	0.049
30	0.750	Inspire	0.248	0.048
31	0.775	Inspire	0.295	0.048
32	0.800	Inspire	0.342	0.047
33	0.825	Inspire	0.388	0.046
34	0.850	Inspire	0.432	0.044
35	0.875	Inspire	0.475	0.043
36	0.900	Inspire	0.516	0.041
37	0.925	Inspire	0.555	0.039
38	0.950	Inspire	0.592	0.037
39	0.975	Inspire	0.628	0.035
40	1.000	Inspire	0.661	0.033
41	1.025	Inspire	0.691	0.031
42	1.050	Inspire	0.719	0.028
43	1.075	Inspire	0.744	0.025
44	1.100	Inspire	0.767	0.022
45	1.125	Inspire	0.786	0.019
46	1.150	Inspire	0.802	0.016
47	1.175	Inspire	0.814	0.013
48	1.200	Inspire	0.823	0.009
49	1.225	Inspire	0.829	0.005
50	1.250	—	0.833	0.004
51	1.275	Expire	0.831	-0.002
52	1.300	Expire	0.825	-0.005
53	1.325	Expire	0.816	-0.009
54	1.350	Expire	0.803	-0.013
55	1.375	Expire	0.787	-0.016

(continues)

8.2 Environmental Temperature Tests.

8.2.1 Application. This test method shall apply to complete SCBA.

8.2.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.2.3 Specimen Preparation.

8.2.3.1 Specimens for conditioning shall be complete SCBA.

8.2.3.2 Prior to testing, the SCBA shall be placed in an ambient environment of 22°C, $\pm 3^\circ\text{C}$ (72°F, $\pm 5^\circ\text{F}$) and RH of 50 percent, ± 25 percent for a minimum 12-hour dwell period.

Table 8.1.4.10.7(b) *Continued*

Step No.	Time (sec)	Inspire/Expire	Volume (L, ± 0.1 L)	Volume Change (L, $\pm 5\%$)
56	1.400	Expire	0.768	-0.019
57	1.425	Expire	0.745	-0.022
58	1.450	Expire	0.720	-0.025
59	1.475	Expire	0.692	-0.028
60	1.500	Expire	0.661	-0.031
61	1.525	Expire	0.628	-0.033
62	1.550	Expire	0.592	-0.035
63	1.575	Expire	0.555	-0.038
64	1.600	Expire	0.515	-0.039
65	1.625	Expire	0.474	-0.041
66	1.650	Expire	0.431	-0.043
67	1.675	Expire	0.387	-0.044
68	1.700	Expire	0.341	-0.046
69	1.725	Expire	0.295	-0.047
70	1.750	Expire	0.247	-0.048
71	1.775	Expire	0.198	-0.049
72	1.800	Expire	0.149	-0.049
73	1.825	Expire	0.100	-0.050
74	1.850	Expire	0.050	-0.050
75	1.875	Expire	0.000	-0.050
76	1.900	Expire	-0.051	-0.050
77	1.925	Expire	-0.100	-0.050
78	1.950	Expire	-0.150	-0.050
79	1.975	Expire	-0.199	-0.049
80	2.000	Expire	-0.248	-0.048
81	2.025	Expire	-0.295	-0.048
82	2.050	Expire	-0.342	-0.047
83	2.075	Expire	-0.388	-0.046
84	2.100	Expire	-0.432	-0.044
85	2.125	Expire	-0.475	-0.043
86	2.150	Expire	-0.516	-0.041
87	2.175	Expire	-0.555	-0.039
88	2.200	Expire	-0.592	-0.037
89	2.225	Expire	-0.628	-0.035
90	2.250	Expire	-0.661	-0.033
91	2.275	Expire	-0.691	-0.031
92	2.300	Expire	-0.719	-0.028
93	2.325	Expire	-0.744	-0.025
94	2.350	Expire	-0.767	-0.022
95	2.375	Expire	-0.786	-0.019
96	2.400	Expire	-0.802	-0.016
97	2.425	Expire	-0.814	-0.013
98	2.450	Expire	-0.823	-0.009
99	2.475	Expire	-0.829	-0.005

8.2.4 Apparatus.

8.2.4.1 The SCBA shall be placed in an environmental chamber and positioned to simulate the normal wearing position of the SCBA on a person as specified by the manufacturer.

8.2.4.2 During the environmental exposures in 8.2.5.5, 8.2.5.6, 8.2.5.7, and 8.2.5.8, the SCBA facepiece shall be mounted on a Scott Aviation Model No. 803608-01 or 803608-02 test headform or equivalent.

8.2.4.3 The thermocouple or other temperature-sensing element used shall be mounted within the chamber in a manner in which it will be exposed directly to the chamber atmosphere.

8.2.4.4 The test headform shall be connected to the breathing machine specified in Section 8.1.

8.2.4.5 The breathing machine shall be permitted to be located either inside or outside the environmental chamber.

8.2.5 Procedure.

8.2.5.1 The variation in pressure extremes caused by the environmental test configuration shall be determined as follows:

- (1) The airflow performance test as specified in Section 8.1 shall be carried out using the configuration specified in 8.2.4 at the 103 L/min, ± 3 L/min ventilation rate.
- (2) The difference in pressure between the two tests shall be calculated by subtracting the values obtained using the configuration defined in 8.2.4 from the values obtained using the configuration specified in Section 8.1.

8.2.5.2 The facepiece pressure during each entire test shall be read from the strip chart recorder and corrected by adding the value of the difference in pressure calculated in 8.2.5.1 to determine pass or fail as specified in 7.2.1.1 through 7.2.1.4.

8.2.5.3 These environmental temperature tests shall be permitted to be conducted in any sequence.

8.2.5.4 The dwell period between environmental temperature tests shall be used to refill the breathing air pressure vessel and to visually inspect the SCBA for any gross damage that could cause unsafe test conditions.

8.2.5.5 Test 1.

8.2.5.5.1 The SCBA shall be cold soaked at the minimum operating temperature specified by the manufacturer for a minimum of 12 hours.

8.2.5.5.2 The minimum operating temperature specified by the manufacturer shall be -18°C (0°F) or colder.

8.2.5.5.3 The SCBA shall then be tested for airflow performance as specified in Section 8.1, with the chamber air temperature at the minimum operating temperature specified by the manufacturer.

8.2.5.6 Test 2.

8.2.5.6.1 The SCBA shall be hot soaked at 71°C , $\pm 1^{\circ}\text{C}$ (160°F , $\pm 2^{\circ}\text{F}$) for a minimum of 12 hours.

8.2.5.6.2 The SCBA shall then be tested for airflow performance as specified in Section 8.1 at a chamber air temperature of 71°C , $\pm 5^{\circ}\text{C}$ (160°F , $\pm 10^{\circ}\text{F}$).

8.2.5.7 Test 3.

8.2.5.7.1 The SCBA shall be hot soaked at 71°C , $\pm 1^{\circ}\text{C}$ (160°F , $\pm 2^{\circ}\text{F}$) for a minimum of 12 hours.

8.2.5.7.2 Immediately following the 12-hour hot soak, the SCBA shall be transferred to a chamber with the air temperature at the minimum operating temperature specified by the manufacturer.

8.2.5.7.3 The minimum operating temperature specified by the manufacturer shall be -18°C (0°F) or colder.

8.2.5.7.4 The SCBA shall then be tested for airflow performance as specified in Section 8.1, with the chamber air temperature at the minimum operating temperature specified by the manufacturer $+ 0 - 5^{\circ}\text{C}$ ($+ 0 - 10^{\circ}\text{F}$).

8.2.5.7.5 The airflow performance test shall commence within 3 minutes after removal of the SCBA from the hot soak.

8.2.5.8 Test 4.

8.2.5.8.1 The SCBA shall be cold soaked at the minimum operating temperature specified by the manufacturer for a minimum of 12 hours.

8.2.5.8.2 The minimum operating temperature specified by the manufacturer shall be -18°C (0°F) or colder.

8.2.5.8.3 Immediately following the 12-hour cold soak, the SCBA shall be transferred to a chamber with an air temperature of 71°C , $\pm 1^{\circ}\text{C}$ (160°F , $\pm 2^{\circ}\text{F}$).

8.2.5.8.4 The SCBA shall then be tested for airflow performance as specified in Section 8.1 at a chamber air temperature of 71°C , $\pm 5^{\circ}\text{C}$ (160°F , $\pm 10^{\circ}\text{F}$).

8.2.5.8.5 The airflow performance test shall commence within 3 minutes after removal of the SCBA from the cold soak.

8.2.6 Report.

8.2.6.1 The facepiece peak inhalation pressure and peak exhalation pressure shall be recorded and reported for each test condition.

8.2.6.2 The activation and operation of the EOSTI or the failure of the EOSTI to activate and operate shall be recorded and reported.

8.2.6.3 Where the SCBA is equipped with a HUD, the activation and identification of HUD visual alert signals shall be recorded and reported.

8.2.7 Interpretation.

8.2.7.1 The peak inhalation and peak exhalation shall be used to determine pass or fail performance for each test procedure.

8.2.7.2 One or more specimens failing any test procedure shall constitute failing performance.

8.2.7.3 Failure of any EOSTI alarm signal to activate and remain active during the test shall constitute failing performance.

8.2.7.4 Where the SCBA is equipped with a HUD, failure of the HUD to display the breathing air pressure vessel content or to display the visual alert signal during the test shall constitute failing performance.

8.3 Vibration Test.

8.3.1 Application. This test method shall apply to complete SCBA.

8.3.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.3.3 Specimen Preparation.

8.3.3.1 Specimens for conditioning shall be complete SCBA.

8.3.3.2 Prior to testing, specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C , $\pm 3^{\circ}\text{C}$ (72°F , $\pm 5^{\circ}\text{F}$) and RH of 50 percent, ± 25 percent.

8.3.4 Apparatus.

8.3.4.1 SCBA shall be tested on a typical package tester within the compartments specified in 8.3.4.2 through 8.3.4.4.

8.3.4.2 Compartments shall be set up as specified in Figure 8.3.4.2(a) and Figure 8.3.4.2(b).

8.3.4.2.1 The sides and base of the compartments shall be constructed of nominal 6 mm ($\frac{1}{4}$ in.) stainless steel, and the top of the compartments shall remain open.

8.3.4.2.2 There shall be no burrs, sharp edges, surface discontinuities, or fasteners on the internal surfaces of the holding boxes.

8.3.4.2.3 If the SCBA does not fit the compartment as specified in Figure 8.3.4.2(a) and Figure 8.3.4.2(b), the compartment shall be designed to accommodate the size and shape of the SCBA, allowing a clearance of 150 mm, ± 150 mm (6 in., ± 6 in.) between the top to bottom length and the width of the SCBA.

8.3.4.3 The large compartments shall encase the complete SCBA.

8.3.4.3.1 SCBA regulators and hose shall remain attached to the complete SCBA.

8.3.4.3.2 Regulators shall be allowed to be placed in the regulator holder of the SCBA.

8.3.4.3.3 The SCBA facepiece and those components that attach directly to the facepiece, excluding regulators, shall not be included in the SCBA compartment.

370 mm, ± 6 mm $\times$ 370 mm, ± 6 mm (14 $\frac{3}{4}$ in., $\pm \frac{1}{4}$ in.) $\times$ 14 $\frac{3}{4}$ in., $\pm \frac{1}{4}$ in.)	370mm, ± 6 mm $\times$ 370 mm, ± 6 mm (14 $\frac{3}{4}$ in., $\pm \frac{1}{4}$ in.) $\times$ 14 $\frac{3}{4}$ in., $\pm \frac{1}{4}$ in.)	735 mm, ± 13 mm $\times$ 735 mm, ± 13 mm (29 in., $\pm \frac{1}{2}$ in.) $\times$ 29 in., $\pm \frac{1}{2}$ in.)
370 mm, ± 6 mm $\times$ 370 mm, ± 6 mm (14 $\frac{3}{4}$ in., $\pm \frac{1}{4}$ in.) $\times$ 14 $\frac{3}{4}$ in., $\pm \frac{1}{4}$ in.)	370mm, ± 6 mm $\times$ 370 mm, ± 6 mm (14 $\frac{3}{4}$ in., $\pm \frac{1}{4}$ in.) $\times$ 14 $\frac{3}{4}$ in., $\pm \frac{1}{4}$ in.)	
735 mm, ± 13 mm $\times$ 735 mm, ± 13 mm (29 in., $\pm \frac{1}{2}$ in.) $\times$ 29 in., $\pm \frac{1}{2}$ in.)		735 mm, ± 13 mm $\times$ 735 mm, ± 13 mm (29 in., $\pm \frac{1}{2}$ in.) $\times$ 29 in., $\pm \frac{1}{2}$ in.)

FIGURE 8.3.4.2(a) Vibration Table Compartments — Top View (Not to Scale).

370mm, ± 6 mm $\times$ 610 mm, ± 13 mm (14 $\frac{3}{4}$ in., $\pm \frac{1}{4}$ in.) $\times$ 24 in., $\pm \frac{1}{2}$ in.)	370 mm, ± 6 mm $\times$ 610 mm, ± 13 mm (14 $\frac{3}{4}$ in., $\pm \frac{1}{4}$ in.) $\times$ 24 in., $\pm \frac{1}{2}$ in.)	735 mm, ± 13 mm $\times$ 610 mm, ± 13 mm (29 in., $\pm \frac{1}{2}$ in.) $\times$ 24 in., $\pm \frac{1}{2}$ in.)
Vibration table surface		

FIGURE 8.3.4.2(b) Vibration Table Compartments — Side View (Not to Scale).

8.3.4.4 The small compartments shall encase the facepiece and those components that attach directly to the facepiece, excluding the regulator and associated hose.

8.3.4.5* The breathing air pressure vessel of the SCBA shall be replaced by a surrogate breathing air pressure vessel.

8.3.4.6 The surrogate breathing air pressure vessel and breathing air pressure vessel valve shall be of identical design and construction as the breathing air pressure vessel and breathing air pressure vessel valve of the SCBA to be tested.

8.3.4.7 The mass of the breathing air of a fully pressurized breathing air pressure vessel shall be replaced in the surrogate breathing air pressure vessel with a substitute mass. The substitute mass shall consist of a brass rod and surrounding foam constructed as shown in Figure 8.3.4.7.

8.3.4.8 The surrogate breathing air pressure vessel and breathing air pressure vessel valve with the substitute mass shall have the same total mass ± 5 percent as the fully pressurized breathing air pressure vessel and breathing air pressure vessel valve.

8.3.4.9 The attachment of the breathing air pressure vessel valve shall be tightened to a torque setting of 5 N·m, $+0.5/-0.05$ N·m (45 in. lb, $+5/-0$ in. lb) prior to the test. An opposing line no wider than 3 mm ($\frac{1}{8}$ in.) shall be placed on both the male and the female CGA fitting prior to the start of the test, to identify the relationship between the male and the female CGA fittings when tightened at the proper torque setting.

8.3.5 Procedure.

8.3.5.1 The test items shall be placed unrestrained in the compartments specified in 8.3.4.2, and all SCBA adjustment straps shall be fully extended.

8.3.5.2 No tie-downs shall be allowed to be made to the SCBA.

8.3.5.3 The basic movement of the bed of the test table shall be a 25 mm (1 in.) orbital path, such as can be obtained on a standard package tester operating in synchronous mode at 250 rpm, ± 5 rpm.

8.3.5.4 The test duration shall be 3 hours.

8.3.5.5 After being subjected to the vibration test, the male and female CGA fittings shall be observed for movement.

8.3.5.6 After being subjected to the vibration test, the SCBA shall be reattached to the breathing air pressure vessel originally provided with the SCBA and shall then be tested as specified in Section 8.1.

8.3.6 Report.

8.3.6.1 The observation of movement or no movement of the male and female CGA fittings shall be recorded and reported.

8.3.6.2 The facepiece peak inhalation pressure and peak exhalation pressure shall be recorded and reported for each test condition.

8.3.6.3 The activation and operation of the EOSTI or the failure of the EOSTI to activate and operate shall be recorded and reported.

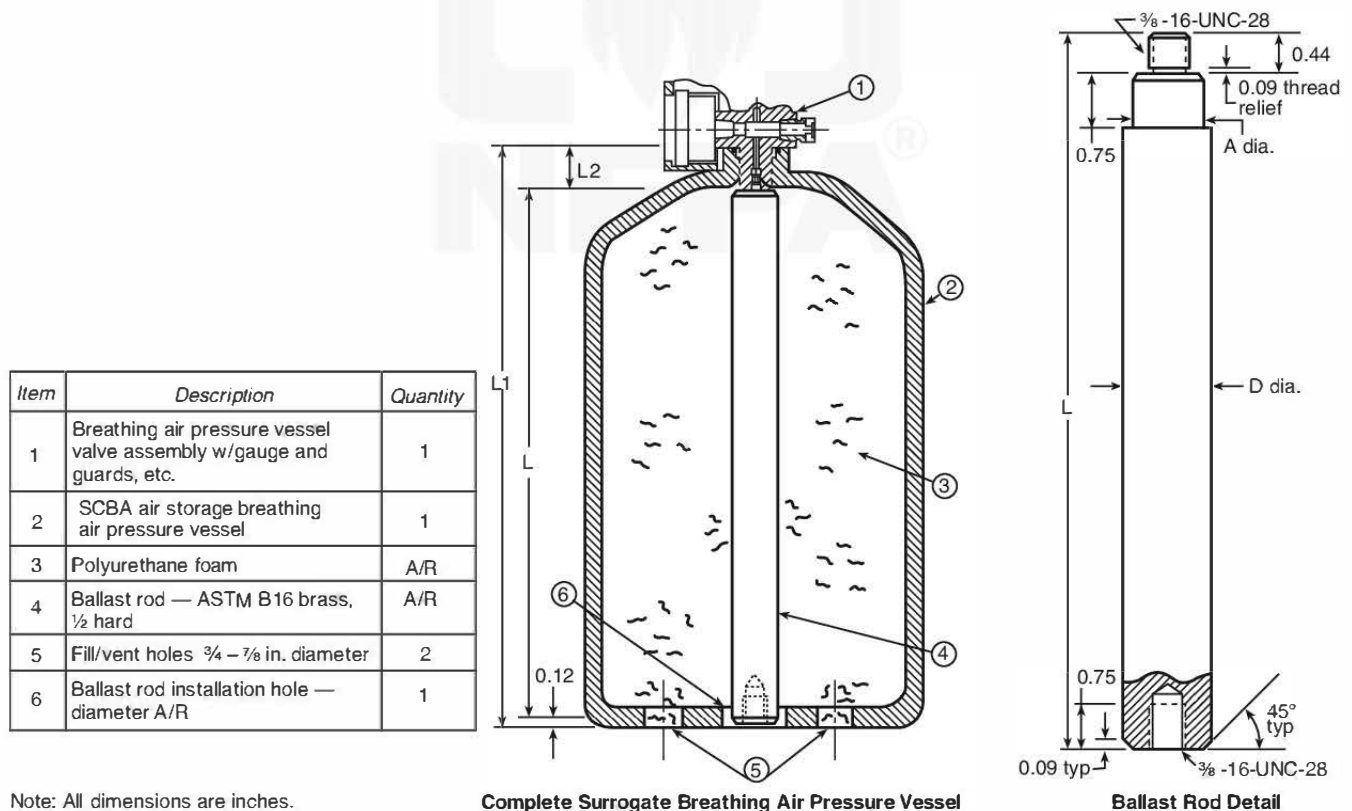


FIGURE 8.3.4.7 Surrogate Breathing Air Pressure Vessel.

8.3.6.4 Where the SCBA is equipped with a HUD, the activation and identification of HUD visual alert signals shall be recorded and reported.

8.3.7 Interpretation.

8.3.7.1 The movement of either the male or the female CGA fitting causing a break in the line of any width shall constitute a failure.

8.3.7.2 The peak inhalation and peak exhalation shall be used to determine pass or fail performance for each test procedure.

8.3.7.3 One or more specimens failing this test shall constitute failing performance.

8.3.7.4 Failure of any EOSTI alarm signal to activate and remain active during the test shall constitute failing performance.

8.3.7.5 Where the SCBA is equipped with a HUD, failure of the HUD to display the breathing air pressure vessel content or to display the visual alert signal during the test shall constitute failing performance.

8.4 Accelerated Corrosion Test.

8.4.1 Application. This test method shall apply to complete SCBA.

8.4.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.4.3 Specimen Preparation.

8.4.3.1 Prior to testing, specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.4.3.2 Specimens for conditioning shall be complete SCBA.

8.4.4 Apparatus. A salt fog chamber shall be used for testing and shall meet the requirements of Section 4 of ASTM B117, *Standard Test Method for Salt Spray (Fog) Testing*.

8.4.5 Procedure.

8.4.5.1 The SCBA with a fully charged breathing air pressure vessel, with the breathing air pressure vessel valve fully closed, shall be placed in the test chamber attached to a mannequin to simulate its typical wearing position on a firefighter as specified by the manufacturer.

8.4.5.2 SCBA shall not contact each other or the sides of the test chamber.

8.4.5.3 The SCBA shall be placed in the temperature-stabilized chamber for a minimum of 2 hours prior to introduction of the salt solution.

8.4.5.4 The SCBA shall then be exposed to the salt fog for 48 hours, +15 minutes/-0 minutes.

8.4.5.5 Specimen SCBA shall be subjected to a 5 percent, ±1 percent salt solution fog.

8.4.5.5.1 The salt solution shall be prepared by dissolving 5 parts, ±1 part by mass of sodium chloride in 95 parts of water.

8.4.5.5.2 The salt used shall be sodium chloride substantially free of nickel and copper and containing on the dry basis not more than 0.1 percent of sodium iodide and not more than 0.3 percent of total impurities.

8.4.5.5.3 The pH of the salt solution shall be in the range of 6.5 to 7.2.

8.4.5.6 The compressed air supply to the nozzle or nozzles for atomizing the salt solution shall be free of oil and dirt and maintained between 69 kPa/m and 172 kPa/m (10 psi and 25 psi).

8.4.5.7 The exposure temperature in the chamber shall be maintained at 35°C, ±1°C (95°F, ±2°F) for the duration of the test.

8.4.5.8 At least two clean fog collectors shall be placed within the exposure zone so that no drops of solution from the test specimens or any other source shall be collected in them.

8.4.5.8.1 The collectors shall be placed in the proximity of the test specimens, one nearest to any nozzle and the other farthest from all nozzles.

8.4.5.8.2 The fog shall be such that for each 80 cm² (12.4 in.²) of horizontal collecting area from 1.0 mL to 2.0 mL of solution per hour will be collected in each collector.

8.4.5.9 After completion of the salt fog exposure, the SCBA shall be stored in an environment of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±5 percent for a minimum of 48 hours.

8.4.5.10 The SCBA shall then be tested as specified in Section 8.1 to determine pass or fail.

8.4.5.11 All controls or operating features of the SCBA shall operate in accordance with the SCBA manufacturer's instructions to determine pass or fail.

8.4.6 Report.

8.4.6.1 The facepiece pressure peak inhalation and peak exhalation shall be recorded and reported for each test condition.

8.4.6.2 The activation and operation of the EOSTI or the failure of any EOSTI to activate and operate shall be reported and recorded.

8.4.6.3 Where the SCBA is equipped with a HUD, the activation and identification of HUD visual alert signals shall be reported and recorded.

8.4.7 Interpretation.

8.4.7.1 The peak inhalation and peak exhalation shall be used to determine pass or fail performance.

8.4.7.2 One or more specimens failing this test shall constitute failing performance.

8.4.7.3 Failure of any EOSTI alarm signal to activate and remain active during the test shall constitute failing performance.

8.4.7.4 Where the SCBA is equipped with a HUD, failure of the HUD to display the breathing air pressure vessel content or to display the visual alert signal during the test shall constitute failing performance.

8.5 Particulate Test.

8.5.1 Application. This test method shall apply to complete SCBA.

8.5.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.5.3 Specimen Preparation.

8.5.3.1 Prior to testing, specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.5.3.2 Specimens for conditioning shall be complete SCBA.

8.5.4 Apparatus.

8.5.4.1 A Scott Aviation model No. 803608-01 or 803608-02 test headform or equivalent shall be joined to a mannequin to simulate its typical wearing position, as specified by the manufacturer.

8.5.4.2 The test headform shall be connected, as specified in Section 8.1, to the breathing machine specified in 8.1.4.9 or other respiration simulator producing a 1-minute volume of 40 L, ±2 L at the ambient conditions specified in 8.1.3.2, with a minimum tidal volume of 1.6 L per breath at a minimum respiration of 10 breaths/min.

8.5.4.3 A test facility consisting of a chamber and accessories to control dust concentration, velocity, temperature, and humidity of dust-laden air shall be used.

8.5.4.4 To provide adequate circulation of the dust-laden air, no more than 50 percent of the cross-sectional area and no more than 30 percent of the volume of the test chamber shall be occupied by the test item(s).

8.5.4.5* The chamber shall be provided with a means of maintaining and verifying the dust circulation.

8.5.4.6 The dust-laden air shall be introduced into the test space in such a manner as to allow the air to become laminar in flow before it strikes the test item.

8.5.4.7* Dust shall be silica flour and shall contain 97 percent to 99 percent by weight silicon dioxide (SiO₂).

8.5.4.8 The following size distribution shall apply:

- (1) 100 percent shall pass through a 100 mesh screen.
- (2) 98 percent, ±2 percent shall pass through a 140 mesh screen.
- (3) 90 percent, ±2 percent shall pass through a 200 mesh screen.
- (4) 75 percent, ±2 percent shall pass through a 325 mesh screen.

8.5.5 Procedure.

8.5.5.1 A fully charged SCBA shall be secured to a test headform and mannequin as specified in 8.8.4.1.

8.5.5.2 The mannequin, including the test headform, shall be mounted upright and placed inside the test chamber.

8.5.5.3 The temperature of the test chamber shall be adjusted to 22°C, ±3°C (72°F, ±5°F) and the RH to less than 30 percent.

8.5.5.4 The air velocity shall be adjusted to 530 m/min, ±15 m/min (1750 ft/min, ±50 ft/min).

8.5.5.5 The dust concentration for the blowing dust shall be maintained at 10.6 g/m³, ±7 g/m³ (0.3 g/ft³, ±0.2 g/ft³).

8.5.5.6 The test duration shall be 1 hour, and the breathing machine shall be operating throughout the entire test.

8.5.5.6.1 The test shall be permitted to be interrupted to allow the SCBA breathing air pressure vessel to be changed.

8.5.5.6.2 Test item configuration and orientation shall be turned around its vertical axis 180 degrees midway through the test.

8.5.5.7 After the completion of the test, the SCBA shall be removed from the test compartment.

8.5.5.8 The SCBA shall be lightly shaken or brushed free of dust and then shall be tested as specified in Section 8.1 to determine pass or fail.

8.5.6 Report.

8.5.6.1 The facepiece pressure peak inhalation and peak exhalation shall be recorded and reported for each test condition.

8.5.6.2 The activation and operation of the EOSTI or the failure of any EOSTI to activate and operate shall be recorded and reported.

8.5.6.3 Where the SCBA is equipped with a HUD, the activation and identification of HUD visual alert signals shall be recorded and reported.

8.5.7 Interpretation.

8.5.7.1 The peak inhalation and peak exhalation shall be used to determine pass or fail performance.

8.5.7.2 One or more specimens failing this test shall constitute failing performance.

8.5.7.3 Failure of any EOSTI alarm signal to activate and remain active during the test shall constitute failing performance.

8.5.7.4 Where the SCBA is equipped with a HUD, failure of the HUD to display the breathing air pressure vessel content or display the visual alert signal during the test shall constitute failing performance.

8.6 Facepiece Lens Abrasion Test.

8.6.1 Application. This test method shall apply to facepiece lenses.

8.6.2 Samples. A minimum of four facepiece lenses shall be tested.

8.6.3 Specimen Preparation.

8.6.3.1 Seven specimens shall be chosen from a minimum of four facepiece lenses.

8.6.3.1.1 Four specimens shall be taken from the left viewing area, and three samples shall be taken from the right viewing area.

8.6.3.1.2 One of the four specimens taken from the left viewing area shall be the set-up specimen.

8.6.3.2 The left test specimens shall conform to all the following criteria:

- (1) The specimen shall be a square measuring 50 mm × 50 mm (2 in. × 2 in.).
- (2) Two edges of the square section shall be parallel within ±2 degrees of the axis of the breathing air pressure vessel or cone in the center of the specimen.
- (3) At least 38 mm (1½ in.) of the 50 mm × 50 mm (2 in. × 2 in.) square shall be taken from the left side of the center line of the lens.

- (4) The 50 mm × 50 mm (2 in. × 2 in.) square shall be cut at approximately eye level.

8.6.3.3 The right test specimens shall conform to all the following criteria:

- (1) The specimen shall be a square measuring 50 mm × 50 mm (2 in. × 2 in.).
- (2) Two edges of the square section shall be parallel within ±2 degrees of the axis of the breathing air pressure vessel or cone in the center of the specimen.
- (3) At least 38 mm (1½ in.) of the 50 mm × 50 mm (2 in. × 2 in.) square shall be taken from the right side of the center line of the lens.
- (4) The 50 mm × 50 mm (2 in. × 2 in.) square shall be cut at approximately eye level.

8.6.3.4 Each of the specimens shall be cleaned in the following manner:

- (1) The specimen shall be rinsed with clean tap water.
- (2) The specimen shall be washed with a solution of nonionic/low-phosphate detergent and water using a clean, soft gauze pad.
- (3) The specimen shall be rinsed with de-ionized water.
- (4) The specimen shall be blown dry with clean compressed air or nitrogen.

8.6.4 Apparatus. The test apparatus shall be constructed in accordance with Figure 8.6.4(a) and Figure 8.6.4(b).

8.6.5 Procedure.

8.6.5.1 The haze of the specimen shall be measured using a haze meter in accordance with ASTM D1003, *Standard Test Method for Haze and Luminous Transmittance of Transparent Plastics*, and recorded with the following additions:

- (1) The haze shall be measured in the middle of the specimen ±1.6 mm (± 1/16 in.).
- (2) The specimen shall be repositioned to achieve the maximum haze value within the area defined in 8.6.5.1 (1).
- (3) The haze meter shall have a specified aperture of 22.4 mm (7/8 in.).
- (4) The haze meter shall have a visual display showing 0.1 percent resolution.
- (5) The haze meter shall be calibrated before and after each day's use following procedures specified in ASTM D1003, *Standard Test Method for Haze and Luminous Transmittance of Transparent Plastics*.

8.6.5.2 The set-up specimen shall be placed cover side up in the test apparatus specimen holder.

8.6.5.3 The specimen holder shall be configured with a flat surface under the lens or with an inner radius support.

8.6.5.4 The pad holder shall consist of a cylinder 10 mm (3/8 in.) high and 25 mm (1 in.) in diameter with a radius of curvature equal to the radius of curvature of the outside of the lens in the viewing area, ±0.25 diopter. The cylinder shall be

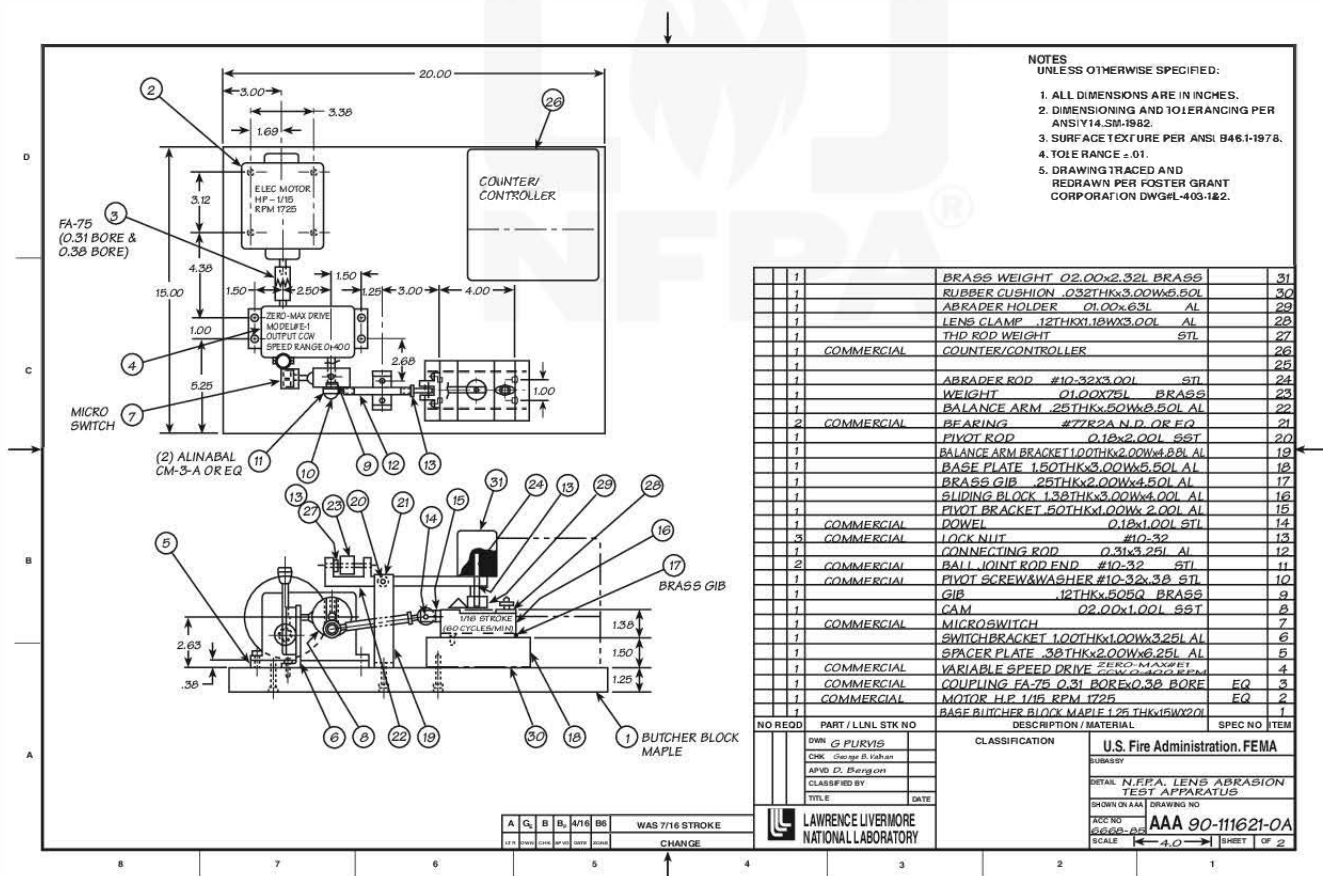


FIGURE 8.6.4(a) Lens Abrasion Tester.

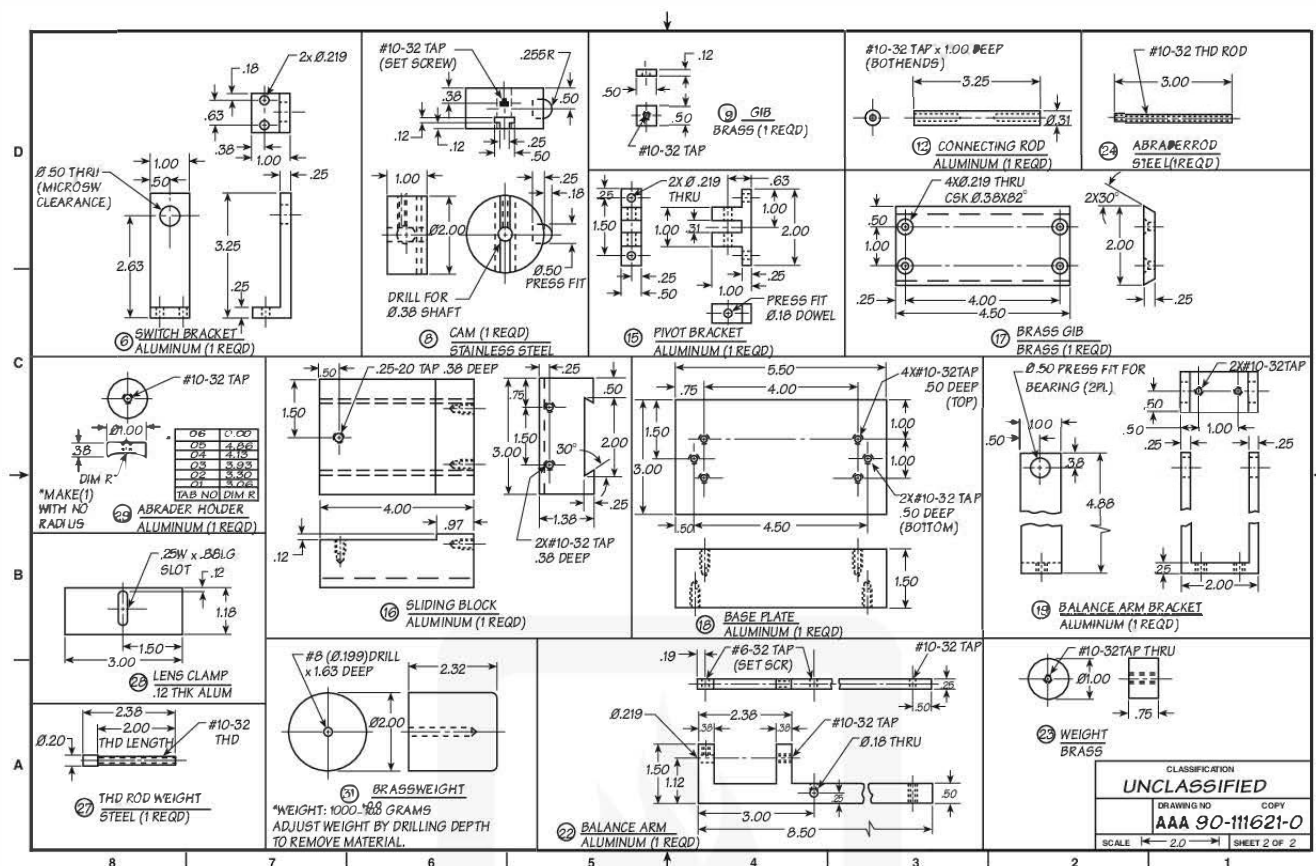


FIGURE 8.6.4(b) Lens Abrasion Tester (details).

rigidly affixed to the stroking arm by a #10-32 UNF threaded rod.

8.6.5.5 The pad shall be a Blue Streak M306M wool felt polishing pad or equivalent, 24 mm ($1\frac{1}{16}$ in.) in diameter.

8.6.5.6 The abrasive disc shall be made from 3M Part Number 7415, Wood Finishing Pad or equivalent.

8.6.5.6.1 A disc 24 mm ($1\frac{1}{16}$ in.) in diameter shall be cut from the abrasive sheet.

8.6.5.6.2 The marked side of the disc shall be placed against the pad.

8.6.5.6.3 The orientation described in 8.6.5.6.2 shall be maintained for each abrasive disc throughout the testing.

8.6.5.7 The pad holder, pad, and abrasive disc shall be installed on the stroking arm.

8.6.5.7.1 The stroking arm shall be leveled to ± 3 degrees by adjusting the threaded pin.

8.6.5.7.2 The pin shall be secured to prevent rotation of the pad holder.

8.6.5.7.3 The axis of curvature of the pad holder shall be coincident with the axis of curvature of the lens.

8.6.5.8 The stroking arm shall be counterbalanced with the pad holder, pad, and abrasive disc in place.

8.6.5.9 The set-up specimen shall be replaced with one of the six specimens to be tested.

8.6.5.10 The 1000 g, ± 5 g (2.2 lb, ± 0.18 lb) test weight shall be installed on the pin above the test specimen.

8.6.5.11 The test shall be run for 200 cycles, ± 1 cycle. One cycle shall consist of a complete revolution of the eccentric wheel.

8.6.5.12 The length of stroke shall be 14.5 mm ($\frac{9}{16}$ in.), producing a pattern 38 mm ($1\frac{1}{2}$ in.) long.

8.6.5.12.1 The frequency of the stroke shall be 60 cycles, ± 1 cycle, per minute.

8.6.5.12.2 The center of the stroke shall be within ± 2 mm ($\pm \frac{1}{16}$ in.) of the center of the specimen.

8.6.5.13 The specimen shall be removed and cleaned following the procedure specified in 8.6.3.4.

8.6.5.14 The abrasive disc shall be discarded.

8.6.5.15 The haze of the specimen shall be measured following the procedure specified in 8.6.5.1.

8.6.5.16 The delta haze shall be calculated by subtracting the initial haze from the final haze.

8.6.5.17 The testing steps specified in 8.6.3.4 through 8.6.5.16 shall be repeated five times with a new specimen and abrasive disc.

8.6.6 Report.

8.6.6.1 The six delta haze values shall be recorded, and the values shall be averaged and reported.

8.6.6.2 The average value shall be used to determine pass or fail.

8.6.7 Interpretation.

8.6.7.1 The average delta haze shall be used to determine pass or fail performance.

8.6.7.2 Failure of the average value shall constitute failure for the entire sample.

8.7 Nonelectronic Communications Test.

8.7.1 Application. This test method shall apply to complete SCBA facepieces and second stage regulator(s).

8.7.2 Samples. Each sample to be tested shall be as specified in 4.3.9 with all voice communications systems installed, including supplementary voice communications systems, and in the "off" mode in accordance with the manufacturer's instructions.

8.7.3 Specimen Preparation.

8.7.3.1 Prior to testing, specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.7.3.2 Specimens for conditioning shall be complete medium-size SCBA facepiece(s) and inner mask(s), with the second stage regulator(s) installed in the "as worn" position as specified by the manufacturer.

8.7.4 Apparatus.

8.7.4.1 Testing shall be conducted in a chamber having the following minimum characteristics:

- (1) Minimum room dimensions: 4.6 m long × 3.1 m wide × 2.7 m high (15 ft long × 10 ft wide × 9 ft high)
- (2) Construction: hemi-anechoic
- (3) Ambient noise level inside chamber: NC-25
- (4) Walls and ceiling: ≥90 percent absorptive for 100 Hz

8.7.4.1.1 All surfaces above the floor shall be acoustically treated for internal acoustic absorption, as well as for external noise mitigation.

8.7.4.2 A G.R.A.S. KEMAR Head and Torso Simulator (HATS) Type 45BM shall be used for testing.

8.7.4.2.1 The mouth simulator shall be capable of producing 112 dB/1 kHz sine tone at 25 mm (1 in.) with the mouth reference point unequalized, and the total harmonic distortion (THD) shall be ≤3 percent.

8.7.4.2.2 The mouth simulator frequency response shall be able to be equalized flat ±1 dB between 100 Hz and 10 kHz, and the response shall be -15 dB or less at 100 Hz and -20 dB or less at 15 kHz.

8.7.4.3 The sound pressure level (SPL) meter having the following characteristics shall be used:

- (1) The SPL meter shall be capable of applying an equivalent continuous sound pressure level (Leq) using an A-weighted filter.
- (2) The SPL meter shall have a dynamic range from 30 dB (or less) to 130 dB (or more).

- (3) The SPL meter shall display the measurement to at least one decimal place.

8.7.4.4 The signal/pink noise analog audio signal generators having the characteristics described in 8.7.4.4.1 and 8.7.4.4.2 shall be used.

8.7.4.4.1 One generator shall be capable of playing wave files in the following format: 48 kHz, 16-bit mono at the output level of 0 dB, FS = 18 dBu, according to EBU Technical Recommendation R68, *Alignment level in digital audio production equipment and in digital audio recorders*.

8.7.4.4.2 The second generator shall be capable of generating pink noise and sine waves from -80 dBu to -2 dBu in one-digit steps, with a THD+N of -90 dB (0.0032 percent) at 8 dBu noise floor type 25uv, and shall also have the following characteristics:

- (1) A frequency range of 10 Hz to 20 kHz in one-digit steps ±0.01 percent
- (2) An amplitude accuracy of within ±0.5 dB or less

8.7.4.5 A digital equalizer having the following characteristics shall be used:

- (1) The digital equalizer shall be capable of at least two concurrently selectable equalizer sections:
 - (a) One 31-band graphic with an adjustment range of at least ±18 dB
 - (b) A 10-band parametric with an adjustment range of at least ±18 dB
- (2) The digital equalizer shall have a dynamic range of 112 dB.
- (3) The digital equalizer shall be capable of equalizing the frequency response of the HATS mannequin of ±1 dB flat between 100 Hz and 10 kHz, applying a 180 Hz high pass filter with a slope of -24 dB octave, and a 10 Hz low pass filter with a slope of -24 dB octave (-15 dB at 100 Hz, -20 dB at 15 kHz).

8.7.4.6 A powered speaker having the following characteristics shall be used:

- (1) The sensitivity shall be ≥84 dB at 1 watt at 1 meter.
- (2) The frequency response shall be rated at ≤80 Hz to ≥13 kHz.
- (3) The amplifier shall deliver ≥10 watts with a total harmonic distortion <1 percent.

8.7.4.7 A microphone having the following characteristics shall be used:

- (1) The microphone shall be a condenser type.
- (2) The microphone polar pattern shall be omnidirectional.
- (3) The frequency response shall be flat ±0.5 dB from 100 Hz to 15 kHz.
- (4) The residual noise shall be ≤-30 dB.
- (5) The microphone shall accept signals of at least 130 dBA.

8.7.4.8 A speech transmission index (STI) analyzer having the following characteristics shall be used:

- (1) The STI PA analyzer shall be capable of measuring and displaying a single value STI PA result to two decimal places with a seven octave band modulated noise test signal using the Netherlands Organization for Applied Scientific Research (TNO) verified algorithm.

- (2) The STI PA analyzer shall conform to IEC 60268, *Sound System Equipment — Part 16: Objective Rating of Speech Intelligibility by Speech Transmission Index*.

8.7.4.9 All the apparatus identified in 8.7.4.2, 8.7.4.3, 8.7.4.4, 8.7.4.5, 8.7.4.6, and 8.7.4.7 shall be located in the hemi-anechoic chamber and arranged as shown in Figure 8.7.4.9(a) and Figure 8.7.4.9(b).

8.7.4.10 The HATS test mannequin shall be positioned in the chamber in the following manner as shown in Figure 8.7.4.9(a) and Figure 8.7.4.9(b).

8.7.4.10.1 The distance between the HATS test mannequin and the microphone shall be 1.5 m, +25 mm/−0 mm (5 ft, +1 in./−0 in.), and they shall be facing each other.

8.7.4.10.2 The distance between the HATS test mannequin mouth reference point (MRP) and the floor shall be 1.5 m, +25 mm/−0 mm (5 ft, +1 in./−0 in.).

8.7.4.10.3 The distance between the microphone and the floor shall be 1.5 m, +25 mm/−0 mm (±5 ft, +1 in./−0 in.).

8.7.4.11 The test chamber shall be filled with broadband pink noise with a tolerance of ±1 dB per octave band from 100 Hz to 10 kHz.

8.7.4.12 The pink noise speaker shall be placed directly beneath the microphone and oriented such that the central axis of the speaker cone is directly facing the microphone.

8.7.4.12.1 The speaker shall be situated on top of a block of isolating acoustic foam such that no part of the speaker box is contacting the floor or the microphone stand, to prevent conduction of sound to the microphone.

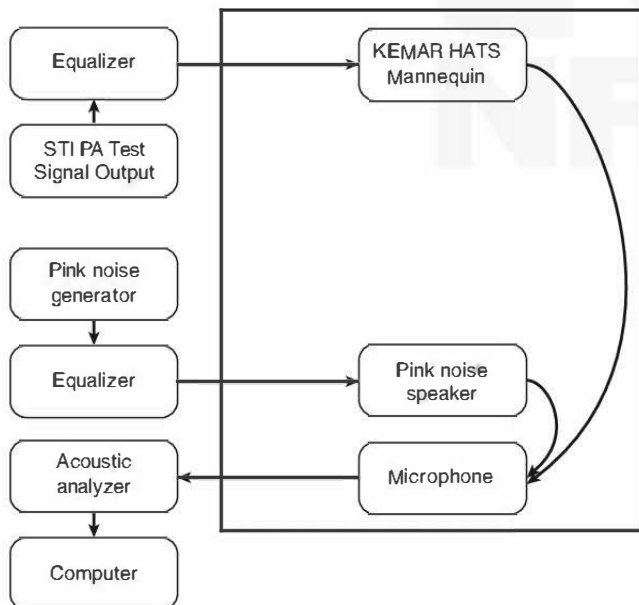


FIGURE 8.7.4.9(a) Hemi-Anechoic Chamber.

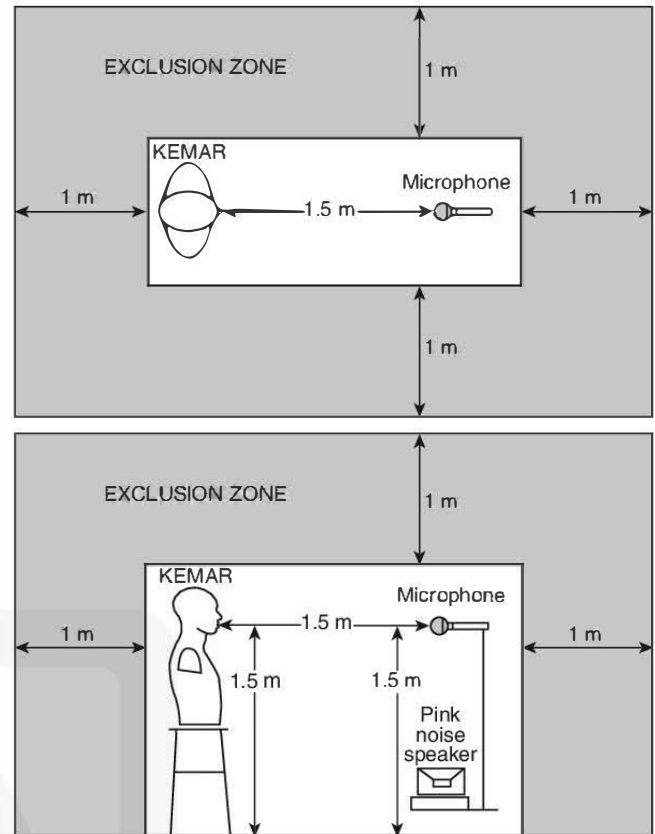


FIGURE 8.7.4.9(b) HATS Test Mannequin Position.

8.7.4.12.2* The height of the speaker off the floor shall be at least 125 mm (5 in.), as measured from the bottom of the speaker box, and the distance between the speaker and the microphone shall be no less than 1 m (40 in.), as measured from the top of the speaker grille/enclosure.

8.7.4.12.3 The pink noise speaker shall be placed as indicated in Figure 8.7.4.12.3.

8.7.4.13 The pink noise speaker shall be fully equalized flat, from 100 Hz to 10 kHz, to within ±1 dB on a relative scale in 1/3 octave bands, as measured at the microphone position.

8.7.4.14 The STI test signal from the mannequin shall be adjusted to achieve an A-weighted sound level of 97 dB, ±0.5 dB at the mouth reference point (MRP), 50 mm, ±3 mm (2 in., ±1/8 in.) from the test mannequin's mouth.

8.7.4.14.1 The microphone used for calibrating the STI signal shall be omnidirectional and oriented in a horizontal front-facing manner.

8.7.4.14.2 The STI signal shall be equalized flat to within ±1 dB on a relative scale in 1/3 octave bands as measured at the MRP of the HATS.

8.7.4.14.3 The HATS shall be calibrated as follows:

- (1) Equalize flat with pink noise to 97 dBA from 100 Hz – 10 kHz to ±1 dB on a 1/3 octave scale.
- (2) Reduce the levels for the 125 Hz octave band (the 100, 125, 160 1/3 octave bands) by 10 dB.

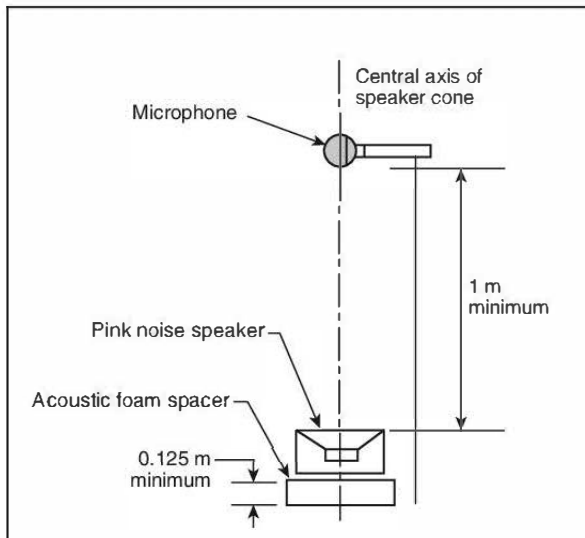


FIGURE 8.7.4.12.3 Test Chamber.

- (3) Reduce the levels for the 250 Hz octave band (the 200, 250, 315 $\frac{1}{2}$ octave bands) by 2 dB.
- (4) Apply the STI PA signal and adjust the sound pressure level (SPL) to 97 dBA, ± 0.5 dBA.

8.7.4.15* The gain of the powered speaker amplifier used to generate the pink noise shall be adjusted to achieve an A-weighted sound level of 32 dB, ± 0.5 dB below the signal level generated as identified in 8.7.4.14, measured at the microphone placed as identified in 8.7.4.10.1 and 8.7.4.10.3.

8.7.5 Procedure.

8.7.5.1 The method for measuring the STI shall be as specified in IEC 60268, *Sound System Equipment — Part 16: Objective Rating of Speech Intelligibility by Speech Transmission Index*, with the modified apparatus specified in 8.7.4.

8.7.5.2 The medium-size facepiece with inner mask and second stage regulator in the normal use mode shall be fitted to the HATS test mannequin in the following manner:

- (1) Place the chin of the mannequin in the “chin cup” of the facepiece.
- (2) Place the facepiece to seal against the face of the HATS test mannequin.
- (3) Pass the head harness of the facepiece over the HATS test mannequin and tighten it in a manner that maintains the symmetry of the facepiece on the HATS test mannequin, using talc to minimize friction between the HATS test mannequin and the strap.
- (4) Tighten the straps to a tension of 50 N (11.2 lbf).

8.7.5.3 Three medium-size facepieces shall be tested in the chamber having an ambient noise field as specified in 8.7.4.11 through 8.7.4.15.

8.7.5.4 Each facepiece shall be mounted as specified in 8.7.5.2 and then tested as follows:

- (1) Three separate measurements shall be recorded for each donning of the facepiece.
- (2) Five separate donnings shall be performed.
- (3) A total of 45 measurements shall be taken: 3 (facepieces) $\times$ 3 (measurements) $\times$ 5 (donnings) = 45 measurements.

8.7.6 Report.

8.7.6.1 The STI PA signal (SPL per octave band, the modulation transfer index per octave band, and the overall STI score at the mouth reference point (MRP) (see 3.3.40) shall be recorded and reported.

8.7.6.2 The STI PA signal SPL per octave band, the modulation transfer index per octave band, and the overall STI score at the microphone measurement point (MMP) (see 3.3.37) shall be recorded and reported.

8.7.6.3 The pink noise SPL per octave band at the MMP (see 3.3.37) shall be recorded and reported.

8.7.6.4 The STI score for each facepiece measurement sampled as described in 8.7.5.3 (a total of 45 scores) shall be recorded and reported, and the starting time of each facepiece donning shall be recorded.

8.7.6.5 The average for each donning shall be calculated, recorded, and reported. There shall be a total of 15 averages of three measurements (five averages for each of the three facepiece samples). See Figure 8.7.6.5.

8.7.7 Interpretation.

8.7.7.1 The averages calculated in 8.7.6.5 shall be used to determine a pass or fail in accordance with Section 7.7.

8.7.7.2 If any of the 15 averages score less than the minimum threshold specified in Section 7.7, the facepiece shall be considered to have failed and shall be reported as such.

8.7.7.3 If all of the 15 averages score are equal to or greater than the minimum threshold specified in Section 7.7, the facepiece shall be considered to have passed and shall be reported as such.

8.8 Flame Test.

8.8.1 Application. This test method shall apply to complete SCBA.

8.8.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.8.3 Specimen Preparation.

8.8.3.1 Prior to testing, specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, $\pm 3^\circ\text{C}$ (72°F, $\pm 5^\circ\text{F}$) and RH of 50 percent, ± 25 percent.

8.8.3.2 Specimens for conditioning shall be complete SCBA.

8.8.4 Apparatus.

8.8.4.1 A test mannequin meeting the requirements specified in Figure 8.8.4.1 shall be provided.

8.8.4.1.1 Calibration Mannequin. The mannequin used for calibration shall be outfitted with a total of 12 thermocouples, 6 on the front and 6 on the back. The thermocouples shall be 20 AWG type K (Chromel-Alumel).

8.8.4.2 Both the calibration mannequin and the flame test mannequin shall have protective coverings.

8.8.4.2.1 The protective coverings shall be a weld blanket made of fireproof silica cloth of a minimum weight of 18 oz/yd².

Sample Recording Sheet for STI Test

1. Tested Per Procedure:

_____ 7.7 Nonelectronic Communications Performance Requirements.

_____ 7.14 Supplementary Voice Communications System Performance Requirements.

2. Setup Information:

STIPA Signal data at Mouth Reference Point (MRP)

#	STI	Sound Pressure Levels							Modulation Transfer Index						
		125	250	500	1000	2000	4000	8000	125	250	500	1000	2000	4000	8000
1															
2															
3															
4															

1 — Initial measurement prior to fireplace testing started

2 — Final measurement after fireplace testing commenced

3 & 4 — Supplemental measurements for testing breaks greater than 1 hour during testing

STIPA Signal data at Microphone Measurement Point (MMP)

#	STI	Sound Pressure Levels							Modulation Transfer Index						
		125	250	500	1000	2000	4000	8000	125	250	500	1000	2000	4000	8000
1															
2															
3															
4															

1 — Initial measurement prior to fireplace testing started

2 — Final measurement after fireplace testing commenced

3 & 4 — Supplemental measurements for testing breaks greater than 1 hour during testing

Pink Noise data at Microphone Measurement Point (MMP)

#	STI	Sound Pressure Levels							Modulation Transfer Index						
		125	250	500	1000	2000	4000	8000	125	250	500	1000	2000	4000	8000
1															
2															
3															
4															

1 — Initial measurement prior to fireplace testing started

2 — Final measurement after fireplace testing commenced

3 & 4 — Supplemental measurements for testing breaks greater than 1 hour during testing

FIGURE 8.7.6.5 Sample Recording Sheet for STI Test.

3. Measurement Information

- Record STI score per facepiece/donning/measurement
- Use the notes column to indicate Pass/Fail and/or observations
- Extra rows are provided if necessary

Faceplate Sample 1

Don #	STI Scores				Notes
	Meas 1	Meas 2	Meas 3	Avg	
1					
2					
3					
4					
5					

Faceplate Sample 2

Don #	STI Scores				Notes
	Meas 1	Meas 2	Meas 3	Avg	
1					
2					
3					
4					
5					

Faceplate Sample 3

Don #	STI Scores				Notes
	Meas 1	Meas 2	Meas 3	Avg	
1					
2					
3					
4					
5					

4. Pass/Fail

Indicate whether the facepiece passed or failed as whole per 8.10.7 or 8.23.7 respectively

_____ PASS

_____ FAIL

FIGURE 8.7.6.5 *Continued*

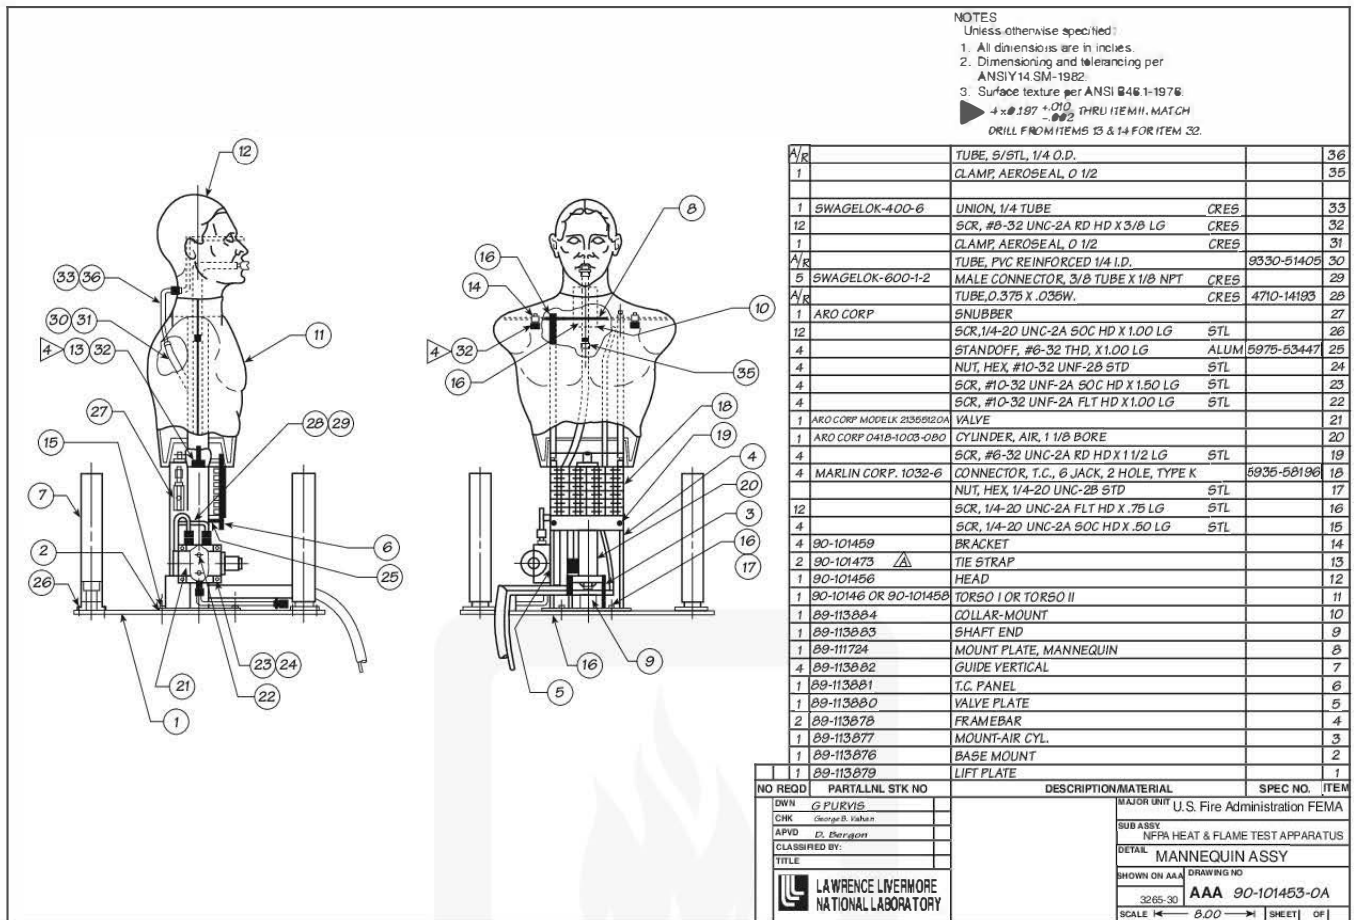


FIGURE 8.8.4.1 Test Mannequin.

8.8.4.2.2 The protective coverings shall be designed and constructed to provide coverage over the surface of the mannequins.

8.8.4.2.3 Where additional insulation is needed to protect the mannequin electronics, an additional thermal liner underlayer shall be permitted.

8.8.4.2.4 The complete protective covering shall be discarded and shall not be used where the damage to any portion indicates the covering can no longer provide thermal protection for the test mannequin.

8.8.4.3 A test headform meeting the requirements specified in 8.1.4.1 shall be used on the test mannequin.

8.8.4.4 The test headform shall be attached to the breathing machine as specified in Figure 8.1.4.9 with the modification that a 38 mm (1½ in.) I.D. breathing hose not longer than 7.6 m (25 ft) shall connect the breathing machine and the throat tube of the test mannequin headform.

8.8.4.5 The test headform shall be covered with a hood for protection of the headform during testing.

8.8.4.5.1 The protective hood, when placed on the test headform, shall not affect the seal of the facepiece to the headform.

8.8.4.5.2 The protective hood shall not cover or protect any part of the facepiece or the facepiece retention system that holds the facepiece to the headform.

8.8.4.6 The flame test apparatus shall be as specified in Figure 8.8.4.6.

8.8.5 Procedure.

8.8.5.1 The SCBA shall be mounted on the test mannequin to simulate the correct wearing position on a person as specified by the SCBA manufacturer's instructions.

8.8.5.2 The facepiece shall be mounted and tested on the test headform as specified in 8.1.4.1.

8.8.5.3 For calibration prior to the flame test, the mannequin for calibration shall be the same as the test mannequin specified in 8.8.4.1 and shall be exposed to direct flame contact for 10 seconds using the flame test apparatus.

8.8.5.3.1 All peak temperature readings shall be within a temperature range of 815°C to 1150°C (1500°F to 2102°F).

8.8.5.3.2 The average mean of all peak temperature readings specified in 8.8.5.3.1 shall be no higher than 950°C (1742°F).

8.8.5.4 The airflow performance test shall be conducted as specified in 8.1.5, with the ventilation rate specified in 8.8.5.6 and with the test temperatures specified in 8.8.5.3.

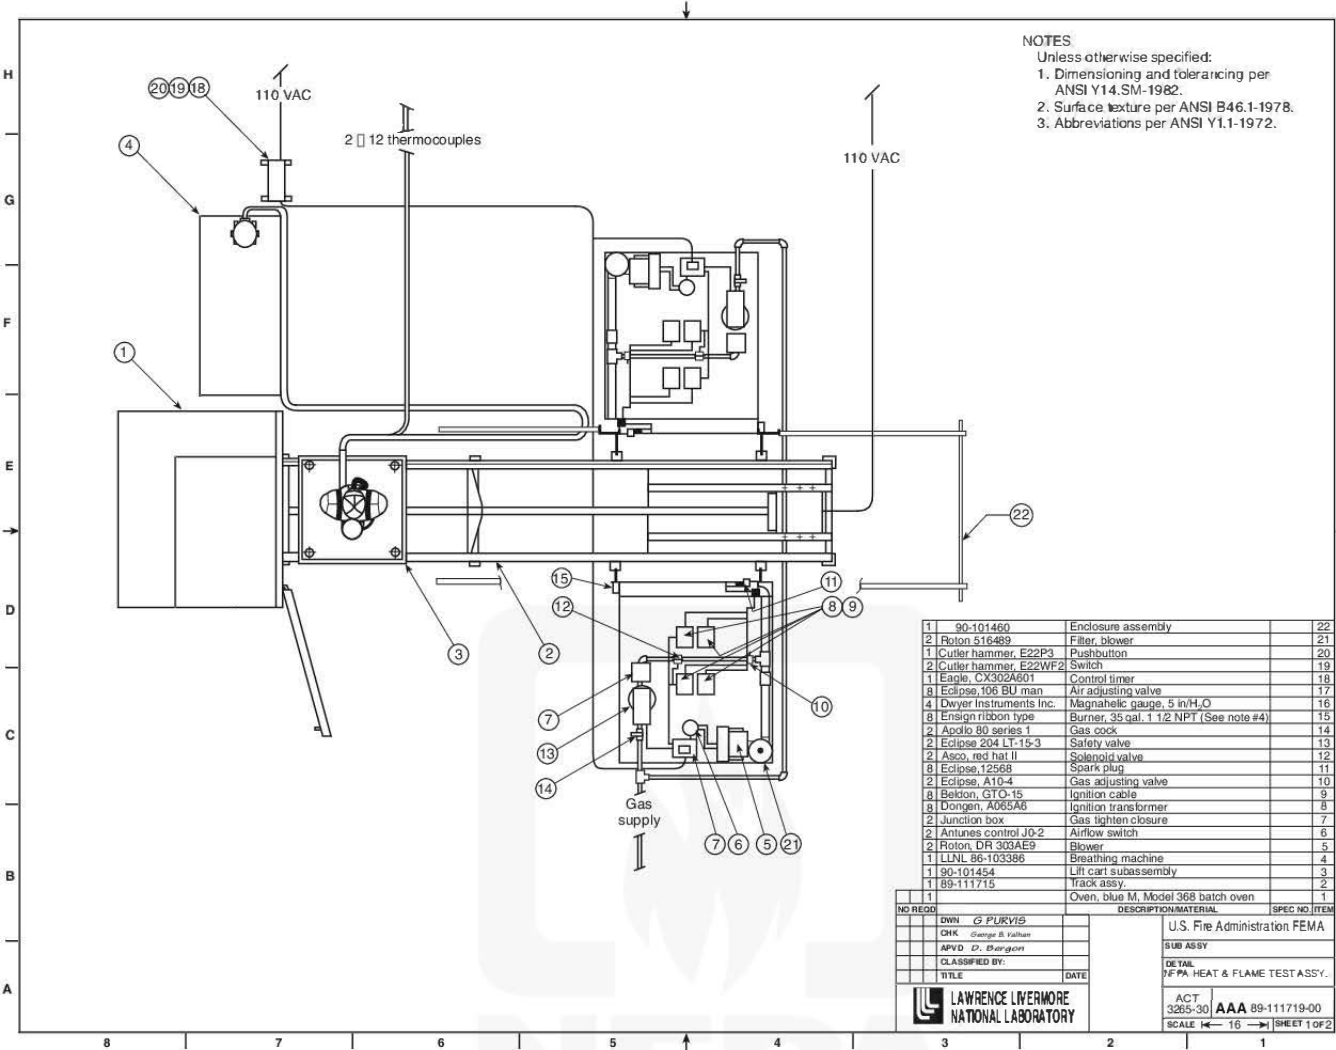


FIGURE 8.8.4.6 Flame Test Apparatus.

- 8.8.5.4.1 The variation in pressure extremes caused by the flame test mannequin configuration shall be determined as specified in 8.8.5.4.2 and 8.8.5.4.3.
- 8.8.5.4.2 The airflow performance test as specified in Section 8.1 shall be carried out using the configuration specified in 8.8.4.4 at the same ventilation rates.
- 8.8.5.4.3 The difference in pressure between the two tests shall be calculated by subtracting the values obtained using the configuration defined in 8.8.4.4 from the values obtained using the configuration specified in Section 8.1.
- 8.8.5.5 The airflow performance test shall continue through the drop test specified in 8.8.5.11.
- 8.8.5.6 Prior to the test mannequin being entered into the burner array, the ventilation rate shall be set to 103 L/min, ± 3 L/min, as specified in 8.1.4.10.7.
- 8.8.5.7 The SCBA mounted on the test mannequin shall be moved into the center of the burner array.

- 8.8.5.8 The SCBA shall then be exposed to direct flame contact for 5 seconds, $+0.25$ second/ -0.0 second.
- 8.8.5.9 The exposure shall begin no less than 1 minute and no more than 3 minutes after the start of breathing.
- 8.8.5.10 The SCBA shall be observed for any afterflame, and the afterflame duration shall be recorded to determine pass or fail as specified in 7.8.2.
- 8.8.5.11 Within 20 seconds after the direct flame exposure has been completed, the SCBA mounted on the test mannequin shall be raised 150 mm, $+6$ mm/ -0 mm (6 in., $+1/4$ in./ -0 in.) and dropped freely.
- 8.8.5.12 The SCBA shall be observed to determine pass or fail performance as specified in 7.8.3.
- 8.8.5.13 The facepiece pressure during the entire test shall be read from the strip chart recorder and corrected by adding the value of the difference in pressure calculated in 8.8.5.4.1 to determine pass or fail as specified in 7.8.1.

8.8.5.14 Any pressure spike caused by the impact of the drop test and measured within a duration of three cycles of the breathing machine after the apparatus drop shall be disregarded.

8.8.5.15 The SCBA facepiece shall be removed from the test headform and shall be donned by a test subject without touching the facepiece lens. If the SCBA is equipped with a HUD, the SCBA facepiece and the HUD shall be removed from the test headform and shall be donned by a test subject without touching the facepiece lens or the HUD.

8.8.5.15.1 The test subject shall have visual acuity of 20/20 in each eye, uncorrected or corrected with contact lenses.

8.8.5.15.2 If the SCBA is equipped with a HUD, the test subject shall then observe the HUD display to see that visual alert signal(s) have activated.

8.8.5.15.2.1 The test subject shall identify the visual alert signals that are activated.

8.8.5.16 The SCBA facepiece removed from the test headform and donned by the test subject as specified in 8.8.5.15 shall be used for determining facepiece lens vision.

8.8.5.16.1 The test shall be conducted using a standard 6.1 m (20 ft) eye chart with normal lighting range of 120 to 150 ft-candles at the chart and with the test subject positioned at a distance of 6.1 m (20 ft) from the chart.

8.8.5.16.2 The test subject shall then read the standard eye chart through the nominal center of the lens of the facepiece to determine pass or fail performance as specified in 7.8.4.

8.8.5.16.3 The nominal center of the lens shall be the area bounded by a line 50 mm (2 in.) above, 50 mm (2 in.) below, 50 mm (2 in.) left of, and 50 mm (2 in.) right of the intersection of the basic and midsagittal planes.

8.8.5.17 The activation of the EOSTI shall be observed.

8.8.6 Report.

8.8.6.1 The facepiece pressure peak inhalation and peak exhalation shall be recorded and reported for each test condition.

8.8.6.2 Any afterflame beyond 5 seconds shall be recorded and reported.

8.8.6.3 The facepiece lens vision shall also be recorded and reported.

8.8.6.4 The activation and operation of the EOSTI or the failure of the EOSTI to activate and operate shall be recorded and reported.

8.8.6.5 The activation and identification of HUD visual alert signals shall be recorded and reported.

8.8.7 Interpretation.

8.8.7.1 Pass or fail performance shall be based on any observed afterflame, the peak inhalation and exhalation values, and the facepiece vision value.

8.8.7.2 Failure to meet any of the test condition requirements shall constitute failure of the SCBA.

8.8.7.3 Failure of any EOSTI alarm signals to activate and remain active during the test shall constitute failing performance.

8.8.7.4 Failure of the HUD to display the breathing air pressure vessel content or to display the visual alert signals during the test shall constitute failing performance.

8.9 Facepiece Carbon Dioxide Content Test.

8.9.1 Application. This test shall apply to all SCBA facepieces.

8.9.2 Specimens. Each SCBA facepiece model and size shall be tested.

8.9.3 Specimen Preparation. Prior to testing, specimens shall be conditioned for a minimum of 4 hours and then tested at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.9.4 Procedure. Specimens shall be tested as specified in Section 8.14 of EN 136, *Respiratory protective devices — Full face masks — Requirements, testing, marking*.

8.9.5 Report. The facepiece carbon dioxide content shall be recorded and reported for each test specimen.

8.9.6 Interpretation.

8.9.6.1 The facepiece carbon dioxide content shall be used to determine pass or fail performance.

8.9.6.2 One or more specimens failing this test shall constitute failing performance.

8.10 EOSTI Recognition Test.

8.10.1 Application. This test method shall apply to complete SCBA.

8.10.2 Sample. The sample for testing shall be selected as specified in 4.3.9.

8.10.3 Specimen Preparation. Prior to testing, the specimen shall be conditioned for a minimum of 4 hours at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.10.4 Apparatus.

8.10.4.1 An adapter shall be provided that allows the test subject to manually switch between a breathing air supply greater than 30 percent of the SCBA breathing air pressure vessel rated service pressure and a breathing air supply pressure of 18 bar, ±1 bar (265 psi, ±15 psi).

8.10.4.2 The test subject shall wear a complete Class 2 nonencapsulating ensemble with gloves and footwear certified as compliant with NFPA 994. The certified Class 2 nonencapsulating ensemble shall not be required to include the SCBA under test as part of its NFPA 1990 certification.

8.10.4.3 Testing shall be performed with the test subject walking at 5 km/hr, ±0.2 km/hr (3 mph, ±0.12 mph) on a treadmill at zero percent grade.

8.10.4.4 Testing shall be conducted in a test chamber that absorbs a minimum of 90 percent of all sound from 500 Hz to 5000 Hz.

8.10.4.5 The test subject shall have “audiometrically normal” hearing as defined in Section 5.3 of ANSI/ASA S3.2, *Method for Measuring the Intelligibility of Speech over Communication Systems*, in the range of 500 Hz to 3000 Hz.

8.10.4.6 The test subject shall have had a physical examination conducted by a physician within the 12 months immediately preceding the date of testing.

8.10.4.7 The treadmill shall be positioned in the test chamber specified in 8.10.4.4 in a location that meets the conditions for background noise, lighting, and distraction specified in 8.10.4.8 and 8.10.4.9.

8.10.4.8 The test chamber shall be filled with pink noise with a tolerance of 6 dB per octave band from 400 Hz to 4000 Hz and shall be adjusted to achieve an A-weighted sound level of 75 dB, ± 2 dB measured at each ear of the test subject when the subject is walking on the treadmill as specified in 8.10.4.3.

8.10.4.8.1 The forward axis of the loudspeaker shall be located as far as possible from and pointed away from the test subject so as to create a quasi-uniform sound field at the test subject's ears.

8.10.4.8.2 More than one loudspeaker shall be permitted to be used to achieve the desired sound level.

8.10.4.9 The area in the test chamber where the test subject's head is positioned when the subject is standing in the walking location on the treadmill shall be artificially lighted to achieve a light level between 100 lux and 500 lux.

8.10.4.10 A reading stand containing printed text shall be positioned relative to the treadmill as follows:

- (1) The vertical center of the text shall be in line with the center of the treadmill track within ± 100 mm (± 4 in.).
- (2) The horizontal center of the text shall be at the same height, ± 100 mm (± 4 in.), as the eye level of the test subject when the subject is standing in the walking position on the treadmill.
- (3) The text shall be at a distance from the test subject that permits the text to be read by the subject while the subject is walking on the treadmill.

8.10.5 Procedure.

8.10.5.1 SCBA test specimens shall be tested at an ambient temperature of 22°C, ± 3 °C (72°F, ± 5 °F) and RH of 50 percent, ± 25 percent.

8.10.5.2 The test subject wearing the protective ensemble specified in 8.10.4.3 shall don the test specimen SCBA and begin walking on the treadmill in the ambient conditions specified in 8.10.4.8 and 8.10.4.9.

8.10.5.3 While breathing from the SCBA, the test subject shall read aloud the printed text.

8.10.5.4 The person conducting the testing shall switch from the breathing air supply at greater than 30 percent of breathing air pressure vessel rated service pressure to 18 bar, ± 1 bar (265 psi, ± 15 psi) at a random point between 30 seconds and 120 seconds from the commencement of the test.

8.10.5.5 The test subject shall acknowledge recognition of the alarm signal immediately upon becoming aware of it by a gesture that has been predetermined between the test subject and the person performing the testing.

8.10.6 Report. The time elapsed between the switch to low supply air pressure and the acknowledgement of recognition of the EOSTI alarm signal by the test subject shall be recorded and reported.

8.10.7 Interpretation. Failure of either of the two test subjects to acknowledge recognition of the EOSTI alarm signal within the time period specified in Section 7.10 shall constitute failing performance.

8.11 HUD Wiring Connection Strength Test.

8.11.1 Application. This test method shall apply to SCBA facepieces with HUD and any associated assemblies with interconnecting wiring.

8.11.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.11.3 Specimen Preparation.

8.11.3.1 Specimens for conditioning shall be SCBA facepieces with HUD and any associated assemblies with interconnecting wiring.

8.11.3.2 Prior to testing, specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, ± 3 °C (72°F, ± 5 °F) and RH of 50 percent, ± 25 percent.

8.11.4 Apparatus. A mass of known weight with the means for attachment to wiring shall be provided.

8.11.5 Procedure. A force of 156 N, ± 9 N (35 lbf, ± 2 lbf) shall be applied gradually, in an axial direction, to the wiring of the specimen being tested.

8.11.6 Report. Observations of the HUD functionality shall be recorded and reported.

8.11.7 Interpretation. Observation of HUD functionality in accordance with 6.3.5 shall be used to determine pass or fail performance.

8.12 HUD Low Power Source Alert Signal Test.

8.12.1 Application. This test shall apply to all HUD low power source alert signals.

8.12.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.12.3 Specimen Preparation. Specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, ± 3 °C (72°F, ± 5 °F) and RH of 50 percent, ± 25 percent.

8.12.4 Apparatus. A variable power source that is capable of supplying DC voltage of at least 30 percent more than the nominal power source voltage shall be provided.

8.12.5 Procedure.

8.12.5.1 Each HUD shall be tested with a variable power source to determine that the low power source alert signal will activate at the voltage ± 3 percent that is specified by the manufacturer.

8.12.5.2 Each HUD shall be tested with a variable power source to determine that the HUD will continue to provide the visual information and alert signals down to the cease-proper-operation voltage ± 3 percent that is specified by the manufacturer.

8.12.5.3 Each HUD power source shall be tested by discharging it at the nominal operating current specified by the manufacturer until the voltage falls to the level at which the HUD low power source alert signal activates as specified in 6.3.8.4.

8.12.5.4 Upon reaching that voltage, the current drain shall be increased to the peak current drain of the power source specified by the manufacturer for all systems supplied by that power source. Under those conditions and for a period of at least 2 hours, the power source voltage shall remain above the voltage that would cause the HUD to cease proper operation.

8.12.6 Report.

8.12.6.1 The HUD shall be observed for activation of the low power source alert signal.

8.12.6.2 The HUD shall be observed for the display of the visual information and alert signals down to the cease-proper-operation voltage.

8.12.6.3 The power source voltage shall be observed with respect to the cease-proper-operation voltage.

8.12.6.4 The events in 8.12.6.1 through 8.12.6.3 shall be recorded and reported.

8.12.7 Interpretation.

8.12.7.1 The HUD low power source alert signal function shall be evaluated to determine pass or fail performance.

8.12.7.2 The HUD power source voltage greater than or equal to the cease-proper-operation voltage shall constitute pass.

8.13 HUD Visibility Tests.

8.13.1 Darkness Test.

8.13.1.1 Application. This test method shall apply to complete SCBA.

8.13.1.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.13.1.3 Specimen Preparation. Prior to testing, specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.13.1.4 Apparatus.

8.13.1.4.1 The SCBA breathing air pressure vessel shall be permitted to be replaced with a breathing air pressure vessel of lesser capacity. The breathing air capacity of the replacement breathing air pressure vessel shall be greater than 200 L (7.1 ft³).

8.13.1.4.2 Testing shall be performed in a light-controlled enclosure designated as the "testing enclosure." A diffused-light source that provides a luminance of 2 lux, ±1 lux shall be used to illuminate across the surface of the SCBA facepiece lens.

8.13.1.5 Procedure.

8.13.1.5.1 The selected test subjects shall have visual acuity of 20/20 in each eye uncorrected or corrected with contact lenses. Selected test subjects shall be able to read lowercase letters measuring 2.5 mm ($\frac{3}{32}$ in.) in height at a distance of 305 mm (12 in.).

8.13.1.5.2 The test subject shall don a complete SCBA.

8.13.1.5.3 The test subject shall enter the testing enclosure and be positioned so that the SCBA facepiece is illuminated as specified in 8.13.1.4.2.

8.13.1.5.4 The test subject shall wait 1 minute to allow the eyes to acclimate to the illumination.

8.13.1.5.5 The SCBA shall be activated so as to activate the HUD.

8.13.1.5.6 The breathing air pressure vessel shall be fully charged, and the HUD shall show full breathing air pressure vessel charge.

8.13.1.5.7 The SCBA pressure shall be slowly decreased so as to activate all HUD visual displays.

8.13.1.6 Report.

8.13.1.6.1 Each visual display of information and each visual alert signal as defined by the manufacturer's instructions shall be observed for distinctness and identifiability.

8.13.1.6.2 The test subject's observations of distinctness and identifiability shall be recorded and reported.

8.13.1.7 Interpretation.

8.13.1.7.1 The test subject's ability to distinguish between each visual display of information and each visual alert signal as defined by the manufacturer's instructions shall be observed, and the distinguishing features shall be distinct and identifiable.

8.13.1.7.2 Failure of the test subject to be able to observe each visual display of information and each visual alert signal as distinct, identifiable, or both shall constitute failing performance.

8.14 Light Test.

8.14.1 Application. This test method shall apply to complete SCBA.

8.14.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.14.3 Specimen Preparation. Prior to testing, specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.14.4 Apparatus.

8.14.4.1 The SCBA breathing air pressure vessel shall be permitted to be replaced with a breathing air pressure vessel of lesser capacity. The breathing air capacity of the replacement breathing air pressure vessel shall be greater than 200 L (7.1 ft³).

8.14.4.2 Testing shall be performed in a light-controlled enclosure designated as the "testing enclosure." A diffused light source that provides a luminance of 10,000 lux, ±1000 lux shall be used to illuminate across the surface of the SCBA facepiece lens.

8.14.5 Procedure.

8.14.5.1 The selected test subjects shall have visual acuity of 20/20 in each eye uncorrected or corrected with contact lenses. Selected test subjects shall be able to read lowercase letters measuring 2.5 mm ($\frac{3}{32}$ in.) in height at a distance of 305 mm (12 in.).

8.14.5.2 The test subject shall don a complete SCBA.

8.14.5.3 The test subject shall enter the testing enclosure and be positioned so that the SCBA facepiece is illuminated as specified in 8.14.4.2.

8.14.5.4 The test subject shall wait 1 minute to allow the eyes to acclimate to the illumination.

8.14.5.5 The SCBA shall be activated so as to activate the HUD.

8.14.5.6 The breathing air pressure vessel shall be fully charged, and the HUD shall show full breathing air pressure vessel charge.

8.14.5.7 The SCBA pressure shall be slowly decreased so as to activate all HUD visual displays.

8.14.6 Report.

8.14.6.1 Each visual display of information and each visual alert signal as defined by the manufacturer's instructions shall be observed and shall be distinct and identifiable.

8.14.6.2 The test subject's observations shall be recorded and reported.

8.14.7 Interpretation. The test subject's ability to distinguish among the visual displays of information and the visual alert signals as defined by the manufacturer's instructions shall be observed, and distinguishing features shall be distinct and identifiable.

8.15 HUD Disabling Glare Test.

8.15.1 Application. This test method shall apply to complete SCBA.

8.15.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.15.3 Specimen Preparation. Prior to testing, test specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.15.4 Apparatus.

8.15.4.1 Testing shall be performed in a light-controlled enclosure designated as the "testing enclosure," with a diffused light source that provides a luminance of 2 lux, +0/-1 lux measured at the surface of the reading text card.

8.15.4.2 At least eight text cards for reading shall be provided. Each text card shall have 10 different randomly selected letters of 2.5 mm ($\frac{3}{32}$ in.) in height printed in lowercase on the card.

8.15.4.3 The SCBA breathing air pressure vessel shall be permitted to be replaced with a breathing air pressure vessel of lesser capacity. The breathing air capacity of the replacement breathing air pressure vessel shall be greater than 200 L (7.1 ft³).

8.15.5 Procedure.

8.15.5.1 The selected test subjects shall have visual acuity of 20/20 in each eye uncorrected or corrected with contact lenses. Selected test subjects shall be able to read lowercase letters measuring 2.5 mm ($\frac{3}{32}$ in.) in height at a distance of 305 mm (12 in.).

8.15.5.2 The test subject shall enter the testing enclosure that is illuminated as specified in 8.15.4.1.

8.15.5.3 The test subject shall wait at least 1 minute to allow the eyes to acclimate to the illumination.

8.15.5.4 A text card as specified in 8.15.4.2 shall be used for each before-reading procedure and for each after-reading procedure of a single test.

8.15.5.5 Different text cards as specified in 8.15.4.2 shall be used for each test.

8.15.5.6 With the test subject's vision blocked, the text card shall be placed in a fixed position inside the testing enclosure at a distance of 305 mm, +0/-25 mm (12 in., +0/-1 in.) from the test subject's face.

8.15.5.7 For the before-reading portion of the test procedure, the test subject shall read out loud the 10 letters on the text card.

8.15.5.8 The test subject shall then don a complete SCBA.

8.15.5.9 The SCBA shall be activated so as to activate the HUD.

8.15.5.10 With the test subject's vision blocked, a different text card shall be placed in a fixed position inside the testing enclosure at a distance of 305 mm, +0/-25 mm (12 in., +0/-1 in.) from the test subject's SCBA facepiece lens.

8.15.5.11 The SCBA breathing air pressure vessel pressure shall then be slowly decreased until the breathing air supply in the breathing air pressure vessel is exhausted.

8.15.5.12 The after-reading portion of the test procedure shall be conducted while the breathing air pressure vessel pressure is being slowly decreased. The test subject shall read out loud the 10 letters on the text card.

8.15.6 Report.

8.15.6.1 The test subject's visual acuity as required in 8.15.5.1 shall be recorded and reported.

8.15.6.2 The test subject's ability to read the lowercase letters as required in 8.15.5.1 shall be recorded and reported.

8.15.6.3 The test subject's reading of the 10 letters in the before-reading portion of the test as required in 8.15.5.7 shall be recorded and reported for each letter.

8.15.6.4 The test subject's reading of the 10 letters in the after-reading portion of the test as required in 8.15.5.12 shall be recorded and reported for each letter.

8.15.7 Interpretation.

8.15.7.1 The test subject's inability to read at least 9 of the 10 before-reading letters shall constitute failing performance.

8.15.7.2 The test subject's inability to read at least 9 of the 10 after-reading letters shall constitute failing performance.

8.16 Breathing Air Pressure Vessel Refill Breathing Performance Test.

8.16.1 Application. Where the SCBA is equipped with an RIC UAC, this test method shall apply to complete SCBA.

8.16.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.16.3 Specimen Preparation. Prior to testing, test specimens shall be conditioned for a minimum of 4 hours at an ambient

temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.16.4 Apparatus.

8.16.4.1 The test apparatus shall be as specified in 8.1.4.

8.16.4.2 An RIC UAC filling hose assembly shall be provided.

8.16.4.3 The breathing air source shall provide a constant pressure equal to the rated service pressure of the SCBA breathing air pressure vessel, +0/-6.8 bar (+0/-100 psi).

8.16.5 Procedure.

8.16.5.1 The SCBA shall be tested for airflow performance as specified in 8.1.5, with the modification that the test will begin with the SCBA breathing air pressure vessel pressurized to 25 percent of the rated pressure.

8.16.5.2 The RIC UAC filling hose shall be connected to the constant pressure source.

8.16.5.3 At 10 cycles, ±5 cycles of the breathing machine, the RIC UAC female fitting on the RIC filling hose shall be connected to the RIC UAC male fitting on the SCBA. The RIC UAC coupling shall remain connected until the air transfer is completed.

8.16.5.4 The duration of the airflow performance test shall end 4 minutes after the air transfer has commenced in accordance with 8.16.5.3.

8.16.6 Report. The facepiece peak inhalation and exhalation pressure shall be recorded and reported.

8.16.7 Interpretation. The peak inhalation and peak exhalation pressures shall be used to determine pass or fail performance.

8.17 RIC UAC System Fill Rate Test.

8.17.1 Application. Where the SCBA is equipped with an RIC UAC, this test method shall apply to complete SCBA.

8.17.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.17.3 Specimen Preparation. Prior to testing, the specimens shall be conditioned for a minimum of 4 hours at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.17.4 Apparatus.

8.17.4.1 An RIC UAC filling hose assembly shall be provided.

8.17.4.2 The air source shall provide a constant pressure equal to the rated service pressure of the SCBA breathing air pressure vessel, +0/-6.8 bar (+0/-100 psi).

8.17.4.3 Testing shall be performed using a timer capable of measuring elapsed time within the range of 0 to 5 minutes.

8.17.5 Procedure.

8.17.5.1 The pressure of the SCBA breathing air pressure vessel shall be 0 bar (0 psi).

8.17.5.2 The RIC UAC filling hose shall be connected to the constant pressure air source.

8.17.5.3 With the SCBA breathing air pressure vessel valve fully open, the RIC UAC filling hose shall be connected to the RIC UAC male fitting.

8.17.5.4 The test timer shall begin when the RIC UAC filling hose is connected to the SCBA.

8.17.5.5 The pressure in the SCBA breathing air pressure vessel shall be monitored.

8.17.5.6 When the pressure in the SCBA breathing air pressure vessel reaches 75 percent of the rated service pressure of the SCBA breathing air pressure vessel, the test timer shall be stopped.

8.17.6 Report. The elapsed time shall be observed, recorded, and reported.

8.17.7 Interpretation. The elapsed fill time shall be used to determine pass or fail.

8.18 Breathing Air Pressure Vessel and Valve Assembly Retention Test.

8.18.1 Application. This test method shall apply to complete SCBA assemblies.

8.18.2 Samples.

8.18.2.1 Samples shall be complete SCBA.

8.18.2.2 Samples shall be fitted with each of the SCBA manufacturer's breathing air pressure vessel and valve assemblies.

8.18.3 Specimen Preparation.

8.18.3.1 One SCBA sample shall be tested with a breathing air pressure vessel and valve assembly as specified in 8.22.5.

8.18.3.2 Prior to testing, specimens shall be conditioned for a minimum of 4 hours at an ambient temperature of 22°C, ±3°C (72°F, ±5°F), with RH of 50 percent, ±25 percent.

8.18.4 Apparatus.

8.18.4.1 A test bench or similar fixture that can firmly fix a fully assembled SCBA to the test bench or fixture and that will not allow movement of the SCBA shall be used.

8.18.4.2 Measurements shall be taken with a calibrated measuring device having a resolution of better than ±0.25 mm (±0.010 in.).

8.18.4.3 Loops, straps, or pads shall be positioned on the valve to facilitate the application and measurement of an applied load to the intersection of the valve connection plane with the center line of the breathing air pressure vessel body.

8.18.5 Procedure.

8.18.5.1 The specimen fitted with the SCBA manufacturer's breathing air pressure vessel and valve assembly shall be fixed to the backframe/carrier assembly in accordance with the manufacturer's end user instructions provided with the SCBA.

8.18.5.2 The fully assembled SCBA shall be firmly fixed to the test bench or fixture in a manner that prevents movement of the SCBA but that does not interfere with the breathing air pressure vessel and valve assembly retention method.

8.18.5.3 The distances for each of the six directions specified in 8.18.5.4, the original starting positions, shall be measured and recorded.

8.18.5.4 A force of 200 N (45 lbf) shall be applied to the intersection point specified in 8.18.4.3, in the six directions shown in Figure 8.18.5.4. The force shall be applied for a period of 10 seconds, $\pm 5/-0$ seconds, allowing the measurements to be taken.

8.18.5.5 Following the application of force for each direction, the distance for each of the six directions shall be measured and recorded.

8.18.6 Report.

8.18.6.1 The distance moved from the original starting position for each of the six directions shall be recorded and reported.

8.18.6.2 No portion of the breathing air pressure vessel and valve assembly shall show movement greater than 25 mm (1 in.) from its original position prior to load application.

8.18.7 Interpretation. Movement of any part of the breathing air pressure vessel and valve assembly that exceeds 25 mm (1 in.) shall constitute failing performance.

8.19 Immersion Leakage Test.

8.19.1 Application. This test method shall apply to each electronic device of the SCBA required to meet the mandatory design requirements of Chapter 6.

8.19.2 Samples.

8.19.2.1 The sample to be tested shall be as specified in 4.3.9.

8.19.2.2 Samples for conditioning shall be complete SCBA.

8.19.3 Specimens.

8.19.3.1 Prior to testing, specimens shall be conditioned for a minimum of 4 hours at an ambient temperature of 22°C , $\pm 3^{\circ}\text{C}$ (72°F , $\pm 5^{\circ}\text{F}$) and RH of 50 percent, ± 25 percent.

8.19.4 Apparatus.

8.19.4.1 The test water container shall be capable of covering the uppermost point of the specimen SCBA with a depth of 1.5 m (4.9 ft) of water.

8.19.4.2 The water temperature shall be 18°C , $\pm 10^{\circ}\text{C}$ (64°F , $\pm 18^{\circ}\text{F}$).

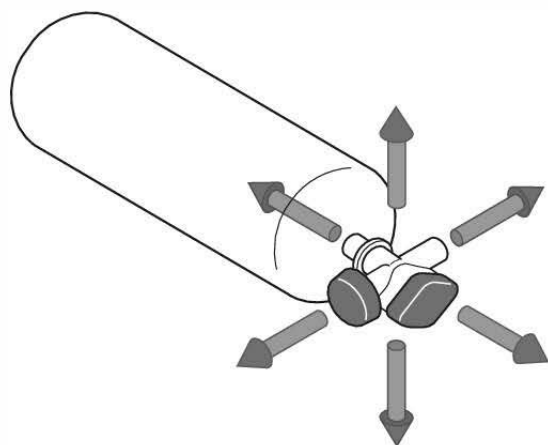


FIGURE 8.18.5.4 Directions of Force Applied for Retention Testing.

8.19.5 Procedure.

8.19.5.1 The SCBA shall be mounted on the test mannequin and tested for a watertight seal in accordance with 8.1.5.3.

8.19.5.2 The specimen mounted to the mannequin shall be immersed in the test water container for 15 minutes. After 15 minutes, the specimen shall be removed from the test water container and shall be wiped dry. Testing shall begin within 30 seconds of removal from conditioning.

8.19.5.3 The specimen's electronic components shall be operated in accordance with the manufacturer's instructions for normal use to determine the proper functioning.

8.19.5.4 The specimen shall then be re-immersed in the test water container for an additional 5 minutes. The power source compartment(s) shall be open, and the power source shall not be installed.

8.19.5.5 After the 5-minute immersion, the specimen shall be removed from the test water container and shall be wiped dry.

8.19.5.6 The electronic compartment(s) of the specimen shall be opened and inspected for water leakage to determine pass or fail.

8.20 Breathing Air Pressure Vessel Connections and Accessibility Test.

8.20.1 Application. This test method shall apply to complete SCBA assemblies.

8.20.2 Samples.

8.20.2.1 Samples shall be complete SCBA.

8.20.2.2 Samples shall be fitted with each of the SCBA manufacturer's breathing air pressure vessel and valve assemblies.

8.20.3 Specimen Preparation.

8.20.3.1 The SCBA manufacturer's breathing air pressure vessel and valve assembly shall be fixed to the backframe/carrier according to the manufacturer's end user instructions.

8.20.3.2 Prior to testing, specimens shall be conditioned for a minimum of 4 hours at an ambient temperature of 22°C , $\pm 3^{\circ}\text{C}$ (72°F , $\pm 5^{\circ}\text{F}$), with RH of 50 percent, ± 25 percent.

8.20.4 Procedure.

8.20.4.1 The specimen fitted with each of the SCBA manufacturer's breathing air pressure vessel and valve assemblies shall be fixed to the backframe/carrier assembly in accordance with the manufacturer's end user instructions provided with the SCBA.

8.20.4.2 Specimens shall be evaluated for accessibility, attachment, and detachment by a test subject with a hand that is categorized as large, and the test subject shall perform the test while wearing a size large glove that is compliant with NFPA 1990, Class 1.

8.20.4.3 The test subject shall fully attach the breathing air pressure vessel and valve assembly to the SCBA and then fully detach the breathing air pressure vessel and valve assembly from the SCBA. The time in seconds to attach and then to detach the breathing air pressure vessel and valve assembly shall be measured.

8.20.4.4 The test subject shall fully attach the breathing air fill hose to the RIC UAC connection and then fully detach the breathing air fill hose from the RIC UAC connection. The time in seconds to attach and then to detach the breathing air fill hose shall be measured.

8.20.5 Report.

8.20.5.1 The time to fully attach and to fully detach the breathing air pressure vessel and valve assemblies, timed in accordance with 8.20.4.3, shall be recorded and reported.

8.20.5.2 The time to fully attach and to fully detach the breathing air fill hose to and from the RIC UAC connection, timed in accordance with 8.20.4.4, shall be recorded and reported.

8.20.6 Interpretation.

8.20.6.1 One or more specimens failing the attachment and detachment times for the breathing air pressure vessel and valve assemblies shall constitute failing performance.

8.20.6.2 One or more specimens failing the attachment and detachment times for the RIC UAC connection shall constitute failing performance.

8.21 Supplementary Voice Communications System Performance Test.

8.21.1 Application. This test method shall apply to complete SCBA facepiece(s) and second stage regulator(s).

8.21.2 Samples. Each sample to be tested shall be as specified in 4.3.9, with voice communications systems installed and in the "on" mode in accordance with the manufacturer's instructions.

8.21.3 Specimen Preparation.

8.21.3.1 Prior to testing, specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.21.3.2 Specimens for conditioning shall be complete medium-size SCBA facepiece(s) and inner mask(s) with the second stage regulator(s) installed in the "as worn" position as specified by the manufacturer.

8.21.3.3 Signal processing options that use specific features of natural speech such as, but not limited to, pitch, format analysis, and voice or non-voiced sound to enhance the speech intelligibility or the usability of supplementary voice communications systems shall be disabled during the STI test.

8.21.4 Apparatus.

8.21.4.1 Testing shall be conducted in a chamber having the following characteristics:

- (1) Minimum room dimensions: 4.6 m long × 3.1 m wide × 2.7 m high (15 ft long × 10 ft wide × 9 ft high)
- (2) Construction: hemi-anechoic
- (3) Ambient noise level inside chamber: NC-25
- (4) Walls and ceiling: ≥90 percent absorptive for 100 Hz < f < 10000 Hz

8.21.4.1.1 All surfaces above the floor shall be acoustically treated for internal acoustic absorption, as well as for external noise mitigation.

8.21.4.2 A G.R.A.S. KEMAR Head and Torso Simulator (HATS) model 45BM shall be used for testing.

8.21.4.2.1 The mouth simulator shall be capable of producing 112 dB/1 kHz sine tone at 25 mm (1 in.) with the mouth reference point (MRP) unequalized, and the total harmonic distortion (THD) shall be ≤3 percent.

8.21.4.2.2 The mouth simulator frequency response shall be able to be equalized flat ±1 dB between 100 Hz and 10 kHz, and the response shall be -15 dB or less at 100 Hz and -20 dB or less at 15 kHz.

8.21.4.3 The sound pressure level (SPL) meter having the following characteristics shall be used:

- (1) The SPL meter shall be capable of applying an equivalent continuous sound pressure level (Leq) using an A-weighted filter.
- (2) The SPL meter shall have a dynamic range from 30 dB (or less) to 130 dB (or more).
- (3) The SPL meter shall display the measurement to at least one decimal place.

8.21.4.4 The signal/pink noise analog audio signal generators having the characteristics described in 8.21.4.4.1 and 8.21.4.4.2 shall be used.

8.21.4.4.1 One generator shall be capable of playing wave files in the following format: 48 kHz, 16-bit mono at the output level of 0 dB, FS = 18 dBu, according to EBU Technical Recommendation R68, *Alignment level in digital audio production equipment and in digital audio recorders*.

8.21.4.4.2 The second generator shall be capable of generating pink noise and sine waves from -80 dBu to -2 dBu in one-digit steps, with a THD+N of -90 dB (0.0032 percent) at 8 dBu noise floor type 25uv, and shall also have the following characteristics:

- (1) A frequency range of 10 Hz to 20 kHz in one-digit steps ±0.01 percent
- (2) An amplitude accuracy of within ±0.5 dB or less

8.21.4.5 A digital equalizer having the following characteristics shall be used:

- (1) A digital equalizer shall be capable of at least two concurrently selectable equalizer sections:
 - (a) One 31-band graphic with an adjustment range of at least ±18 dB
 - (b) A 10-band parametric with an adjustment range of at least ±18 dB
- (2) The digital equalizer shall have a dynamic range of ≥112 dB.
- (3) The digital equalizer shall be capable of equalizing the frequency response of the HATS mannequin of ±1 dB flat between 100 Hz and 10 kHz, applying a 180 Hz high pass filter with a slope of -24 dB octave, and a 10 Hz low pass filter with a slope of -24 dB octave (-15 dB at 100 Hz, -20 dB at 15 kHz).

8.21.4.6 A powered speaker having the following characteristics shall be used:

- (1) The sensitivity shall be ≥84 dB at 1 watt at 1 meter.
- (2) The frequency response shall be rated at ≤80 Hz to ≤13 kHz.
- (3) The amplifier shall deliver ≥10 watts with a total harmonic distortion <1 percent.

8.21.4.7 A microphone having the following characteristics shall be used:

- (1) The microphone shall be a condenser type.
- (2) The microphone polar pattern shall be omnidirectional.
- (3) The frequency response shall be flat ± 0.5 dB from 100 Hz to 15 kHz.
- (4) The residual noise shall be ≤ -30 dB.
- (5) The microphone shall accept signals of at least 130 dBA.

8.21.4.8 A speech transmission index (STI) analyzer having the following characteristics shall be used:

- (1) The STI PA analyzer shall be capable of measuring and displaying a single value STI PA result to two decimal places with a seven octave band modulated noise test signal using the Netherlands Organization for Applied Scientific Research (TNO) verified algorithm.
- (2) The STI PA analyzer shall conform to IEC-60268, *Sound System Equipment—Part 16: Objective Rating of Speech Intelligibility by Speech Transmission Index*.

8.21.4.9 All the apparatus identified in 8.7.4.6 and 8.7.4.7 shall be located in the hemi-anechoic chamber and arranged as shown in Figure 8.7.4.9(a) and Figure 8.7.4.9(b).

8.21.4.10 The HATS test mannequin shall be positioned in the chamber as shown in Figure 8.7.4.9(a) and Figure 8.7.4.9(b).

8.21.4.10.1 The distance between the HATS test mannequin and the microphone shall be 1.5 m, $+25$ mm/ -0 mm (5 ft, $+1$ in./ -0 in.), and they shall be facing each other.

8.21.4.10.2 The distance between the HATS test mannequin MRP and the floor shall be 1.5 m, $+25$ mm/ -0 mm (5 ft, $+1$ in./ -0 in.).

8.21.4.10.3 The distance between the microphone and the floor shall be 1.5 m, $+25$ mm/ -0 mm (5 ft, $+1$ in./ -0 in.).

8.21.4.11 The test chamber shall be filled with broadband pink noise with a tolerance of ± 1 dB per octave band from 100 Hz to 10 kHz.

8.21.4.12 The pink noise speaker shall be placed directly beneath the microphone and oriented such that the central axis of the speaker cone is directly facing the microphone.

8.21.4.12.1 The speaker shall be situated on top of a block of isolating acoustic foam such that no part of the speaker box is contacting the floor or the microphone stand, to prevent conduction of sound to the microphone.

8.21.4.12.2* The height of the speaker off the floor shall be at least 0.125 m (5 in.), as measured from the bottom of the speaker box, and the distance between the speaker and microphone shall be no less than 1 m (40 in.), as measured from the top of the speaker grille/enclosure.

8.21.4.12.3 The pink noise speaker shall be placed as indicated in Figure 8.7.4.12.3.

8.21.4.13 The pink noise speaker shall be fully equalized flat, from 100 Hz to 10 kHz, to within ± 1 dB on a relative scale in $\frac{1}{3}$ octave bands, as measured at the microphone position.

8.21.4.14 The STI test signal from the mannequin shall be adjusted to achieve an A-weighted sound level of 97 dB, ± 0.5 dB at the MRP, 50 mm, ± 3 mm (2 in. $\pm \frac{1}{8}$ in.) from the test mannequin's mouth.

8.21.4.14.1 The microphone used for calibrating the STI signal shall be omnidirectional and oriented in a horizontal front-facing manner.

8.21.4.14.2 The STI signal shall be equalized flat to within ± 1 dB on a relative scale in $\frac{1}{3}$ octave bands, as measured at the MRP of the HATS.

8.21.4.14.3 The HATS shall be calibrated as follows:

- (1) Equalize flat with pink noise to 97 dBA from 100 Hz – 10 kHz to ± 1 dB on a $\frac{1}{3}$ octave scale.
- (2) Reduce the levels for the 125 Hz octave band (the 100, 125, 160 $\frac{1}{3}$ octave bands) by 10 dB.
- (3) Reduce the levels for the 250 Hz octave band (the 200, 250, 315 $\frac{1}{3}$ octave bands) by 2 dB.
- (4) Apply the STI PA signal and adjust the Sound Pressure Level (SPL) to 97 dBA, ± 0.5 dBA.

8.21.4.15 The gain of the powered speaker amplifier used to generate the pink noise shall be adjusted to achieve an A-weighted sound level of 9 dB, ± 0.5 dB below the signal level generated as identified in 8.21.4.14, measured at the microphone placed as identified in 8.21.4.10.1 and 8.21.4.10.3.

8.21.5 Procedure.

8.21.5.1 The method for measuring the STI shall be as specified in IEC 60268, *Sound System Equipment — Part 16: Objective Rating of Speech Intelligibility by Speech Transmission Index*, with the modified apparatus specified in 8.21.4.

8.21.5.2 The medium-size facepiece with inner mask and second stage regulator in the normal use mode shall be fitted to the HATS test mannequin in the following manner:

- (1) Place the chin of the mannequin in the chin cup of the facepiece.
- (2) Place the facepiece to seal against the face of the HATS test mannequin.
- (3) Pass the head harness of the facepiece over the HATS test mannequin and tighten it in a manner that maintains the symmetry of the facepiece on the HATS test mannequin, using talc to minimize friction between the HATS test mannequin and the strap.
- (4) Tighten the straps to a tension of 50 N (11.2 lbf).

8.21.5.3 Three medium-size facepieces shall be tested in the chamber having an ambient noise field as specified in 8.21.4.11 through 8.21.4.15. Each facepiece shall be mounted as specified in 8.21.5.2 and then tested as follows:

- (1) Record three separate measurements for each donning of the facepiece.
- (2) Perform five separate donnings.
- (3) Record a total of 45 measurements: 3 (facepieces) $\times$ 3 (measurements) $\times$ 5 (donnings) = 45 measurements.

8.21.6 Report.

8.21.6.1 The STI PA signal sound pressure level (SPL) per octave band, the modulation transfer index per octave band, and overall STI score at the mouth reference point (MRP) (see 3.3.30) shall be recorded and reported.

8.21.6.2 The STI PA signal SPL per octave band, the modulation transfer index per octave band, and overall STI score at the microphone measurement point (MMP) (see 3.3.29) shall be recorded and reported.

8.21.6.3 The pink noise SPL per octave band at the MMP (*see* 3.3.29) shall be recorded and reported.

8.21.6.4 The STI score for each facepiece measurement sampled as described in 8.21.5.3 (a total of 45 scores) shall be recorded and reported, and the starting time of each facepiece donning shall be recorded.

8.21.6.5 The average for each donning shall be calculated, recorded, and reported. There shall be a total of 15 averages of 3 measurements (5 averages for each of the three facepiece samples). See Figure 8.7.6.5.

8.21.7 Interpretation.

8.21.7.1 The averages calculated in 8.21.6.5 shall be used to determine a pass or fail in accordance with Section 7.14.

8.21.7.2 If any of the 15 averages have achieved a score less than the minimum threshold specified in Section 7.14, the facepiece shall be considered to have failed and shall be reported as such.

8.21.7.3 If all 15 averages have achieved scores equal to or greater than the minimum threshold specified in Section 7.14, the facepiece shall be considered to have passed and shall be reported as such.

8.22 Low Power Capacity Test.

8.22.1 Application. This test shall apply to all electronic devices required for SCBA by the requirements of Chapter 6.

8.22.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.22.3 Specimen Preparation. Specimens shall be conditioned for a minimum of 4 hours and tested at an ambient temperature of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent.

8.22.4 Apparatus. A DC electric load tester capable of regulating a current draw of the SCBA battery, in conjunction with a DC voltmeter, shall be provided.

8.22.5 Procedure.

8.22.5.1 Each electronic device shall be tested with a variable power source to determine that the electronic device will continue to operate down to the cease-proper-operation voltage level or percent capacity remaining value specified by the manufacturer.

8.22.5.2 Where multiple electronic devices that are part of the SCBA share a common power source, the minimum amount of power that causes the activation of the low power source alert signal shall be determined with all electronics sharing the common power source operating at their respective maximum power consumption under normal use.

8.22.5.2.1 Each electronic device power source shall be tested by discharging it at the cumulative nominal operating current for all electronic devices utilizing the power source, as specified by the manufacturer, until the voltage falls to the level at which the electronic device low power source alert signal illuminates as specified in Section 7.16.

8.22.5.2.2 Upon reaching this voltage, the current drain shall be increased to the cumulative peak current drain of all electronic devices utilizing the power source, as specified by the manufacturer. Under these conditions and for a period of at

least 2 hours, the power source voltage shall remain above the voltage that will cause the electronic device to cease proper operation.

8.22.6 Report.

8.22.6.1 The electronic device shall be observed for activation of the low power source alert signal.

8.22.6.2 The electronic device shall be observed for the display of the low power source alert signal down to the cease-proper-operation voltage level or percent capacity remaining value.

8.22.6.3 The power source voltage shall be observed with respect to the cease-proper-operation voltage level or percent capacity remaining value.

8.22.6.4 The events in 8.22.6.1 through 8.22.6.3 shall be recorded and reported.

8.22.7 Interpretation.

8.22.7.1 Electronic device low power source alert signal function shall be evaluated to determine pass or fail performance.

8.22.7.2 Electronic device power source voltage equal to or greater than the cease-proper-operation voltage level or percent capacity remaining value shall constitute passing performance.

8.23 Emergency Breathing Safety System (EBSS) Cold Temperature Performance Test.

8.23.1 Application. This test method shall apply to two complete SCBA.

8.23.2 Samples. Each sample to be tested shall be as specified in 4.3.9.

8.23.3 Specimen Preparation.

8.23.3.1 Specimens for conditioning shall be two complete SCBA.

8.23.3.2 Prior to testing, the SCBA shall be placed in an ambient environment of 22°C, ±3°C (72°F, ±5°F) and RH of 50 percent, ±25 percent for a minimum 12-hour dwell period.

8.23.3.3 The air used in the SCBA breathing air pressure vessels shall comply with the quality requirements of NFPA 1989.

8.23.4 Apparatus.

8.23.4.1 The SCBA shall be placed in an environmental chamber and positioned to simulate the normal wearing position of the SCBA on a person as specified by the manufacturer.

8.23.4.2 During the cold temperature exposures, the SCBA shall be mounted on a Scott Aviation Model No. 803608-01 or 803608-02 test headform or equivalent.

8.23.4.3 The thermocouple or other temperature-sensing element used shall be mounted within the chamber in a manner in which it will be exposed directly to the chamber atmosphere.

8.23.4.4 Two test headforms shall be connected to two breathing machines specified in Section 8.1.

8.23.4.5 The breathing machines shall be permitted to be located either inside or outside the environmental chamber.

8.23.5 Procedure.

8.23.5.1 The variation in pressure extremes caused by the cold temperature performance test configuration shall be determined as specified in 8.23.5.1.1 and 8.23.5.1.2.

8.23.5.1.1 For the receiving SCBA, the airflow performance test, as specified in Section 8.1, shall be carried out using the configuration specified in 8.2.4, with a breathing frequency set at 31, +1/−0 inhalation/exhalation cycles per minute and a tidal volume set at 3.4 L, ±0.1 L. The difference in pressure between the two tests shall be calculated by subtracting the values obtained using the configuration defined in 8.2.4 from the values obtained using the configuration specified in Section 8.1.

8.23.5.1.2 For the donor SCBA, the airflow performance test, as specified in Section 8.1, shall be carried out using the configuration specified in 8.2.4, with a breathing frequency set at 29, +0/−1 inhalation/exhalation cycles per minute and a tidal volume set at 3.4 L, ±0.1 L. The difference in pressure between the two tests shall be calculated by subtracting the values obtained using the configuration defined in 8.2.4 from the values obtained using the configuration specified in Section 8.1.

8.23.5.2 For the receiving SCBA, the facepiece pressure during each entire test shall be read from the strip chart recorder and corrected by adding the value of the difference in pressure calculated in 8.23.5.1.1 to determine pass or fail, as specified in 7.2.1.1.

8.23.5.3 For the donor SCBA, the facepiece pressure during each entire test shall be read from the strip chart recorder and corrected by adding the value of the difference in pressure calculated in 8.23.5.1.2 to determine pass or fail as specified in 7.2.1.1.

8.23.5.4 The receiving and donor SCBA shall be cold soaked at the minimum operating temperature specified by the manufacturer for a minimum of 12 hours.

8.23.5.4.1 The receiving SCBA shall have a pressure of 7 bar, +0.6 bar/−0 bar (100 psi, +10 psi/−0 psi) for the cold soak.

8.23.5.5 The receiving SCBA shall then be tested for airflow performance as specified in Section 8.1, with a breathing frequency set at +1/−0 inhalation/exhalation cycles per minute with a tidal volume set at 3.4 L, ±0.1 L (115 oz, ±3.4 oz), with the chamber air temperature at the minimum operating temperature specified by the manufacturer +0 – 5°C (+0 – 10°F).

8.23.5.5.1 For the EBSS cold temperature performance test, the airflow performance test shall begin after five cycles of the breathing machine and shall continue to operate through at least 36 bar (520 psi) of the donor SCBA breathing air pressure vessel inlet pressure.

8.23.5.6 The donor SCBA shall then be tested for airflow performance as specified in Section 8.1, with a breathing frequency set at 29 +0/−1 inhalation/exhalation cycles per minute and a tidal volume set at 3.4 L, ±0.1 L (115 oz, ±3.4 oz), with the chamber air temperature at the minimum operating temperature specified by the manufacturer + 0 – 5°C (+ 0 – 10°F).

8.23.5.7 The minimum operating temperature specified by the manufacturer shall be −18°C (0°F) or colder.

8.23.6 Report.

8.23.6.1 The facepiece peak inhalation pressure and peak exhalation pressure shall be recorded and reported for each test condition.

8.23.6.2 The activation and operation of the donor SCBA EOSTI or the failure of the donor SCBA EOSTI to activate and operate shall be recorded and reported.

8.23.6.3 The activation and identification of the donor SCBA HUD visual alert signals shall be recorded and reported.

8.23.7 Interpretation.

8.23.7.1 The peak inhalation and peak exhalation shall be used to determine pass or fail performance for each test procedure.

8.23.7.2 One or more specimens failing this test shall constitute failing performance.

8.23.7.3 Failure of the donor SCBA EOSTI alarm signal to activate and remain active during the test shall constitute failing performance.

8.23.7.4 Failure of the donor SCBA HUD to display the breathing air pressure vessel content or to display the visual alert signal during the test shall constitute failing performance.

8.24 Optional Toxic Industrial Chemical Permeation Resistance Test.

8.24.1 Application. This test method shall apply to complete SCBA.

8.24.2 Samples. Samples shall be complete SCBA with textile and backframe removed as soon as possible to reduce contaminated disposal volumes.

8.24.3 Specimen Preparation. Prior to testing, specimens shall be conditioned at a temperature of 21°C, ±3°C (70°, ±5.4°F) and a relative humidity of 50 percent, ±25 percent.

8.24.4 Apparatus.

8.24.4.1 SCBA shall be tested within a chemical exposure chamber as shown in Figure 8.24.4.1 within a chemical hood. The chemical exposure chamber shall be as follows:

- (1) Constructed of a material with minimal chemical interaction with a list of challenge chemicals
- (2) Capable of exhausting a challenge chemical into the chemical hood
- (3) Adequately sized to allow the test headform and SCBA pneumatics to be exposed to challenge chemicals

8.24.4.2 The test headform shown in Figure 8.24.4.2 shall have the following characteristics:

- (1) Constructed of a material with minimal chemical interaction with a list of challenge chemicals at the test concentrations
- (2) Manufactured from grade 304 stainless steel to conform to the exterior dimensions specified in ISO 16900-1, *Respiratory protective devices — Methods of test and test equipment — Part 1: Determination of inward leakage*, for the 50th percentile
- (3) A 25 mm (1 in.) diameter breathing tube extending from the center of the lip area down and out the neck area



FIGURE 8.24.4.1 Example of a Chemical Exposure Chamber.

- (4) Leak-free sampling ports approximately 6 mm (¼ in.) in diameter located within the right ocular area and centered at the intranasal area
- (5) An optional 6 mm (¼ in.) diameter pressure probe shown in Figure 8.24.4.2 located within the opposite ocular area as the sampling port

8.24.4.3 The breathing machine used shall have the following characteristics:

- (1) The breathing waveform shall be sinusoidal.
- (2) Displacement and cam shall be adjusted for 1.6 L, ± 0.1 L tidal volume.

8.24.4.4 Chamber concentration sampling shall be capable of measuring the real-time concentration.

8.24.4.5 The chemical chamber conditioning system shall be capable of maintaining temperature at 27°C, $\pm 2^\circ\text{C}$ (80°F, $\pm 3.6^\circ\text{F}$).

8.24.4.6 An exterior Grade D or better air source for SCBA shall be introduced through the chamber wall at a pressure above the EOSTI setpoint.

8.24.5 General Procedures for Testing.

8.24.5.1 The breathing machine shall be verified at 12 L/min, ± 1 L/min.

8.24.5.2 SCBA facepieces shall be mounted on the headform in accordance with manufacturer instructions. In addition, the following shall be met:

- (1) If a shroud or other accessory is being tested as part of the respirator system, they shall be mounted properly and be serviceable.
- (2) Batteries shall be removed from the “PASS” device before testing begins.
- (3) EOSTI shall be disabled, if possible.

8.24.5.3 The SCBA facepiece seal shall be verified either via qualitative or quantitative means.

8.24.5.4 The CGA connection on SCBA shall be firmly attached, and the torque shall be verified using a calibrated torque wrench to exert the manufacturer-required foot-pounds of torque pressure.

8.24.5.5 While the SCBA is breathing, the chemical exposure chamber doors shall be shut and a 15-minute chemical background shall be collected from both the nasal and ocular regions.

8.24.6 Procedure for Gas Challenges.

8.24.6.1 Gas challenges specified in Table 7.18.1 shall be used. The general chamber schematic shall be as provided in Figure 8.24.6.1.

8.24.6.2 Chemical challenge shall be introduced into the chamber at 10,000 ppm, ± 1000 ppm.

8.24.6.3 The 1-hour challenge time shall begin upon reaching 5,000 ppm in the concentration of the respective test chemical.

8.24.6.4 Sampling pumps for nasal and ocular sampling shall provide continuous sampling over the entire test period.

8.24.6.5 After 60 ± 0 minutes of chemical challenge, sampling pumps shall be stopped and the chemical challenge chamber evacuated using the chemical challenge chamber exhaust system.

8.24.7 Procedure for Liquid Challenges.

8.24.7.1 Liquid challenges specified in Table 7.18.1 shall be used.

8.24.7.2 Chemical challenges shall be applied at a concentration of 20 g/m².

8.24.7.3 All surfaces containing breathing air that are outward facing in the as-worn configuration of the respirator shall have surface areas calculated based on geometric approximations to within 10 percent.

8.24.7.4 A low-pressure hand-held nebulizer as shown in Figure 8.24.7.4 shall be used to properly distribute the defined mass of chemical based upon the calculated surface area. Chemical overspray shall be accommodated for based upon pretest experimentation.

8.24.7.5 All outward-facing surfaces of the respirator shall be fully challenged within 5 minutes.

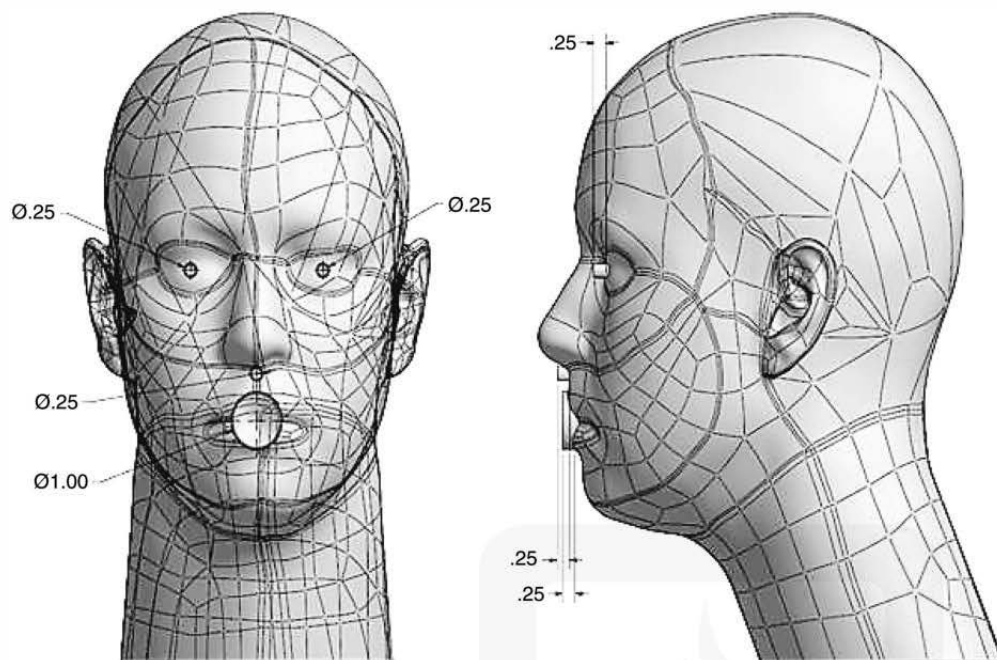


FIGURE 8.24.4.2 Test Headform.

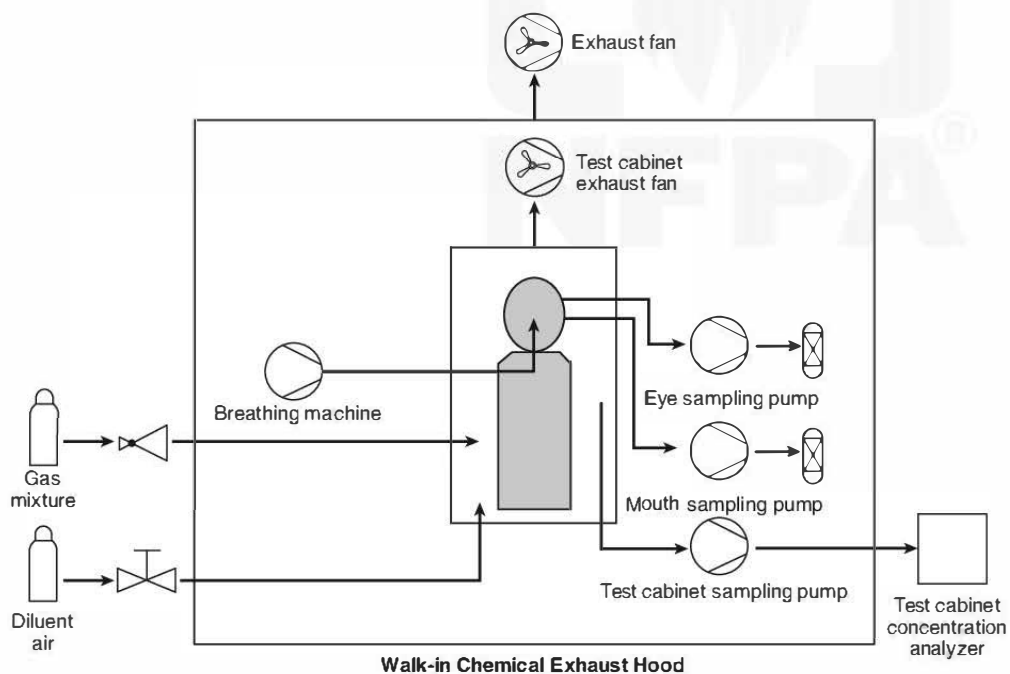


FIGURE 8.24.6.1 General Chamber Schematic.



FIGURE 8.24.7.4 Example of a Hand-Held Nebulizer.

8.24.7.6 Upon completion of the chemical spray, the chemical chamber enclosure shall be closed and the sampling pumps and breathing machine shall be activated.

8.24.7.7 After 60 +1/-0 minutes from the completion of the chemical challenge, sampling pumps shall be stopped and the chemical challenge chamber evacuated using the chemical challenge chamber exhaust system.

8.24.8 Procedure for Vapor Challenges.

8.24.8.1 Vapor challenges specified in Table 7.18.1 shall be used.

8.24.8.2 Chemical challenge shall be introduced via a gas breathing air pressure vessel or volatilization from a container within or into the chamber at 10,000, ±1000 ppm.

8.24.8.3 Upon reaching the minimum challenge concentration, the 1-hour challenge time shall begin.

8.24.8.4 Sampling pumps for nasal and ocular sampling shall provide continuous sampling over the entire test period.

8.24.8.5 After 60 +1/-0 minutes of chemical challenge, sampling pumps shall be stopped and the chemical challenge chamber evacuated using the chemical challenge chamber exhaust system.

8.24.9 Report. Total permeation for the ocular and nasal regions shall be recorded and reported in ppm for each specimen of SCBA and for each chemical tested.

8.24.10 Interpretation.

8.24.10.1 The concentration from both the ocular and nasal regions shall be used to determine pass or fail for each challenge type.

8.24.10.2 One or more specimens failing any test procedure for any chemical elected to be tested by the manufacturer shall constitute failing performance for that chemical.

Annex A Explanatory Material

Annex A is not a part of the requirements of this NFPA document but is included for informational purposes only. This annex contains explanatory material, numbered to correspond with the applicable text paragraphs.

A.1.1.1 The use of SCBA by emergency services personnel is always assumed to be in atmospheres immediately dangerous to life or health (IDLH). It could be difficult to predetermine hazardous conditions, concentrations of toxic materials, or percentages of oxygen in air; or under other emergency conditions, including but not limited to, rescue, hazardous materials response, tactical law enforcement operations, confined space entry, terrorist incident response, and similar operations; where oxygen deficiency, particulates, toxic products, products of combustion, or other IDLH atmospheres exist or could exist at the incident scene. Thus, SCBA are required at all times during emergency service operations in IDLH environments.

It could be difficult to predetermine hazardous conditions, concentrations of toxic materials, percentages of oxygen in air, or other emergency conditions (including but not limited to rescue, hazardous materials response, tactical law enforcement operations, confined space entry, terrorist incident response, and similar operations) where oxygen deficiency, particulates, toxic products, products of combustion, or other IDLH atmospheres exist or could exist at the incident scene.

A.1.1.5 Both NIOSH 42 CFR 84, "Approval of Respiratory Protective Devices," and NFPA 1986 require any accessory attached to an SCBA to be certified under both of those documents.

Emergency response organizations are cautioned that accessories are not part of the certified product but could be attached to a certified product by means not engineered, manufactured, or authorized by the certified product manufacturer.

Emergency response organizations are cautioned that if an accessory or its means of attachment causes the performance of the certified product to be compromised, the certified product might not be compliant with the standard with which it was originally certified as compliant. Additionally, if an accessory or the accessory's means of attachment are not designed and manufactured from suitable materials for the hazardous environments of emergency incidents, the failure of the accessory or of the means of attachment could cause injury to the user.

Where users desire an accessory that is not part of the certification of the SCBA, the user must contact the SCBA manufacturer to seek approval for the accessory.

Attachment of any accessory that is not approved and part of the certification of the SCBA will void the certification.

A.1.2.2 Although SCBA that meet this standard have been tested to more stringent requirements than required for NIOSH certification, there is no inherent guarantee against SCBA failure or emergency services personnel injury. Even the best-designed SCBA cannot compensate for abuse or the lack of a respirator training and maintenance program. The severity of these tests should not encourage or condone abuse of SCBA in the field.

The environmental tests utilized in this standard alone might not simulate actual field conditions, but they are devised to put extreme loads on SCBA in an accurate and reproducible

manner by test laboratories. However, the selection of the environmental tests was based on summary values derived from studies of conditions that relate to field use.

A.1.3.1.1 It is important to note that the duration of the SCBA air supply is dependent upon the volume of air in the breathing air pressure vessel and its rate of consumption, and that the use of an EBSS will reduce the duration of the air supply from the breathing air pressure vessel. In addition, it is strongly recommended that the AHJ develop standard operating procedures and training requirements to ensure that the EBSS is properly used.

A.1.3.6 Procedures for the use of SCBA and combination SCBA/SARs addressed by this standard should be determined by the authority having jurisdiction (AHJ).

A.3.2.1 Approved. The National Fire Protection Association does not approve, inspect, or certify any installations, procedures, equipment, or materials nor does it approve or evaluate testing laboratories. In determining the acceptability of installations or procedures, equipment, or materials, the "authority having jurisdiction" may base acceptance on compliance with NFPA or other appropriate standards. In the absence of such standards, said authority may require evidence of proper installation, procedure, or use. The "authority having jurisdiction" may also refer to the listings or labeling practices of an organization that is concerned with product evaluations and is thus in a position to determine compliance with appropriate standards for the current production of listed items.

A.3.2.2 Authority Having Jurisdiction (AHJ). The phrase "authority having jurisdiction," or its acronym AHJ, is used in NFPA standards in a broad manner because jurisdictions and approval agencies vary, as do their responsibilities. Where public safety is primary, the authority having jurisdiction may be a federal, state, local, or other regional department or individual such as a fire chief; fire marshal; chief of a fire prevention bureau, labor department, or health department; building official; electrical inspector; or others having statutory authority. For insurance purposes, an insurance inspection department, rating bureau, or other insurance company representative may be the authority having jurisdiction. In many circumstances, the property owner or his or her designated agent assumes the role of the authority having jurisdiction; at government installations, the commanding officer or departmental official may be the authority having jurisdiction.

A.3.2.4 Listed. The means for identifying listed equipment may vary for each organization concerned with product evaluation; some organizations do not recognize equipment as listed unless it is also labeled. The authority having jurisdiction should utilize the system employed by the listing organization to identify a listed product.

A.3.3.13 Combination SCBA/SAR. Combination SCBA/SARs consist of the following:

- (1) An SCBA certified as compliant with NFPA 1986 and having a minimum rated service life of 30 minutes
- (2) A connection for the attachment of an airline that provides a continuous supply of breathing air that is independent of the SCBA breathing air supply

The definition does not include SARs that are used in conjunction with escape self-contained breathing apparatus (ESCBAs) where the ESCBA provide less than a minimum rated service life of 30 minutes. For the purpose of this standard,

combination SCBA/SARs are encompassed by the terms *self-contained breathing apparatus* and SCBA.

A.3.3.16 Component. Components include items required for the design and construction of the product and are evaluated and tested as a part of the whole product.

A.3.3.17 Compressed Breathing Air. The quality of the compressed breathing air used in open-circuit SCBA has a direct effect on the performance of the equipment. It is therefore imperative that breathing air consistent with the design criteria established in this standard is used to ensure that the SCBA will continue to meet the performance criteria contained in this standard. It has been established through years of experience that breathing air that meets the requirements of NFPA 1989, which specifies a maximum moisture content of 24 ppm or drier [i.e., a dew point of -54°C (-65°F) or lower] and a maximum particulate level of 5 mg/m^3 air, will meet the needs of both emergency services personnel and the SCBA. (See also 8.1.3.3.)

A.3.3.42 NIOSH Certified. An SCBA being "NIOSH certified" is only one part of the certification process to NFPA 1986. SCBA that are only NIOSH certified are not compliant with NFPA 1986 and should not be construed as having certification as compliant with NFPA 1986. See Section 4.1 for further details. For the NIOSH certification to remain in effect, the SCBA must be used and maintained in the "as approved" condition.

NIOSH certification is conducted in accordance with the requirements of 42 CFR 84, Subpart H.

A.3.3.47 Product Label. The product label is not the certification organization's label, symbol, or identifying mark; however, the certification organization's label, symbol, or identifying mark can be attached to the product label or be part of it.

A.3.3.55 Self-Contained Breathing Apparatus (SCBA). For the purposes of this standard, where the term is used without a qualifier, it indicates only open-circuit self-contained breathing apparatus or combination SCBA/SARs. [See also 3.3.3, *Atmosphere-Supplying Respirator*; 3.3.13, *Combination SCBA/SAR*; and 3.3.63, *Supplied Air Respirator (SAR)*.]

A.3.3.63 Supplied Air Respirator (SAR). For the purposes of this standard, combination SCBA/SARs are encompassed by the terms *self-contained breathing apparatus* and SCBA.

A.4.2.1 The certification organization should have sufficient breadth of interest and activity so that the loss or award of a specific business contract would not be a determining factor in the financial well-being of the agency.

A.4.2.5 The contractual provisions covering certification programs should contain clauses advising the manufacturer that if requirements change, the product should be brought into compliance with the new requirements by a stated effective date through a compliance review program involving all currently listed products.

Without these clauses, certifiers would not be able to move quickly to protect their names, marks, or reputations. A product safety certification program would be deficient without these contractual provisions and the administrative means to back them up.

A.4.2.6 Investigative procedures are important elements of an effective and meaningful product safety certification program.

A preliminary review should be carried out on products submitted to the agency before any major testing is undertaken.

A.4.2.9 Such inspections should include, in most instances, witnessing of production tests. With certain products, the certification organization inspectors should select samples from the production line and submit them to the main laboratory for countercheck testing. With other products, it might be desirable to purchase samples in the open market for test purposes.

A.4.3 The testing facility should take suitable precautions to protect testing personnel and to guard against catastrophic failure that could result in a high-pressure gas release, fragmentation, and flying parts and debris. Catastrophic failure can occur, because many tests specified in Chapter 8 involve compressed gas breathing air pressure vessels containing high pressures, and the tests are rigorous in nature.

A.4.5.4 For example, this situation exists when a product is wholly manufactured and assembled by an entity or entities for another, separate entity that puts its name and label on the product (frequently called “private labeling”) and markets and sells the product as its own product.

A.4.5.5 Subcontractors include, but are not limited to, a person or persons, company, firm, corporation, partnership, or other organization having an agreement with or under contract with the compliant product manufacturer to supply or assemble the compliant product or portions of the compliant product.

A.4.6.1 ISO Guide 27 is a component of the accreditation of certification organizations specified in 4.1.5 and 4.2.3 of this standard. Those paragraphs contain mandatory reference to ISO/IEC Guide 17065, *Conformity assessment — Requirements for bodies certifying products, processes and services*, in which ISO/IEC Guide 27 is referenced.

A.4.6.2 By definition, a hazard might involve a condition that can be imminently dangerous to the end user. Therefore, the investigation should be started immediately and completed in as timely a manner as is appropriate considering the particulars of the hazard being investigated.

A.4.6.11 Determination of the appropriate corrective action for the certification organization to initiate should take into consideration the severity of the product hazard and its potential consequences to the safety and health of end users. The scope of testing and evaluation should consider, among other things, testing to the requirements of the standard to which the product was listed as compliant; the age of the compliant product and the type of use and conditions to which the compliant product has been exposed; the care and maintenance that has been provided; the use of expertise on technical matters outside the certification organization’s area of competence; and product hazards caused by circumstances not anticipated by the requirements of the applicable standard. As a guideline for determining between a safety alert and a product recall, the following product hazard characteristics, based on 42 CFR 84, Subpart E, §84.41, are provided:

Critical: A product hazard that judgment and experience indicate is likely to result in a condition immediately hazardous to life or health (IHLH) for individuals using or depending on the compliant product.

If an IHLH condition occurs, the user will sustain or will likely sustain an injury of a severity that could result in loss of

life, resultant significant bodily injury, or loss of bodily function, either immediately or at some point in the future.

Major A: A product hazard other than *Critical* that is likely to result in failure to the degree that the compliant product does not provide any protection or reduces protection and that is not detectable to the user.

The phrase *reduces protection* means the failure of specific protective design(s) or feature(s) that results in degradation of protection in advance of reasonable life expectancy to the point that continued use of the product is likely to cause physical harm to the user, or where continued degradation could lead to IHLH conditions.

Major B: A product hazard other than *Critical* or *Major A* that is likely to result in reduced protection and that is detectable to the user.

The term *reduces protection* means the failure of specific protective design(s) or feature(s) that results in degradation of protection in advance of reasonable life expectancy to the point that continued use of the product is likely to cause physical harm to the user, or where continued degradation could lead to IHLH conditions.

Minor: A product hazard other than *Critical*, *Major A*, or *Major B* that is not likely to materially reduce the usability of the compliant product for its intended purpose or a product hazard that is a departure from the established applicable standard and has little bearing on the effective use or operation of the compliant product for its intended purpose.

Where the facts are conclusive, based on characteristics of the hazard classified as indicated in the preceding paragraphs, the certification organization should consider initiating the following corrective actions with the authorized and responsible parties:

- (1) *Critical product hazard characteristics:* product recall
- (2) *Major A product hazard characteristics:* product recall or safety alert, depending on the nature of the specific product hazard
- (3) *Major B product hazard characteristics:* safety alert or no action, depending on the nature of the specific product hazard
- (4) *Minor product hazard characteristic:* no action

A.5.2.3 Currently, the lowest temperature at which SCBAs can function is established by the manufacturer. However, this temperature must be –18°C (0°F) or colder. While the temperature for the performance of the cold-temperature-soak portions of the environmental temperature tests is specified by the manufacturer for certifying SCBAs, organizations specifying SCBAs should conduct a hazard and risk assessment, such as defined in MIL STD-810H, *Environmental Engineering Considerations and Laboratory Tests*, to determine possible cold-temperature exposures and the potential remedies that can be provided to prevent the adverse effects of long-term cold-temperature exposures to SCBAs while engaged in field operations. The hazard and risk assessment should account for expected operating conditions, especially the range of temperatures that are likely to be experienced at the organization’s location, the length of time for such exposures, the manner of storage for SCBAs and any prestaging of SCBAs prior to their use (including equipment used for warming of SCBA units), and the specific operating procedures for the organization in the use of SCBAs — particularly in low-temperature environ-

ments. Specific procedures by the organization should include cautions and inspection procedures that are associated with use of SCBAs under cold-temperature-exposure conditions. Organizations can find further information from the National Institute for Occupational Safety and Health (NIOSH) at: <https://www.cdc.gov/niosh/nppt/ppp-fireservice/scba/infographics.html>.

A.5.2.6 Recharging breathing air pressure vessels should follow applicable safe filling practices outlined in, but not limited to, NFPA 1500 and the SCBA manufacturer's instructions.

A.5.2.7 Users should be aware that NFPA 1852 requires that all SCBA be airflow tested in accordance with the manufacturer's instructions at least annually. This interval of testing might not be adequate if SCBA are used frequently. It is recommended that airflow testing be based on the number of SCBA uses rather than solely on time intervals.

A.6.4 Use of the RIC UAC is intended for emergency situations. Recharging breathing air pressure vessels during routine operations and training should follow applicable safe filling practices outlined in, but not limited to, NFPA 1500, NFPA 1852, and manufacturers' instructions.

A.7.1 The current NIOSH certification test method, 42 CFR 84, "Approval of Respiratory Protective Devices," uses a ventilation rate of 40 L/min, while NFPA 1986 requires an airflow test based on a ventilation rate of 100 L/min. A ventilation rate of 100 standard L/min encompasses the 98th percentile of all firefighters studied. The ability of the SCBA to supply the 100 L/min of breathing gas is measured in this airflow performance test by monitoring the pressure within the facepiece. Specific response times for both the pressure transducer and the recorder are specified in this standard. It is important to note that if other types of recording devices, measuring equipment, and testing methods are used, pressure fluctuations might appear in the facepiece as short (millisecond) negative pressure spikes. The significance of these spikes to the actual protection afforded the user by the SCBA is not fully understood at this time. Additional studies are needed to determine the significance, if any, of these spikes. Because the negative spikes might affect the actual protection offered by the SCBA, it is recommended that a facepiece fitting program be established. Quantitative fitting tests are recognized to be the best method for determining the facepiece-to-face seal and should be performed by the fire service wherever SCBA are used. For departments that wish to perform quantitative fit testing, a suggested procedure for conducting such tests can be found in ANSI Z88.2, *Practices for Respiratory Protection*; ANSI Z88.10, *Respirator Fit Test Methods*; and 29 CFR 1910.34, "Respiratory Protection."

A.7.6 This standard contains an abrasion test that is used to evaluate the outside surface of the facepiece lens. This standard does not address the abrasion resistance of the interior surface of the facepiece lens. Current facepiece lens interior surfaces can be uncoated, coated with an antifog agent, coated with an abrasion-resistant agent that does not comply with the performance required in Section 7.6, or coated with an abrasion-resistant coating that does comply with the performance required in Section 7.6. Information regarding coatings on the lens interior surface should be obtained from the SCBA manufacturer.

A.7.18.1 Manufacturers can choose to have testing performed against one or more of the chemicals provided in Table 7.18.1.

A.8.1.3.3 The quality of the compressed breathing air used in open-circuit SCBA has a direct effect on the performance of the equipment. It is therefore imperative that breathing air consistent with the design criteria established in this standard is used to ensure that the SCBA will continue to meet the performance criteria contained in this standard. It has been established through years of experience that breathing air that meets the requirements of NFPA 1989, which specifies a maximum moisture content of 24 ppm or drier [i.e., a dew point of -54°C (-65°F) or lower] and a maximum particulate level of 5 mg/m^3 air, will meet the needs of both emergency services personnel and the SCBA.

A.8.1.5.1 The following is the calibration procedure for a breathing machine:

- (1) **Equipment setup:** With the breathing machine stopped, connect a spirometer (Collins Medical model 06031 or equivalent) to the mouth of the headform such that an airtight connection is made. Indication of an airtight connection should be interpreted as an imperceptible change in indicated spirometer volume over a 30-second period.
- (2) **For volume measurement at 100 L/min rate:**
 - (a) Select the "Breathe at 100 L/min Rate" on the breathing machine control panel.
 - (b) Measure the tidal volume of the breathing machine bellows by reading the spirometer.
 - (c) Verify volume measured (V_m) to be 3.4 L, ± 0.1 L.
 - (d) Select "stop" on the breathing machine control panel.
- (3) **Volume measurement at 40 L/min rate:**
 - (a) Select "Breathe at 40 L/min Rate" on the breathing machine control panel.
 - (b) Measure the tidal volume of the breathing machine bellows by reading the spirometer.
 - (c) Verify volume measured (V_m) to be 1.67 L, ± 0.1 L.
 - (d) Select "stop" on the breathing machine control panel.
- (4) **Adjustments:**
 - (a) If the volume measured (V_m) is between 3.3 L and 3.5 L for the 100 L/min breathing rate and between 1.57 L and 1.77 L for the 40 L/min breathing rate, the breathing machine is ready for the NFPA airflow performance testing to be conducted.
 - (b) If the volume measured (V_m) is not between 3.3 L and 3.5 L for the 100 L/min breathing rate and not between 1.57 and 1.77 L for the 40 L/min breathing rate, the breathing machine must be adjusted appropriately and the V_m remeasured before the NFPA airflow performance testing is conducted.

A.8.3.4.5 See Annex B for surrogate breathing air pressure vessel preparation.

A.8.5.4.5 A means for doing this is by use of a properly calibrated smoke meter and standard light source.

A.8.5.4.7 Silica flour can present a health hazard. When using silica flour, ensure that the chamber is functioning properly and not leaking.

A.8.7.4.12.2 Any changes made to the pink noise speaker configuration require recalibration of the pink noise spectrum in accordance with 8.7.4.13.

A.8.7.4.15 There are differences between the speech transmission characteristics of flexible and rigid facepieces employed by the user community associated with this standard. The test method specified in this paragraph reflects the operational use or environment that a typical user could encounter. If improved speech transmission characteristics are required, the user should consider utilizing a rigid facepiece or a supplementary voice communications system.

A.8.21.4.12.2 Any changes made to the pink noise speaker configuration require recalibration of the pink noise spectrum in accordance with 8.7.4.13.

Annex B Surrogate Breathing Air Pressure Vessel Preparation Procedure

This annex is not a part of the requirements of this NFPA document but is included for informational purposes only.

B.1 Recommended Procedure for Surrogate Breathing Air Pressure Vessel Preparation. Terms used in the procedure are as follows:

- (1) Free-Air Volume (V): The amount of air in cubic feet at standard atmospheric conditions stored in the breathing air pressure vessel
- (2) Water Volume (WV): Internal volume of the test breathing air pressure vessel determined by calculating water displacement
- (3) Rated Storage Pressure (P): The nominal storage pressure rating of the breathing air pressure vessel at room temperature

B.2 Determining Mass of Air Stored in Breathing Air Pressure Vessel (M). The following formula is used to determine M :

$$M = 0.0748V \quad [\text{B.2}]$$

where:

M = mass of air in breathing air pressure vessel (lbm)

V = free-air volume (ft³)

B.3 Determining Nominal Design Weight (W). Weight can be estimated based on the following components:

$$W = W_1 + W_2 + M \quad [\text{B.3}]$$

where:

W_1 = tare weight of empty breathing air pressure vessel less breathing air pressure vessel valve

W_2 = weight of breathing air pressure vessel valve assembly

M = mass of air in breathing air pressure vessel (lbm)

B.4 Determining Ballast Rod Length (L). The ballast rod length (L) is determined by measuring the overall length from the neck of the breathing air pressure vessel to the center of the bottom of the breathing air pressure vessel (L_1). The threaded engagement of the breathing air pressure vessel valve is also measured (L_2).

The overall length is calculated as follows (dimensions are shown in Figure 8.3.4.7):

$$L = L_1 - L_2 + 0.32 \text{ in.} \quad [\text{B.4}]$$

Note that it is important to ensure that the ballast rod does not extend beyond the breathing air pressure vessel.

B.5 Determining the Nominal Diameter of the Ballast Rod (D). The nominal diameter (D) of the ballast rod is calculated as follows:

$$D = 2.060 \sqrt{\frac{(M - 0.00318)V_2}{L}} \quad [\text{B.5a}]$$

where:

M = air mass in breathing air pressure vessel (lbm)

V_2 = air volume in breathing air pressure vessel (in.³)

L = ballast rod length (in.)

The air volume in the breathing air pressure vessel (V_2) is calculated as follows:

$$V_2 = \frac{14.7V}{(P + 14.7)17.28} \quad [\text{B.5b}]$$

where:

V = free-air volume of breathing air pressure vessel (ft³)

P = rated storage pressure

B.6 Determining the Necessary Foam Weight (WF). The WF is found by subtracting the ballast rod weight from the total air storage weight as follows:

$$WF = (M - 0.2388)(D^2)(L) \quad [\text{B.6}]$$

where:

M = air mass in breathing air pressure vessel (lbm)

D = nominal diameter of ballast rod (in.)

L = ballast rod length (in.)

The foam should have a molded density of 5.5 lbf/ft³.

B.7 Breathing Air Pressure Vessel Preparation. Empty the breathing air pressure vessel of air and fully open the breathing air pressure vessel valve. Remove the breathing air pressure vessel valve from the breathing air pressure vessel. A means of threading the ballast rod to the breathing air pressure vessel valve must be incorporated. That procedure is most readily implemented by removing the dip tube from the breathing air pressure vessel valve and adding a 3/8-16-UNC female thread on the end of the breathing air pressure vessel valve mounting thread.

B.8 Ballast Rod Machining. The ballast rod is machined from ASTM B16 brass (hard). The machining details are provided in Figure 8.3.4.7. Care should be taken to ensure that the rod does not interfere with the breathing air pressure vessel at the

valve end, which might require machining a short thread relief at the breathing air pressure vessel valve end of the ballast rod, as indicated in Figure 8.3.4.7.

B.9 Breathing Air Pressure Vessel Foam Filling. Once the breathing air pressure vessel valve has been installed and the ballast rod has been installed and torqued, the breathing air pressure vessel should be positioned vertically with the fill/vent holes pointing upward. Foam should be added to the breathing air pressure vessel to fully fill all voids and maintain the previously calculated breathing air pressure vessel weight. The entire volume of the breathing air pressure vessel will fill, and excess foam will vent out of the two fill holes. This material should be removed from the external surface of the breathing air pressure vessel.

B.10 Comparison of Total Mass of Surrogate Breathing Air Pressure Vessel to Submitted Breathing Air Pressure Vessel. The fully pressurized breathing air pressure vessel submitted for testing and the completed surrogate breathing air pressure vessel should be weighed separately. The weight of the surrogate breathing air pressure vessel cannot vary from the weight of the pressurized breathing air pressure vessel that was submitted for testing by more than 5 percent.

Annex C Informational References

C.1 Referenced Publications. The documents or portions thereof listed in this annex are referenced within the informational sections of this standard and are not part of the requirements of this document unless also listed in Chapter 2 for other reasons.

C.1.1 NFPA Publications. National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02169-7471.

NFPA 1500™, *Standard on Fire Department Occupational Safety, Health, and Wellness Program*, 2021 edition.

NFPA 1852, *Standard on Selection, Care, and Maintenance of Open-Circuit Self-Contained Breathing Apparatus (SCBA)*, 2019 edition.

NFPA 1989, *Standard on Breathing Air Quality for Emergency Services Respiratory Protection*, 2019 edition.

C.1.2 Other Publications.

C.1.2.1 ANSI Publications. American National Standards Institute, Inc. (operations) 25 West 43rd Street, 4th Floor, New York, NY 10036; (headquarters) 1899 L Street, NW, 11th Floor, Washington, DC 20036.

ANSI Z88.2, *Practices for Respiratory Protection*, 1992.

ANSI Z88.10, *Respirator Fit Test Methods*, 2001.

C.1.2.2 ISO Publications. International Organization for Standardization, ISO Central Secretariat, BIBC II, Chemin de Blandonnet 8, CP 401 - 1214 Vernier, Geneva, Switzerland.

ISO Guide 27, *Guidelines for corrective action to be taken by a certification body in the event of misuse of its mark of conformity*, 1983.

ISO/IEC 17065, *Conformity assessment — Requirements for bodies certifying products, processes and services*, 2012.

C.1.2.3 US Government Publications. US Government Publishing Office, 732 North Capitol Street, NW, Washington, DC 20401-0001.

Title 29, Code of Federal Regulations, Part 1910.34, “Respiratory Protection,” 8 January 1998.

Title 42, Code of Federal Regulations, Part 84, “Approval of Respiratory Protective Devices, Tests for Permissibility,” 8 June 1995.

C.1.2.4 US Military Publications. US Army Developmental Test Command (DTC), Technology Management Division (CSTE-DTC-IT-M), 314 Longs Corner Road, Aberdeen Proving Ground, MD 21005-5055.

MIL STD-810H, *Environmental Engineering Considerations and Laboratory Tests*, 2019.

C.2 Informational References.

C.2.1 ANSI Publications. American National Standards Institute, Inc. (operations) 25 West 43rd Street, 4th Floor, New York, NY 10036; (headquarters) 1899 L Street, NW, 11th Floor, Washington, DC 20036.

ANSI Z88.6, *Respiratory Protection—Respirator Use—Physical Qualifications for Personnel*, 1984.

C.2.2 ASTM Publication. ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959.

ASTM B16, *Standard Specification for Free-Cutting Brass Rod, Bar and Shapes for Use in Screw Machines*, 2000.

C.2.3 ISO Publications. International Organization for Standardization, ISO Central Secretariat, BIBC II, Chemin de Blandonnet 8, CP 401 - 1214 Vernier, Geneva, Switzerland.

ISO/IEC Guide 65, *General requirements for bodies operating product certification systems*, 1996.

C.3 References for Extracts in Informational Sections. (Reserved)

Index

Copyright © 2022 National Fire Protection Association. All Rights Reserved.

The copyright in this index is separate and distinct from the copyright in the document that it indexes. The licensing provisions set forth for the document are not applicable to this index. This index may not be reproduced in whole or in part by any means without the express written permission of NFPA.

-A-

Accessory

Definition, 3.3.1

Accreditation

Definition, 3.3.2

Administration, Chap. 1

Application, 1.3

Purpose, 1.2

Scope, 1.1

Units, 1.4

Approved

Definition, 3.2.1, A.3.2.1

Atmosphere-Supplying Respirator

Definition, 3.3.3

Audit

Definition, 3.3.4

Authority Having Jurisdiction (AHJ)

Definition, 3.2.2, A.3.2.2

-B-

Breathing Air

Definition, 3.3.5

Breathing Air Pressure Vessel

Definition, 3.3.7

Breathing Air/Gas Container

Definition, 3.3.6

-C-

Certification

Definition, 3.3.8

Certification, Chap. 4

Certification Program, 4.2

General, 4.1

Hazards Involving Compliant Product, 4.6

Inspections and Testing, 4.3, A.4.3

Manufacturers' Investigations of Complaints and Returns, 4.7

Manufacturers' Quality Assurance Programs, 4.5

Manufacturers' Safety Alert and Product Recall Systems, 4.8

Recertification, 4.4

Certification Organization

Definition, 3.3.9

Certified

Definition, 3.3.10

Char

Definition, 3.3.11

Closed-Circuit SCBA

Definition, 3.3.12

Combination SCBA/SAR

Definition, 3.3.13, A.3.3.13

Compliance

Definition, 3.3.14

Compliant

Definition, 3.3.15

Component

Definition, 3.3.16, A.3.3.16

Compressed Breathing Air

Definition, 3.3.17, A.3.3.17

-D-

Definitions, Chap. 3

Demand SCBA

Definition, 3.3.18

Design Requirements, Chap. 6

Accessories Design Requirements, 6.7

End-of-Service-Time Indicator (EOSTI) Design Requirements, 6.2

General Design Requirements, 6.1

Optional Emergency Breathing Safety System (EBSS) Design Requirements, 6.6

Optional HUD Design Requirements, 6.3

Visual Alert Signals (when in the active mode), 6.3.8

Visual Informational Displays (when in the active mode), 6.3.9

Optional Rapid Intervention Crew/Company Universal Air Connection (RIC UAC) Design Requirements, 6.4, A.6.4

RIC UAC Coupling, 6.4.7

RIC UAC Female Fitting, 6.4.5

RIC UAC Filling Hose Assembly, 6.4.6

RIC UAC Male Fitting, 6.4.4

Power Source Design Requirements, 6.5

Drip

Definition, 3.3.19

-E-

EBSS

Definition, 3.3.20

Emergency Breathing Safety System (EBSS)

Definition, 3.3.21

End-of-Service-Time Indicator (EOSTI)

Definition, 3.3.22

EOSTI

Definition, 3.3.23

Explanatory Material, Annex A

-F-

Fabric Component

Definition, 3.3.24

Facepiece

Definition, 3.3.25

Follow-Up Program

Definition, 3.3.26

-G-**Gas**

Definition, 3.3.27

-H-**HATS**

Definition, 3.3.28

Haze

Definition, 3.3.29

Head and Torso Simulator (HATS)

Definition, 3.3.30

Heads-Up Display (HUD)

Definition, 3.3.31

HUD

Definition, 3.3.32

-I-**Identical SCBA**

Definition, 3.3.33

Informational References, Annex C**Inspection**

Definition, 3.3.34

-L-**Labeled**

Definition, 3.2.3

Labeling and Information, Chap. 5

Product Label Requirements, 5.1

User Information, 5.2

Listed

Definition, 3.2.4, A.3.2.4

-M-**Manufacturer**

Definition, 3.3.35

Melt

Definition, 3.3.36

Microphone Measurement Point (MMP)

Definition, 3.3.37

MMP

Definition, 3.3.38

Mouth Reference Point (MRP)

Definition, 3.3.39

MRP

Definition, 3.3.40

-N-**Negative Pressure SCBA**

Definition, 3.3.41

NIOSH Certified

Definition, 3.3.42, A.3.3.42

-O-**Open-Circuit SCBA**

Definition, 3.3.43

-P-**Performance Requirements, Chap. 7**

Additional SCBA HUD Performance, 7.11

Airflow Performance, 7.1, A.7.1

Breathing Air Pressure Vessel Performance Requirements, 7.13

Carbon Dioxide (CO₂) Content Performance, 7.9

Corrosion Resistance Performance, 7.4

Emergency Breathing Safety System Cold Temperature Performance Requirements, 7.17

Environmental Temperature Performance, 7.2

EOSTI Alarm Recognition, 7.10

Facepiece Lens Abrasion Resistance Performance, 7.6, A.7.6

Flame Resistance Performance, 7.8

Immersion Leakage Performance Requirements, 7.15

Low Power Capacity, 7.16

Nonelectronic Communications Performance Requirements, 7.7

Optional Toxic Industrial Chemical Permeation Resistance Performance Requirement, 7.18

Particulate Resistance Performance, 7.5

RIC UAC Performance Requirements, 7.12

Supplementary Voice Communications System Performance Requirements, 7.14

Vibration Resistance Performance, 7.3

Pink Noise

Definition, 3.3.44

Positive Pressure SCBA

Definition, 3.3.45

Pressure Demand SCBA

Definition, 3.3.46

Product Label

Definition, 3.3.47, A.3.3.47

-R-**Rapid Intervention Crew/Company Universal Air Connection (RIC UAC)**

Definition, 3.3.48

Rated Service Time

Definition, 3.3.49

Referenced Publications, Chap. 2**RIC**

Definition, 3.3.50

-S-**Sample**

Definition, 3.3.51

SAR

Definition, 3.3.52

SCBA

Definition, 3.3.53

SCBA/SAR

Definition, 3.3.54

Self-Contained Breathing Apparatus (SCBA)

Definition, 3.3.55, A.3.3.55

Service Life

Definition, 3.3.56

Service Time

Definition, 3.3.57

- Shall**
 - Definition, 3.2.5
- Should**
 - Definition, 3.2.6
- Sound Pressure Level (SPL)**
 - Definition, 3.3.58
- Specimen**
 - Definition, 3.3.59
- Speech Transmission Index (STI)**
 - Definition, 3.3.60
- SPL**
 - Definition, 3.3.61
- Standard**
 - Definition, 3.2.7
- STI**
 - Definition, 3.3.62
- Supplied Air Respirator (SAR)**
 - Definition, 3.3.63, A.3.3.63
- Surrogate Breathing Air Pressure Vessel Preparation Procedure, Annex B**
 - Ballast Rod Machining, B.8
 - Breathing Air Pressure Vessel Foam Filling, B.9
 - Breathing Air Pressure Vessel Preparation, B.7
 - Comparison of Total Mass of Surrogate Breathing Air Pressure Vessel to Submitted Breathing Air Pressure Vessel, B.10
 - Determining Ballast Rod Length (L), B.4
 - Determining Mass of Air Stored in Breathing Air Pressure Vessel (M), B.2
 - Determining Nominal Design Weight (W), B.3
 - Determining the Necessary Foam Weight (WF), B.6
 - Determining the Nominal Diameter of the Ballast Rod (D), B.5
 - Recommended Procedure for Surrogate Breathing Air Pressure Vessel Preparation, B.1
- Synthetic Breathing Air**
 - Definition, 3.3.64
- T-
- Test Methods, Chap. 8**
 - Accelerated Corrosion Test, 8.4**
 - Apparatus, 8.4.4
 - Application, 8.4.1
 - Interpretation, 8.4.7
 - Procedure, 8.4.5
 - Report, 8.4.6
 - Samples, 8.4.2
 - Specimen Preparation, 8.4.3
 - Airflow Performance Test, 8.1**
 - Apparatus, 8.1.4
 - Application, 8.1.1
 - Interpretation, 8.1.7
 - Procedure, 8.1.5
 - Report, 8.1.6
 - Samples, 8.1.2
 - Specimen Preparation, 8.1.3
 - Breathing Air Pressure Vessel and Valve Assembly Retention Test, 8.18**
 - Apparatus, 8.18.4
 - Application, 8.18.1
 - Interpretation, 8.18.7
 - Procedure, 8.18.5
 - Report, 8.18.6
 - Samples, 8.18.2
 - Specimen Preparation, 8.18.3
 - Breathing Air Pressure Vessel Connections and Accessibility Test, 8.20**
 - Application, 8.20.1
 - Interpretation, 8.20.6
 - Procedure, 8.20.4
 - Report, 8.20.5
 - Samples, 8.20.2
 - Specimen Preparation, 8.20.3
 - Breathing Air Pressure Vessel Refill Breathing Performance Test, 8.16**
 - Apparatus, 8.16.4
 - Application, 8.16.1
 - Interpretation, 8.16.7
 - Procedure, 8.16.5
 - Report, 8.16.6
 - Samples, 8.16.2
 - Specimen Preparation, 8.16.3
 - Emergency Breathing Safety System (EBSS) Cold Temperature Performance Test, 8.23**
 - Apparatus, 8.23.4
 - Application, 8.23.1
 - Interpretation, 8.23.7
 - Procedure, 8.23.5
 - Report, 8.23.6
 - Samples, 8.23.2
 - Specimen Preparation, 8.23.3
 - Environmental Temperature Tests, 8.2**
 - Apparatus, 8.2.4
 - Application, 8.2.1
 - Interpretation, 8.2.7
 - Procedure, 8.2.5
 - Test 1, 8.2.5.5
 - Test 2, 8.2.5.6
 - Test 3, 8.2.5.7
 - Test 4, 8.2.5.8
 - Report, 8.2.6
 - Samples, 8.2.2
 - Specimen Preparation, 8.2.3
 - EOSTI Recognition Test, 8.10**
 - Apparatus, 8.10.4
 - Application, 8.10.1
 - Interpretation, 8.10.7
 - Procedure, 8.10.5
 - Report, 8.10.6
 - Sample, 8.10.2
 - Specimen Preparation, 8.10.3
 - Facepiece Carbon Dioxide Content Test, 8.9**
 - Application, 8.9.1
 - Interpretation, 8.9.6
 - Report, 8.9.5
 - Specimen Preparation, 8.9.3
 - Specimens, 8.9.2

Facepiece Lens Abrasion Test, 8.6

- Apparatus, 8.6.4
- Application, 8.6.1
- Interpretation, 8.6.7
- Procedure, 8.6.5
- Report, 8.6.6
- Samples, 8.6.2
- Specimen Preparation, 8.6.3

Flame Test, 8.8

- Apparatus, 8.8.4
- Application, 8.8.1
- Interpretation, 8.8.7
- Procedure, 8.8.5
- Report, 8.8.6
- Samples, 8.8.2
- Specimen Preparation, 8.8.3

HUD Disabling Glare Test, 8.15

- Apparatus, 8.15.4
- Application, 8.15.1
- Interpretation, 8.15.7
- Procedure, 8.15.5
- Report, 8.15.6
- Samples, 8.15.2
- Specimen Preparation, 8.15.3

HUD Low Power Source Alert Signal Test, 8.12

- Apparatus, 8.12.4
- Application, 8.12.1
- Interpretation, 8.12.7
- Procedure, 8.12.5
- Report, 8.12.6
- Samples, 8.12.2
- Specimen Preparation, 8.12.3

HUD Visibility Tests, 8.13

- Darkness Test, 8.13.1
 - Apparatus, 8.13.1.4
 - Application, 8.13.1.1
 - Interpretation, 8.13.1.7
 - Procedure, 8.13.1.5
 - Report, 8.13.1.6
 - Samples, 8.13.1.2
 - Specimen Preparation, 8.13.1.3

HUD Wiring Connection Strength Test, 8.11

- Apparatus, 8.11.4
- Application, 8.11.1
- Interpretation, 8.11.7
- Procedure, 8.11.5
- Report, 8.11.6
- Samples, 8.11.2
- Specimen Preparation, 8.11.3

Immersion Leakage Test, 8.19

- Apparatus, 8.19.4
- Application, 8.19.1
- Procedure, 8.19.5
- Samples, 8.19.2
- Specimens, 8.19.3

Light Test, 8.14

- Apparatus, 8.14.4

Application, 8.14.1**Interpretation, 8.14.7****Procedure, 8.14.5****Report, 8.14.6****Samples, 8.14.2****Specimen Preparation, 8.14.3****Low Power Capacity Test, 8.22****Apparatus, 8.22.4****Application, 8.22.1****Interpretation, 8.22.7****Procedure, 8.22.5****Report, 8.22.6****Samples, 8.22.2****Specimen Preparation, 8.22.3****Nonelectronic Communications Test, 8.7****Apparatus, 8.7.4****Application, 8.7.1****Interpretation, 8.7.7****Procedure, 8.7.5****Report, 8.7.6****Samples, 8.7.2****Specimen Preparation, 8.7.3****Optional Toxic Industrial Chemical Permeation Resistance Test, 8.24****Apparatus, 8.24.4****Application, 8.24.1****General Procedures for Testing, 8.24.5****Interpretation, 8.24.10****Procedure for Gas Challenges, 8.24.6****Procedure for Liquid Challenges, 8.24.7****Procedure for Vapor Challenges, 8.24.8****Report, 8.24.9****Samples, 8.24.2****Specimen Preparation, 8.24.3****Particulate Test, 8.5****Apparatus, 8.5.4****Application, 8.5.1****Interpretation, 8.5.7****Procedure, 8.5.5****Report, 8.5.6****Samples, 8.5.2****Specimen Preparation, 8.5.3****RIC UAC System Fill Rate Test, 8.17****Apparatus, 8.17.4****Application, 8.17.1****Interpretation, 8.17.7****Procedure, 8.17.5****Report, 8.17.6****Samples, 8.17.2****Specimen Preparation, 8.17.3****Supplementary Voice Communications System Performance Test, 8.21****Apparatus, 8.21.4****Application, 8.21.1****Interpretation, 8.21.7****Procedure, 8.21.5****Report, 8.21.6**

Samples, 8.21.2
Specimen Preparation, 8.21.3
Vibration Test, 8.3
Apparatus, 8.3.4
Application, 8.3.1
Interpretation, 8.3.7
Procedure, 8.3.5
Report, 8.3.6
Samples, 8.3.2
Specimen Preparation, 8.3.3
Testing
Definition, 3.3.65

-U-**UAC**

Definition, 3.3.66

Universal Air Connection (UAC)

Definition, 3.3.67

-V-**Variant**

Definition, 3.3.68



Sequence of Events for the Standards Development Process

Once the current edition is published, a Standard is opened for Public Input.

Step 1 – Input Stage

- Input accepted from the public or other committees for consideration to develop the First Draft
- Technical Committee holds First Draft Meeting to revise Standard (23 weeks); Technical Committee(s) with Correlating Committee (10 weeks)
- Technical Committee ballots on First Draft (12 weeks); Technical Committee(s) with Correlating Committee (11 weeks)
- Correlating Committee First Draft Meeting (9 weeks)
- Correlating Committee ballots on First Draft (5 weeks)
- First Draft Report posted on the document information page

Step 2 – Comment Stage

- Public Comments accepted on First Draft (10 weeks) following posting of First Draft Report
- If Standard does not receive Public Comments and the Technical Committee chooses not to hold a Second Draft meeting, the Standard becomes a Consent Standard and is sent directly to the Standards Council for issuance (see Step 4) or
- Technical Committee holds Second Draft Meeting (21 weeks); Technical Committee(s) with Correlating Committee (7 weeks)
- Technical Committee ballots on Second Draft (11 weeks); Technical Committee(s) with Correlating Committee (10 weeks)
- Correlating Committee Second Draft Meeting (9 weeks)
- Correlating Committee ballots on Second Draft (8 weeks)
- Second Draft Report posted on the document information page

Step 3 – NFPA Technical Meeting

- Notice of Intent to Make a Motion (NITMAM) accepted (5 weeks) following the posting of Second Draft Report
- NITMAMs are reviewed and valid motions are certified by the Motions Committee for presentation at the NFPA Technical Meeting
- NFPA membership meets each June at the NFPA Technical Meeting to act on Standards with “Certified Amending Motions” (certified NITMAMs)
- Committee(s) vote on any successful amendments to the Technical Committee Reports made by the NFPA membership at the NFPA Technical Meeting

Step 4 – Council Appeals and Issuance of Standard

- Notification of intent to file an appeal to the Standards Council on Technical Meeting action must be filed within 20 days of the NFPA Technical Meeting
- Standards Council decides, based on all evidence, whether to issue the standard or to take other action

Notes:

1. Time periods are approximate; refer to published schedules for actual dates.
2. Annual revision cycle documents with certified amending motions take approximately 101 weeks to complete.
3. Fall revision cycle documents receiving certified amending motions take approximately 141 weeks to complete.

Committee Membership Classifications^{1,2,3,4}

The following classifications apply to Committee members and represent their principal interest in the activity of the Committee.

1. M *Manufacturer*: A representative of a maker or marketer of a product, assembly, or system, or portion thereof, that is affected by the standard.
2. U *User*: A representative of an entity that is subject to the provisions of the standard or that voluntarily uses the standard.
3. IM *Installer/Maintainer*: A representative of an entity that is in the business of installing or maintaining a product, assembly, or system affected by the standard.
4. L *Labor*: A labor representative or employee concerned with safety in the workplace.
5. RT *Applied Research/Testing Laboratory*: A representative of an independent testing laboratory or independent applied research organization that promulgates and/or enforces standards.
6. E *Enforcing Authority*: A representative of an agency or an organization that promulgates and/or enforces standards.
7. I *Insurance*: A representative of an insurance company, broker, agent, bureau, or inspection agency.
8. C *Consumer*: A person who is or represents the ultimate purchaser of a product, system, or service affected by the standard, but who is not included in (2).
9. SE *Special Expert*: A person not representing (1) through (8) and who has special expertise in the scope of the standard or portion thereof.

NOTE 1: “Standard” connotes code, standard, recommended practice, or guide.

NOTE 2: A representative includes an employee.

NOTE 3: While these classifications will be used by the Standards Council to achieve a balance for Technical Committees, the Standards Council may determine that new classifications of member or unique interests need representation in order to foster the best possible Committee deliberations on any project. In this connection, the Standards Council may make such appointments as it deems appropriate in the public interest, such as the classification of “Utilities” in the National Electrical Code Committee.

NOTE 4: Representatives of subsidiaries of any group are generally considered to have the same classification as the parent organization.

Submitting Public Input / Public Comment Through the Online Submission System

Following publication of the current edition of an NFPA standard, the development of the next edition begins and the standard is open for Public Input.

Submit a Public Input

NFPA accepts Public Input on documents through our online submission system at www.nfpa.org. To use the online submission system:

- Choose a document from the List of NFPA codes & standards or filter by Development Stage for “codes accepting public input.”
- Once you are on the document page, select the “Next Edition” tab.
- Choose the link “The next edition of this standard is now open for Public Input.” You will be asked to sign in or create a free online account with NFPA before using this system.
- Follow the online instructions to submit your Public Input (see www.nfpa.org/publicinput for detailed instructions).
- Once a Public Input is saved or submitted in the system, it can be located on the “My Profile” page by selecting the “My Public Inputs/Comments/NITMAMs” section.

Submit a Public Comment

Once the First Draft Report becomes available there is a Public Comment period. Any objections or further related changes to the content of the First Draft must be submitted at the Comment Stage. To submit a Public Comment follow the same steps as previously explained for the submission of Public Input.

Other Resources Available on the Document Information Pages

Header: View document title and scope, access to our codes and standards or NFCSS subscription, and sign up to receive email alerts.

 Current & Prior Editions	Research current and previous edition information.
 Next Edition	Follow the committee’s progress in the processing of a standard in its next revision cycle.
 Technical Committee	View current committee rosters or apply to a committee.
 Ask a Technical Question	For members, officials, and AHJs to submit standards questions to NFPA staff. Our Technical Questions Service provides a convenient way to receive timely and consistent technical assistance when you need to know more about NFPA standards relevant to your work.
 News	Provides links to available articles and research and statistical reports related to our standards.
 Purchase Products & Training	Discover and purchase the latest products and training.
 Related Products	View related publications, training, and other resources available for purchase.

Information on the NFPA Standards Development Process

I. Applicable Regulations. The primary rules governing the processing of NFPA standards (codes, standards, recommended practices, and guides) are the *NFPA Regulations Governing the Development of NFPA Standards (Regs)*. Other applicable rules include *NFPA Bylaws*, *NFPA Technical Meeting Convention Rules*, *NFPA Guide for the Conduct of Participants in the NFPA Standards Development Process*, and the *NFPA Regulations Governing Petitions to the Board of Directors from Decisions of the Standards Council*. Most of these rules and regulations are contained in the *NFPA Standards Directory*. For copies of the *Directory*, contact Codes and Standards Administration at NFPA headquarters; all these documents are also available on the NFPA website at “www.nfpa.org/regs.”

The following is general information on the NFPA process. All participants, however, should refer to the actual rules and regulations for a full understanding of this process and for the criteria that govern participation.

II. Technical Committee Report. The Technical Committee Report is defined as “the Report of the responsible Committee(s), in accordance with the Regulations, in preparation of a new or revised NFPA Standard.” The Technical Committee Report is in two parts and consists of the First Draft Report and the Second Draft Report. (See *Regs* at Section 1.4.)

III. Step 1: First Draft Report. The First Draft Report is defined as “Part one of the Technical Committee Report, which documents the Input Stage.” The First Draft Report consists of the First Draft, Public Input, Committee Input, Committee and Correlating Committee Statements, Correlating Notes, and Ballot Statements. (See *Regs* at 4.2.5.2 and Section 4.3.) Any objection to an action in the First Draft Report must be raised through the filing of an appropriate Comment for consideration in the Second Draft Report or the objection will be considered resolved. [See *Regs* at 4.3.1(b).]

IV. Step 2: Second Draft Report. The Second Draft Report is defined as “Part two of the Technical Committee Report, which documents the Comment Stage.” The Second Draft Report consists of the Second Draft, Public Comments with corresponding Committee Actions and Committee Statements, Correlating Notes and their respective Committee Statements, Committee Comments, Correlating Revisions, and Ballot Statements. (See *Regs* at 4.2.5.2 and Section 4.4.) The First Draft Report and the Second Draft Report together constitute the Technical Committee Report. Any outstanding objection following the Second Draft Report must be raised through an appropriate Amending Motion at the NFPA Technical Meeting or the objection will be considered resolved. [See *Regs* at 4.4.1(b).]

V. Step 3a: Action at NFPA Technical Meeting. Following the publication of the Second Draft Report, there is a period during which those wishing to make proper Amending Motions on the Technical Committee Reports must signal their intention by submitting a Notice of Intent to Make a Motion (NITMAM). (See *Regs* at 4.5.2.) Standards that receive notice of proper Amending Motions (Certified Amending Motions) will be presented for action at the annual June NFPA Technical Meeting. At the meeting, the NFPA membership can consider and act on these Certified Amending Motions as well as Follow-up Amending Motions, that is, motions that become necessary as a result of a previous successful Amending Motion. (See 4.5.3.2 through 4.5.3.6 and Table 1, Columns 1-3 of *Regs* for a summary of the available Amending Motions and who may make them.) Any outstanding objection following action at an NFPA Technical Meeting (and any further Technical Committee consideration following successful Amending Motions, see *Regs* at 4.5.3.7 through 4.6.5) must be raised through an appeal to the Standards Council or it will be considered to be resolved.


VI. Step 3b: Documents Forwarded Directly to the Council. Where no NITMAM is received and certified in accordance with the *Technical Meeting Convention Rules*, the standard is forwarded directly to the Standards Council for action on issuance. Objections are deemed to be resolved for these documents. (See *Regs* at 4.5.2.5.)

VII. Step 4a: Council Appeals. Anyone can appeal to the Standards Council concerning procedural or substantive matters related to the development, content, or issuance of any document of the NFPA or on matters within the purview of the authority of the Council, as established by the *Bylaws* and as determined by the Board of Directors. Such appeals must be in written form and filed with the Secretary of the Standards Council (see *Regs* at Section 1.6). Time constraints for filing an appeal must be in accordance with 1.6.2 of the *Regs*. Objections are deemed to be resolved if not pursued at this level.

VIII. Step 4b: Document Issuance. The Standards Council is the issuer of all documents (see Article 8 of *Bylaws*). The Council acts on the issuance of a document presented for action at an NFPA Technical Meeting within 75 days from the date of the recommendation from the NFPA Technical Meeting, unless this period is extended by the Council (see *Regs* at 4.7.2). For documents forwarded directly to the Standards Council, the Council acts on the issuance of the document at its next scheduled meeting, or at such other meeting as the Council may determine (see *Regs* at 4.5.2.5 and 4.7.4).

IX. Petitions to the Board of Directors. The Standards Council has been delegated the responsibility for the administration of the codes and standards development process and the issuance of documents. However, where extraordinary circumstances requiring the intervention of the Board of Directors exist, the Board of Directors may take any action necessary to fulfill its obligations to preserve the integrity of the codes and standards development process and to protect the interests of the NFPA. The rules for petitioning the Board of Directors can be found in the *Regulations Governing Petitions to the Board of Directors from Decisions of the Standards Council* and in Section 1.7 of the *Regs*.

X. For More Information. The program for the NFPA Technical Meeting (as well as the NFPA website as information becomes available) should be consulted for the date on which each report scheduled for consideration at the meeting will be presented. To view the First Draft Report and Second Draft Report as well as information on NFPA rules and for up-to-date information on schedules and deadlines for processing NFPA documents, check the NFPA website (www.nfpa.org/docinfo) or contact NFPA Codes & Standards Administration at (617) 984-7246.

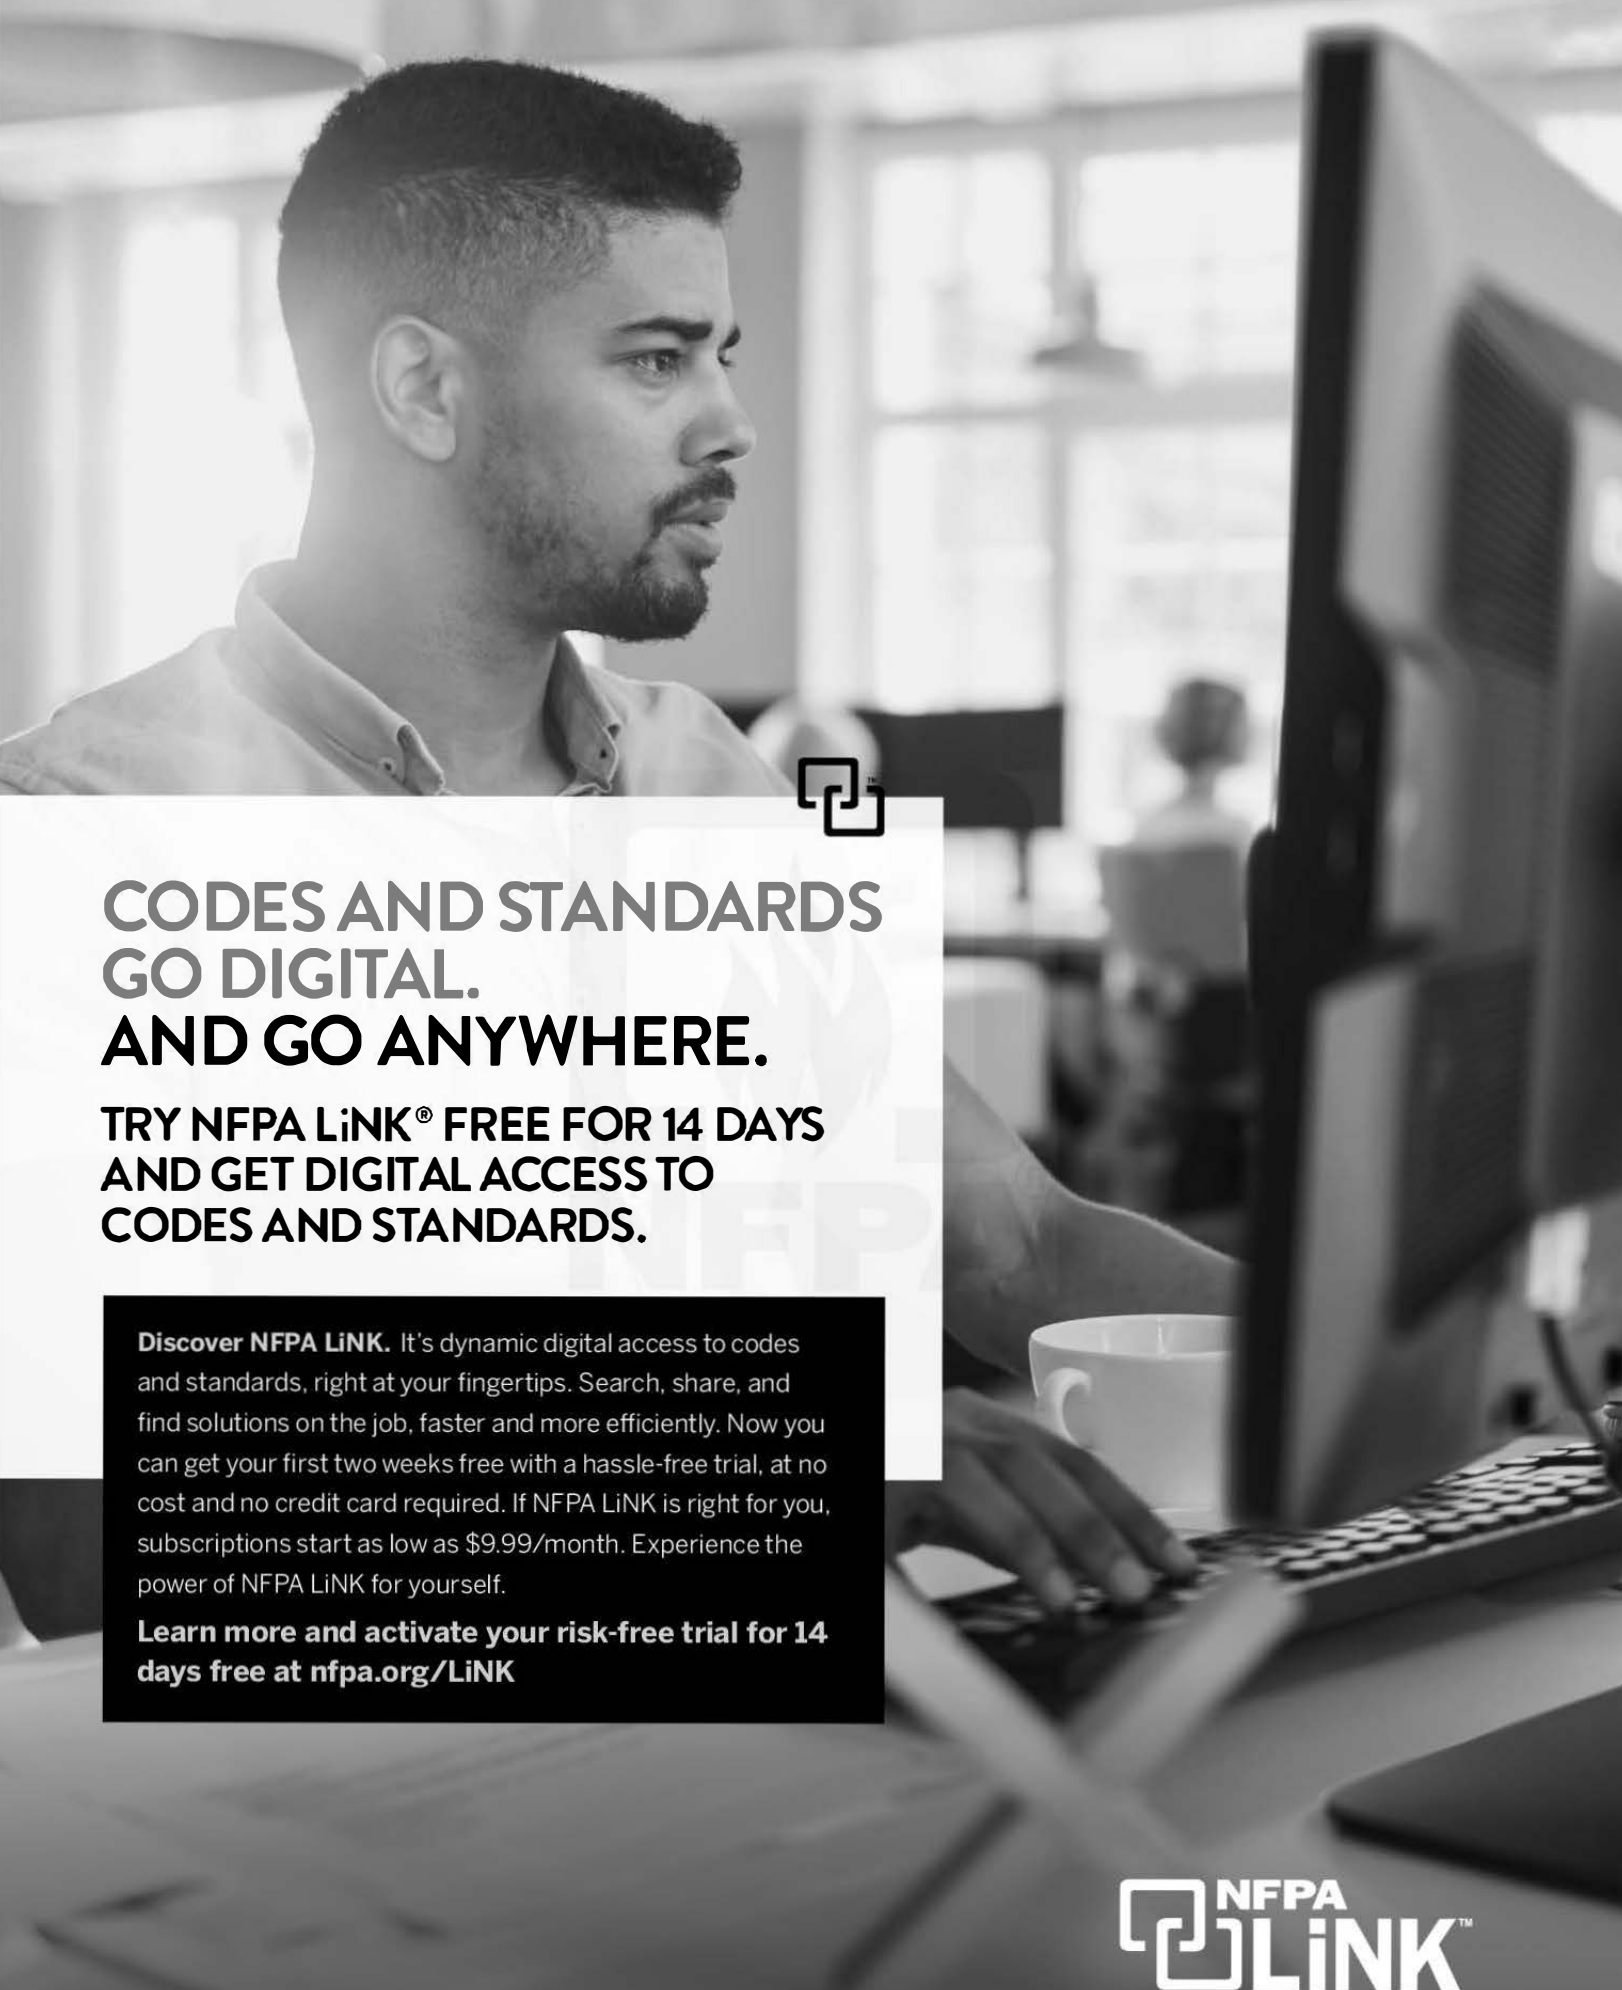

CODES AND STANDARDS GO DIGITAL. AND GO ANYWHERE.

**TRY NFPA LiNK® FREE FOR 14 DAYS
AND GET DIGITAL ACCESS TO
CODES AND STANDARDS.**

Discover NFPA LiNK. It's dynamic digital access to codes and standards, right at your fingertips. Search, share, and find solutions on the job, faster and more efficiently. Now you can get your first two weeks free with a hassle-free trial, at no cost and no credit card required. If NFPA LiNK is right for you, subscriptions start as low as \$9.99/month. Experience the power of NFPA LiNK for yourself.

Learn more and activate your risk-free trial for 14 days free at nfpa.org/LiNK