

Removal of cesium through adsorption from aqueous solutions: a systematic review

Mehrnoosh Abtahi¹, Yadolah Fakhri^{2,✉}, Mansour Sarafraz², Hassan Keramati³, Gea Oliveri Conti⁴, Margherita Ferrante⁴, Nazak Amanidaz⁵, Rokhsane Hosseini Pouya⁶, Bigard Moradi⁷, Zahra Baninameh⁸

1. Environmental and Occupational Hazards Control Research Center, Shahid Beheshti University of Medical Sciences, Tehran, Iran
2. Student Research Committee, Department of Environmental Health Engineering, School of Public Health, Shahid Beheshti University of Medical Sciences, Tehran, Iran
3. Department of Environmental Health Engineering, School of Public Health, Semnan University of Medical Sciences, Semnan, Iran
4. Department of Medical, Surgical Sciences and Advanced Technologies “G.F. Ingrassia”, University of Catania, Italy
5. Environmental Health Research Center, Golestan University of Medical Sciences, Golestan, Iran
6. Food Health Research Center, Hormozgan University of Medical Sciences, Bandar Abbas, Iran
7. Department of Health Public, Kermanshah University of Medical Sciences, Kermanshah, Iran
8. Sina Hospital, Ahvaz Jundishapur University of Medical Sciences, Ahvaz, Iran

Date of submission: 07 Nov 2017, **Date of acceptance:** 18 Feb 2018

ABSTRACT

Cesium radioactive isotopes (^{134}Cs and ^{137}Cs) are dangerous to human health due to their long half-life and high solubility in water. Nuclear experiments, wars, and nuclear plant accidents have been the main sources of Cs release into the environment. In recent years, several methods have been introduced for the elimination of Cs radioactive isotopes from contaminated water. This study provides an overview of the available published articles (2008–2016) regarding the remediation of waters polluted by Cs isotopes. The maximum adsorption capacity (MAC) of Cs isotopes corresponded to natural chabazite (273.24 mg Cs/g adsorbent), hollow Prussian blue (PB) nanoparticles (262 mg Cs/g adsorbent), and Prussian blue implemented non-woven fabric (260 mg Cs/g adsorbent). Using natural chabazite and PB adsorbents, along with another adsorbent (PB graphene oxide hydrogel), Cs radioactive isotopes can be effectively removed from the aqueous solutions.

Keywords: Cesium, Isotopes, Sorption, Biosorbents, Drinking Water, Radioactive Material

Introduction

In recent decades, radioactive material toxicity has attracted significant attention worldwide. In the recent earthquake in Japan, on March 11, 2011, large amounts of Cesium-134 (^{134}Cs) and Cesium-137 (^{137}Cs) radioactive materials (630,000–770,000 TBq) were discharged into the water, air, and soil.^{1,2} ^{137}Cs is the most abundant radionuclide and has devastating effects on the environment due to its high water solubility and long half-life.³

Furthermore, ^{137}Cs is a source of beta emission; therefore, it is called “heat generator”.⁴ The chemical behavior of ^{137}Cs is similar to sodium and potassium; hence, it can be deposited in the soft tissues of aquatic and terrestrial organisms.⁵ In the human body, ^{137}Cs can cause impairment of the reproductive system, liver, kidneys, and central nervous system, as well as cause behavioral disorders.⁶ Several techniques have been used to remove ^{137}Cs from aqueous solutions including precipitation,⁷ extraction,⁸ ion exchange,⁹ bioaccumulation,¹⁰ and adsorption process.^{11,12,13,14}

When we use the conventional water treatment methods, such as coagulation–sedimentation and sand filtration (10%–40% efficiency), removal of ^{137}Cs from the

✉ Yadolah Fakhri
ya.fakhri@gmail.com

Citation: Abtahi M, Fakhri Y, Sarafraz M, Keramati H, Conti GO, Ferrante M, et al. Removal of cesium through adsorption from aqueous solutions: a systematic review. J Adv Environ Health Res 2018; 6(2): 96-106

contaminated water is difficult.¹⁵ Significant efforts have been made to remove ^{137}Cs from the aqueous solution.¹⁵ Adsorbents including zeolites, crystalline silicotitanate, aluminum molybdophosphate, metal-ferricyanide, ferricyanide, and ammonium 12-molybdophosphate (AMP) have been tested for the removal of ^{137}Cs from waters.¹⁶ Natural adsorbents have low efficiency in removing ^{137}Cs from water, although, expensive synthetic adsorbents show high efficiency.¹⁷ Prussian blue (PB)-based adsorbents are efficient ^{137}Cs scavengers because the $\text{Fe}_7(\text{CN})_{18}$ matrix has a crystal cage size similar to the hydration radius of Cs ions.^{17,18} The efficiency of adsorbents in removing Cs depends on the chemical structure of the adsorbents, pH, temperature, and so on.¹⁹ The main objective of this study was to provide information on the current innovations about the removal of ^{137}Cs from aqueous solutions using adsorbent process.

Materials and Methods

Literature search

The search of the available studies and their analysis was carried out by three investigators (Ya.F, Me.A, and Ya.Z). Almost all the studies regarding the Cs removal from water solutions were screened in international and national databases. The international databases searched were Web of Science, PubMed, Scopus, ScienceDirect, and Google Scholar.

The keywords used were cesium, cesium, aqueous solutions, water, wastewater and its removal, treatment, radioactive, and radioactive liquid waste. The data published from January 2008 to October 2016 in the English language databases was collected. We also searched the bibliographies of retrieved articles for additional references. The literature search was based on PRISMA guideline (Fig. 1).²⁰

Inclusion and exclusion criteria

Original articles were included if they satisfied all the following criteria: (1) is an original article; (2) is a laboratory study about the removal of Cs from aqueous solutions by the adsorption process; (3) is written in the English

language; (4) was published online between January 2008 to October 2016; (5) full-text article is available.

Data extraction and definitions

The following variables were extracted from the included studies: adsorbent and maximum adsorption capacity (Table 1). Inconsistencies between the reviewers were discussed to obtain consensus through a focus group. The references of the selected articles were checked to identify all articles not found in the databases.

Results and Discussion

Four hundred ninety-one articles were reviewed separately by three investigators. Forty-two articles (73 studies) were selected for the final review. The release of radionuclides such as Cs, radium isotopes (^{226}Ra and ^{228}Ra), radon 222 (^{222}Rn), and thoron (Tn) into the environment, particularly into drinking water sources, can threaten human health.^{21,22,23,24} The maximum acceptable level of uranium (U) in drinking water is $30\ \mu\text{g/L}$, ^{228}Ra and ^{226}Ra combined is $5\ \text{PCi/L}$, the activity of alpha particles is $15\ \text{PCi/L}$, and that of beta particles and photons is $4\ \text{mrem/year}$.²⁵ With the release of beta particles, radio Cs is converted to ^{134}Cs (half-life of 2 years) and ^{137}Cs (half-life of 2.5 years).²⁵

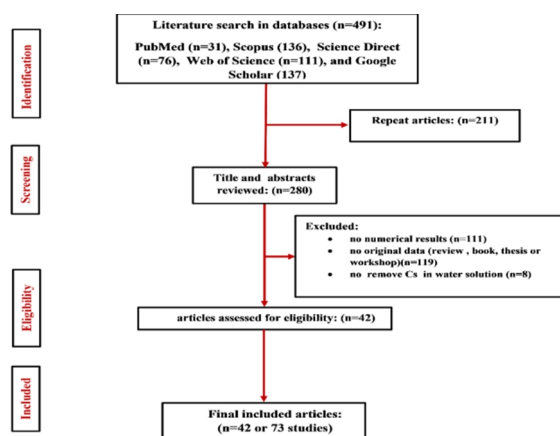


Fig. 1. Selection process of articles on the remove Cs from aqueous solutions by adsorption process

After 10 days of the Fukushima nuclear accident, Tokyo's drinking water was contaminated with Iodine-131 (^{131}I), and two

years later, traces of Cs radionuclides were still detectable in many of the Japanese cities.²⁶ Even at low levels, Cs radionuclides in drinking water could be harmful because they can accumulate in the human body.^{27,28} In the conventional water treatment plants, raw water that entered into a grain pond after its passage through coarse and fine dirt was stuck in the first place. Then, coagulants such as alum, ferric chloride, and ferric sulfate were added to the water. The formed flocs then settled in the sedimentation basin. The floc deposits were then collected from the bottom of the pond. Finally, the water was passed through slow or fast sand filters, so the tiny particles could be removed. Passing of water through sand filters made it clear. The water was then disinfected using chlorination units before it entered the water distribution system.²⁹ In the study by Morton *et al.* the average removal of Cs by the Jar test was 5%.³⁰ Gäfvert *et al.* reported that the removal of Cs was low in large wastewater treatment plants, in which alum and ferric sulfate were used as coagulants (110000 m³/d). They reported that the low turbidity in the Lake Bolmen water source was the main cause of decreased efficiency in Cs removal because the adsorption of Cs on the particles was reduced.³¹ Goossens *et al.* suggested that adding alum sulfate as a coagulant, together with activated carbon and activated silica, to the sand filters removed 31% and 25% of the coagulation, respectively, in the filtration units.³² Baeza *et al.* used ferric sulfate and ferric chloride as natural water coagulants and studied the radionuclide removal efficiency in the coagulation and flocculation process. The results showed that the efficiency of Cs removal was low (5.2%). The reason for the low efficiency of Cs removal was that the Cs was in a water-soluble form; therefore, coagulation was ineffective in the removal of Cs.³³ Kosaka *et al.* investigated the concentrations of ¹³¹I, ¹³⁴I, ¹³⁴Cs, and ¹³⁷Cs in five water treatment plants in Japan, and concluded that ¹³¹I treatment was not successful by the coagulation–sedimentation process, but 30%–40% of it was removed by adsorption on activated carbon. Radioactive Cs attached to the particles was

effectively removed by the coagulation and flocculation process, but the Cs ions (solution form) were not eliminated.³⁴ Brown *et al.* suggested that if the Cs was in a particle-bonded form, it was removed by the coagulation and flocculation process, in the range of 10%–40%, but if it was in a solution form, minimum removal efficiency was achieved.³⁵

Cs adsorption processes

Different biosorbent have been used for the Cs removal including hollow PB nanoparticles, bentonite, mesoporous hybrid adsorbent, vermiculite modification by ethylamine, montmorillonite-iron oxide composite, and NaOH-treated moss (Table 1).¹⁴ Since the adsorption process is more efficient and less expensive for Cs removal, extensive studies on Cs removal by a variety of surface adsorbents have been carried out worldwide. These studies examined the adsorption at low cost.¹⁴ Many extracellular polymeric substances are often present in a cell mass, which increase the affinity of Cs to absorb.³⁶ In the study by Borai *et al.*, it was shown that natural mordenite had more adsorption capacity for ¹³⁴Cs from liquid waste than natural clinoptilolite (NaNCI), natural chabazite (NaNCh), and synthetic mordenite (NaSM) (Table 1).³⁷

The radius of a bare Cs ion is 3.40 Å and is, therefore, easily accommodated by the large (smallest diameter 6.5 Å) 12-ring cavities in their mordenite structure.^{37,38} Brown *et al.* showed that the use of activated carbon and zeolite removes 0%–10% and 40%–70% of Cs from water, respectively. The turbidity removal capacity increases with an increase in turbidity.³⁵ Liang *et al.* suggest that the adsorption of Cs and strontium (Sr) from water by mordenite is mostly done by the mechanism of ion exchange.³⁹ Ion exchange also increases radionuclide adsorption.³⁹ Dyer *et al.* showed that use of pillared inter-layer clays (with high-level and high-ion exchange capacity) increased the affinity of Cs to absorption in comparison with calcium, potassium, ammonium, sodium, and magnesium.⁴⁰

Table 1. Recent studies for Cs adsorbents considering maximum adsorption

Adsorbent	Maximum adsorption capacity (mg Cs/g adsorbent)	Ref	Adsorbent	Maximum adsorption capacity (mg Cs/g adsorbent)	Ref
Natural chabazite	273.24	37	Coconut shell activated carbon	53.00	60
Hollow prussian blue nanoparticles	262	41	Prussian blue analogues CO ₃ [Fe(CN) ₆] ₂ ·H ₂ O (COFC)	52.6	62
Pb implemented non-woven fabric	260	42	Prussian blue (pb)	50.16	8
Natural mordenite	254.76	37	Montmorillonite-iron oxide composite (Mioc)	43.96	50
Prussian blue (pb) granules	241	42	CO ₃ [Fe(CN) ₆] ₂ ·H ₂ O (COFC)	39.6	63
Novel magnetic zeolite nanocomposite	229.3	43	Cnts	37.8	64
Synthetic mordenite	220.44	37	Taiwan laterite	37.63	65
Phosphoric acid activated montmorillonite	208	44	Synthetic a-x zeolite blend	29.33	66
Bentonite	176.09	45	Sm-amp20	29.3	41
Natural clinoptilolite	167.64	37	Copper ferrocyanide (cufc)	17.16	8
Prussian blue caged in spongiiform 167	167	46	Commercial pb particles	17.1	67
Prussian blue graphene oxide	164.5	13	Cofc-silica-py	17	68
Kznhcf-pan	161	47	Copper ferrocyanide functionalized mesoporous silica (seawater, ph 7.7)	16.58	69
Mucilaginous seeds of ocimumbasilicum	160	48	Naoh treated moss	16.2	70
Prussian blue alone 158	158	46	Nickel hexacyanoferrate	15.15	71
Pan-knicf	157.7	49	Prussian-blue-modified magnetite (pb-fe ₃ o ₄)	12.75	72
Cs-g-bentonite	153.65	50	Clinoptilolite	12.5	67
Prussian blue caged in alginate/calcium beads	142.85	51	Oxidized multiwall carbon nanotubes	10.56	73
Reinforced with carbon nanotubes	131.57	51	Iron(iii) hexacyanoferrate (ii) (insoluble prussian blue)	10.56	74
Prussian blue caged in alginate/calcium beads	120.9	52	Crushed granite	10.1	73
Clinoptilolite	118.00	53	Carbonized rice hull	7.3	75
Titanium phosphates	114.9	54	Brewery's waste biomass	6.68	76
Ferrite	97.63	55	Copper hexacyanoferrate-polyacrylonitrile composite (chcf-pan)	6	77
Mesoporous hybrid adsorbent (mha)	96	17	Sericite	5.5	78
Pb-coated mnpnano-sorbents	91.8	56	Moos	5.43	78
Ammonium molybdophosphate-calcium alginate composite adsorbent	87.72	57	Copper ferrocyanide	5.34	78
Copper ferrocyanide is fixed organic silica	86.28	55	Iron pillared layered montmorillonite (fe-pilm)	5.28	62
Hybrid adsorbent	81.3	58	Their mixture (fe-pilm;a-feooh)	4.94	79
Ammonium molybdophosphate-Polyacrylonitrile	78.17	45	Cofc/glass-py	4.31	80
Vermiculite modification by	77.70	59	Nickel (ii) hexacyanoferrate (iii) residue-walnut shell (niiihcfiii-ws)	4.04	81
Ethylamine	72.6	47	Ainoussera	4	82
Conjugate adsorbent	68.49	54	Zirconium tungstate	3.96	74
Potassium metal hexacyanoferrate -pan	56.92	45	Kaolin	3.93	83
Magnetite	56.00	60	Sawdust (beech)	3.05	84
Ethylamine	55.32	61	Pre-treated arca shell biomass	1.32	85
Prussian blue (pb) impregnated in alginate gel (Ag)	53.2	8	Goethite (a-feooh)	0.1	79

Li *et al.* used vermiculite for adsorption of sodium from the water. Cs removal efficiency of 98% was achieved in 5 hours (1.5 µg/g).⁸⁶ The results of our study also showed that the presence of sodium, calcium, and ammonium

ions reduced the uptake of Cs radionuclides. The first study of Kim *et al.* suggested that Yesan clay and zeolite removed 1.865 and 9.055 µg/g of Cs from the water, respectively.⁸⁷ In the second study of Kim *et al.*, sericite was used to

remove Cs from water, and the maximum value of adsorption was 6.68 $\mu\text{g/g}$.⁷⁶ Ding *et al.* used walnut shell integrated with nickel hexacyanoferrate to absorb Cs from the aqueous solution. The amount of Cs and Nickel hexacyanoferrate integrated Cs (NiHCF-WS) adsorption was 0.1 mg/g and 0.5 mg/g, respectively. HCF-WS could absorb Cs effectively through a spontaneous endothermic process.⁷⁹

Ararem *et al.* showed that montmorillonite-iron oxide composite had a maximum Cs adsorption of 52.6 mg/g in aqueous solution.⁶² Long *et al.* compared Cs adsorption by ethylamine-modified montmorillonite (Ethyl-MT) and calcium-saturated montmorillonite (Ca-Mt). The results showed that Ethyl-MT had a greater Cs removal efficiency because of a higher absorption capacity and also greater surface.⁸⁸ Bayulken *et al.* investigated Cs adsorption by Turkish clay (bentonite, zeolite, sepiolite, and kaolinite). The results showed that bentonite and zeolite had greater adsorption capacity than sepiolite and kaolinite.⁸⁹ Du *et al.* used the spherical PAN-based potassium nickel hexacyanoferrate for Cs adsorption. The results showed that Cs had a greater binding affinity than sodium, magnesium, calcium, potassium, and ammonium ions.⁴⁹ Chitrakar *et al.* showed that manganese oxide layered in pH = 2–4 and pH = 10 removed 172 mg/g and 132 mg/g of Cs from the water, respectively.⁹⁰ Dahiya *et al.* studied the adsorption of lead, copper, cobalt, and Cs from water and concluded that the maximum level of absorption for Cs was 3.93 ± 0.11 mg/g.⁸³ During the first study by Krishna *et al.*, *Funariahygrometrica* biosorbents were used to remove ¹³⁷Cs and ⁹⁰Sr. The study showed that Cs was removed from the aqueous solution in the capacity of 38 mg/g. The –COO group is also responsible for the radionuclide absorption. In the second study by Krishna *et al.*, *Funariahygrometrica* was mixed with polysilicates and used to remove ¹³⁷Cs and ⁹⁰Sr.⁶⁸ At pH 5–10 and 30-minute contact time, the absorption level was 15 mg/g. A number of studies showed undesirable adsorption. For example, during a study on Cs removal by coconut shell-activated carbon, Caccin *et al.*

showed that activated carbon has a low absorption capacity.⁶¹ Suzuki *et al.* used vermiculite for Cs absorption, which did not have adequate absorption in artificial seawater.⁹¹ Long *et al.* increased the vermiculite's specific surface area and porosity for Cs removal by ethylamine. The specific surface area increased from 4.35 to 15.59 m²/g. Also, the average hole diameter decreased from 5.34 to 6.8 nm. The rate of increase of Cs aqueous solution absorption rose from 56.92 to 78.17 mg/g after the vermiculite was modified. The structure of the holes and the specific surface had an important role in Cs adsorption. The presence of cations ($\text{Ca}^{2+} > \text{K}^{+} > \text{Na}^{+}$) and organic molecules with low molecular weight prevented the adsorption of Cs.⁴⁵ Based on the above studies, use of absorbents, except vermiculite, did not have a good efficiency in Cs removal. Alkaline compounds could also compete with Cs in water adsorption. Among the Cs special absorbents, competition between Cs and alkaline compounds was less, and Cs was absorbed on a priority. Therefore, Cs special absorbents such as old dye and PB were used.

Removal of Cesium by Prussian blue

PB was demonstrated as an efficient Cs scavenger because $\text{Fe}_7(\text{CN})_{18}$ had a crystal cage size similar to the hydration radius of a Cs ion. Therefore, a separate section is devoted to PB. PB is a lattice structure with eight molecules of water. It was used for adsorption of Cs from the victims' bodies after the Chernobyl incident in 1987. On account of the high affinity of Cs to PB, it was used for water decontamination. The affinity of the cations to the PB absorbent was dependent on the hydration radius. The smaller the cation's hydration radius was, the more affinity to PB it had. Cesium's hydration radius (3.25 Å) was less than that of potassium (3.3 Å), sodium (3.6 Å), calcium (4.1 Å), and magnesium (4.25 Å). During multiple studies, the PB nanoparticles were altered using different methods. For example, Hara *et al.* made a thin layer of film by alkyl ligand-covered PB nanoparticles in organic solutions.⁹² Glass and silica-based matrix nanocomposites

along with PB nanoparticles have a 10 times greater rate of adsorption and three times higher capacity for adsorption than large PB particles. Torad *et al.* suggested that PB nanoparticles with a level of $330 \text{ m}^2/\text{g}$ had more Cs ion-removal efficiency than commercial PB.⁴¹ Omura *et al.* covered the nanoparticles of PB with ferricyanide anions. The small size of the PB nanoparticles caused an increase in the surface-to-volume ratio followed by an increase in Cs uptake.⁹³ Sasaki *et al.* used PB altered by magnetite (PB- Fe_3O_4) to remove Cs from the water. The maximum level of Cs adsorption was 16.2 mg/g .⁹⁴ Ishizaki *et al.* created PB nanoparticles ($\text{Fe}_4(\text{Fe}(\text{CN})_6)_3$) with several hydrophilic sites. Cs was adsorbed in great amounts by the proton removal reaction from this site.¹⁸ The stoichiometric ratio of Fe:Cs in the PB particles and PB nanoparticles was, respectively, 8:1 and 1:1; therefore, the use of PB nanoparticles increased the Cs removal efficiency by a great number.¹¹ Thammawong *et al.* used magnetic nanoparticles (MNP) connected to PB to remove Cs.¹⁷

Magnetic particles are used to absorb Cs from a body. This compound has a high absorption capacity (96 mg Cs/g sorbent) and high distribution coefficient ($3.2 \times 10^4 \text{ ml/g}$) at 0.5 ppm Cs .¹⁷ Despite the high efficiency of MNP in the removal of Cs, retrieving it from tap water, unlike magnetic particles, is not easy. Namiki *et al.* have used Prussian blueberry (PB-coated magnetic nanoparticles) to remove Cs from seawater.¹ The results show that Prussian blueberry (5 mg) decreases the Cs concentration from 150 ppm to 5 ppm . Also, on a large-scale, use of Prussian blueberry for 5 minutes reduces Cs concentration to 35%–35.6%.¹ Jang *et al.* have investigated the removal of Cs from aqueous solutions by PB graphene oxide hydrogel encapsulated within a PVA-alginate, in a fixed-bed column. PB nanoparticles were attached to the graphene oxide layers. The effect of pH on Cs removal (1 mmol concentration, flow of 0.83 ml/min , and 5 cm height) increased from 1 to 7, and the absorber reached a saturation point in less time. As PB dissolves in hydrogel in acidic environments, Cs absorption increases.¹³ However, in an alkaline

environment, Cs adsorption is reduced due to the formation of strong links between ferric ions and hydroxyl ions, which make band Fe-CN-Fe in PB (pH 7–9).⁹⁵ The initial increase of Cs concentration from 1 to 5 mmol and an increase in bed height from 5 to 20 cm increased the adsorption from 141.6 to 163.1 mg/g . Also, with the increase of the sorbent's particle size from 2 to 5 mm , the absorption capacity decreased from 161.6 to 130.96 mg/g . In a neutral pH flow rate, the bed height increased by reducing the initial concentration of Cs as well as the absorption efficiency.¹³ The presence of PB components in tap water, such as binding polyvinyl alcohol and alginate, can endanger human health.⁹⁶ Chen *et al.* investigated the removal of the remaining Cs components and PB from the aqueous solution by PB and ion exchange. Two scenarios were performed. In the first one, the effect of ion exchange granules on PB was studied, and in the second, the ion exchange column, along with PB, in a large-scale water treatment plant were studied. The results showed that both methods could completely remove Cs (98% efficiency in a contact time of 50 seconds, and in 150-second contact time, there was lower than $0.01 \text{ }\mu\text{g/l}$ limit of detection) and the remaining components of PB, such as ferricyanide ions and total cyanide.⁹⁷ The high solubility of Cs and its low surface charge had decreased its removal by the adsorbents via hydrophobic interaction or electrostatic interaction mechanisms.⁹⁸

Conclusion

This study aimed to review the adsorption process for removal of Cs from water and aqueous solutions. The results showed that conventional water treatment methods could not efficiently remove Cs. The highest MAC of Cs was related to natural chabazite (273.24 mg Cs/g adsorbent), hollow PB nanoparticles (262 mg Cs/g adsorbent), PB-implemented non-woven fabric (260 mg Cs/g adsorbent), natural mordenite (254.7 mg Cs/g adsorbent), and PB granules (241 mg Cs/g adsorbent). The minimum MAC of Cs was related to crushed granite (1.32 mg Cs/g adsorbent) and walnut shell (0.1 mg Cs/g adsorbent). Several studies showed a high affinity of PB for Cs adsorption

from aqueous solutions. On account of its high absorption capacity, natural chabazite should be paid more attention in the future research. It must be noted that the presence of absorbent residues in water is the most important health problem and must be taken into consideration in future studies.

Conflict of interest

The authors have no conflict of interest to declare.

Acknowledgment

The authors would like to thank the student research committee, ShahidBeheshti University of Medical Sciences for the financial grants for this study (Code: 1395/74326).

Author contribution

Y.FA conceived the study; Y.FA, M.SA, Z.BA, and N.AM designed the study protocol; H. KE, B. MO, and R. PO searched the literature; H. KE extracted the data; M.FE and G.OC analyzed and interpreted the data; Y.FA and M.AB wrote the manuscript; N. Am and B.MO critically revised the manuscript.

References

- Namiki Y, Namiki T, Ishii Y, Koido S, Nagase Y, Tsubota A, et al. Inorganic-organic magnetic nanocomposites for use in preventive medicine: A rapid and reliable elimination system for cesium. *Pharm Res* 2012;29(5):1404-18.
- Thammawong C, Opaprakasit P, Tangboriboonrat P, Sreearunothai P. Prussian blue-coated magnetic nanoparticles for removal of cesium from contaminated environment. *J Nanopart Res* 2013;15(6):1-10.
- Estournel C, Bosc E, Bocquet M, Ulses C, Marsaleix P, Winiarek V, et al. Assessment of the amount of cesium-137 released into the Pacific Ocean after the Fukushima accident and analysis of its dispersion in Japanese coastal waters. *Journal of Geophysical Research: Oceans* 2012;117(C11).
- Aono T, Fukuda M, Yoshida S, Ito Y, Ishimaru T, Kanda J, et al. Concentration fluctuation of radioactive cesium in plankton in the coastal zone of Fukushima Prefecture. *Proceedings of the spring workshop on Oceanographic Society of Japan* 2014; 4:21-6.
- Giannakopoulou F, Haidouti C, Chronopoulou A, Gasparatos D. Sorption behavior of cesium on various soils under different pH levels. *J Hazard Mater* 2007;149(3):553-6.
- Racine R, Grandcolas L, Grison S, Gourmelon P, Gueguen Y, Veyssiere G, et al. Molecular modifications of cholesterol metabolism in the liver and the brain after chronic contamination with cesium 137. *Food Chem Toxicol* 2009;47(7):1642-7.
- Rogers H, Bowers J, Gates-Anderson D. An isotope dilution-precipitation process for removing radioactive cesium from wastewater. *J Hazard Mater* 2012;243:124-9.
- Delchet C, Tokarev A, Dumail X, Toquer G, Barré Y, Guari Y, et al. Extraction of radioactive cesium using innovative functionalized porous materials. *Rsc Advances* 2012;2(13):5707-16.
- Parab H, Sudersanan M. Engineering a lignocellulosic biosorbent-Coir pith for removal of cesium from aqueous solutions: Equilibrium and kinetic studies. *Water Res* 2010;44(3):854-60.
- Topcuoğlu S. Bioaccumulation of cesium-137 by biota in different aquatic environments. *Chemosphere* 2001;44(4):691-5.
- Chen G-R, Chang Y-R, Liu X, Kawamoto T, Tanaka H, Kitajima A, et al. Prussian blue (PB) granules for cesium (Cs) removal from drinking water. *Sep Purif Technol* 2015;143:146-51.
- Hossain M, Ngo H, Guo W, Setiadi T. Adsorption and desorption of copper (II) ions onto garden grass. *Bioresour Technol* 2012;121:31-38.
- Jang J, Lee DS. Enhanced adsorption of cesium on PVA-alginate encapsulated Prussian blue-graphene oxide hydrogel beads in a fixed-bed column system. *Bioresour Technol* 2016;218:294-300.
- Vijayaraghavan K, Yun Y-S. Bacterial biosorbents and biosorption. *Biotechnol Adv* 2008;26(3):266-91.
- Yakout S, Elsherif E. Batch kinetics, isotherm and thermodynamic studies of adsorption of strontium from aqueous solutions onto low cost rice-straw based carbons. *Carbon-Sci Technol* 2010;1:144-53.
- Okamura Y, Fujiwara K, Ishihara R, Sugo T, Kojima T, Umeno D, et al. Cesium removal in freshwater using potassium cobalt hexacyanoferrate-impregnated fibers. *Radiat Phys Chem* 2014;94:119-22.
- Thammawong C, Opaprakasit P, Tangboriboonrat P, Sreearunothai P. Prussian

- blue-coated magnetic nanoparticles for removal of cesium from contaminated environment. *Journal of nanoparticle research* 2013;15(6):1689-93.
18. Ishizaki M, Akiba S, Ohtani A, Hoshi Y, Ono K, Matsuba M, et al. Proton-exchange mechanism of specific Cs⁺ adsorption via lattice defect sites of Prussian blue filled with coordination and crystallization water molecules. *Dalton Transactions* 2013;42(45):16049-55.
 19. Majidnia Z, Idris A. Evaluation of cesium removal from radioactive waste water using maghemite PVA–alginate beads. *Chem Eng J* 2015;262:372-82.
 20. Liberati A, Altman DG, Tetzlaff J, Mulrow C, Gøtzsche PC, Ioannidis JP, et al. The PRISMA statement for reporting systematic reviews and meta-analyses of studies that evaluate health care interventions: explanation and elaboration. *PLoS Med* 2009;6(7):21-9.
 21. Fakhri Y, Bay A, Moradi B, Zandsalimi Y, Amirhajloo LR, Langarizadeh G, et al. A review on difference effective dose of radon 222 and thoron of indoor air between black cement warehouses and stone masonry workshops. *International Journal of Pharmacy and Technology* 2016;8(1):3671-81.
 22. Fakhri Y, Madani A, Moradi K, Mirzaei M. Determination concentration of Radon 222 in Tap drinking water, Bandar Abbas City, Iran. *Journal of Environmental Science, Toxicology and Food Technology* 2015;9(16):54-58.
 23. Fakhri Y, Mahvi AH, Langarizadeh G, Zandsalimi Y, Amirhajloo LR, Kargosha M, et al. Effective Dose of Radon 222 Bottled Water in Different Age Groups Humans: Bandar Abbas City, Iran. *Global journal of health science* 2016;8(2):64-9.
 24. Saeid Motesaddi YF, Alizadeh A, Mohseni SM, Jafarzadeh S. Effective dose of Radon 222 and Thoron 220 in the indoor air of Genow hot springs of Bandar Abbas. *Advances in Environmental Biology* 2014;8:453-9.
 25. U.S. Epa (United States Environmental Protection Agency), 40 CFR Parts 141 and 142. National Primary Drinking Water Regulations; Radionuclide 2000;65:21576–628.
 26. NRA (Nuclear Regulation Authority, Japan), Readings of Radioactivity in Drinking Water by Prefecture. July–September, 2013.
 27. Kioupi V, Florou H, Kapsanaki-Gotsi E, Gonou-Zagou Z. Bioaccumulation of the artificial Cs-137 and the natural radionuclides Th-234, Ra-226, and K-40 in the fruit bodies of Basidiomycetes in Greece. *Environmental Science and Pollution Research* 2016;23(1):613-24.
 28. Rowan D. Bioaccumulation factors and the steady state assumption for cesium isotopes in aquatic foodwebs near nuclear facilities. *J Environ Radioact* 2013;121:2-11.
 29. Water Treatment: American Water Works Association; 2011.
 30. Morton RJ, Straub CP. Removal of radionuclides from water by water treatment processes. *Journal American Water Works Association* 1956;48(5):545-58.
 31. Gäfvert T, Ellmark C, Holm E. Removal of radionuclides at a waterworks. *J Environ Radioact* 2002;63(2):105-15.
 32. Goossens R, Delville A, Genot J, Halleux R, Masschelein W. Removal of the typical isotopes of the Chernobyl fall-out by conventional water treatment. *Water Res* 1989;23(6):693-7.
 33. Baeza A, Salas A, Legarda F. Determining factors in the elimination of uranium and radium from groundwaters during a standard potabilization process. *Sci Total Environ* 2008;406(1–2):24-34.
 34. Kosaka K, Asami M, Kobashigawa N, Ohkubo K, Terada H, Kishida N, et al. Removal of radioactive iodine and cesium in water purification processes after an explosion at a nuclear power plant due to the Great East Japan Earthquake. *Water Res* 2012;46(14):4397-404.
 35. Brown J, Hammond D, Wilkins B. Handbook for assessing the impact of a radiological incident on levels of radioactivity in drinking water and risks to operatives at water treatment works: Health Protection Agency 2008;21:51-9.
 36. Zhang D, Lee D-J, Pan X. Desorption of Hg (II) and Sb (V) on extracellular polymeric substances: Effects of pH, EDTA, Ca (II) and temperature shocks. *Bioresour Technol* 2013;128:711-5.
 37. Borai E, Harjula R, Paajanen A. Efficient removal of cesium from low-level radioactive liquid waste using natural and impregnated zeolite minerals. *J Hazard Mater* 2009;172(1):416-22.
 38. Marcus Y. Thermodynamics of solvation of ions. Part 5. Gibbs free energy of hydration at 298.15 K. *J Chem Soc, Faraday Trans* 1991;87(18):2995-9.
 39. Liang T-J, Hsu C-N. Sorption of cesium and strontium on natural mordenite. *Radiochimica*

- acta 1993;61(2):105-8.
40. Dyer A, James N, Terrill N. Uptake of cesium and strontium radioisotopes onto pillared clays. *J Radioanal Nucl Chem* 1999;240(2):589-92.
 41. Torad NL, Hu M, Imura M, Naito M, Yamauchi Y. Large Cs adsorption capability of nanostructured Prussian Blue particles with high accessible surface areas. *J Mater Chem* 2012;22(35):18261-7.
 42. Chen G-R, Chang Y-R, Liu X, Kawamoto T, Tanaka H, Parajuli D, et al. Prussian blue non-woven filter for cesium removal from drinking water. *Sep Purif Technol* 2015;153:37-42.
 43. Faghihian H, Moayed M, Firooz A, Irvani M. Synthesis of a novel magnetic zeolite nanocomposite for removal of Cs⁺ and Sr²⁺ from aqueous solution: Kinetic, equilibrium, and thermodynamic studies. *J Colloid Interface Sci* 2013;393:445-51.
 44. Wang T-H, Li M-H, Wei Y-Y, Teng S-P. Desorption of cesium from granite under various aqueous conditions. *Appl Radiat Isot* 2010;68(12):2140-46.
 45. Long H, Wu P, Yang L, Huang Z, Zhu N, Hu Z. Efficient removal of cesium from aqueous solution with vermiculite of enhanced adsorption property through surface modification by ethylamine. *J Colloid Interface Sci* 2014;428:295-301.
 46. Hu B, Fugetsu B, Yu H, Abe Y. Prussian blue caged in spongiform adsorbents using diatomite and carbon nanotubes for elimination of cesium. *J Hazard Mater* 2012;217:85-91.
 47. Someda H, Elzahhar A, Shehata M, El-Naggar H. Supporting of some ferrocyanides on polyacrylonitrile (PAN) binding polymer and their application for cesium treatment. *Sep Purif Technol* 2002;29(1):53-61.
 48. Chakraborty D, Maji S, Bandyopadhyay A, Basu S. Biosorption of cesium-137 and strontium-90 by mucilaginous seeds of *Ocimum basilicum*. *Bioresour Technol* 2007;98(15):2949-52.
 49. Du Z, Jia M, Wang X. Cesium removal from solution using PAN-based potassium nickel hexacyanoferrate (II) composite spheres. *J Radioanal Nucl Chem* 2013;298(1):167-77.
 50. Yang S, Han C, Wang X, Nagatsu M. Characteristics of cesium ion sorption from aqueous solution on bentonite-and carbon nanotube-based composites. *J Hazard Mater* 2014;274:46-52.
 51. Vipin AK, Hu B, Fugetsu B. Prussian blue caged in alginate/calcium beads as adsorbents for removal of cesium ions from contaminated water. *J Hazard Mater* 2013;258:93-101.
 52. De Haro-Del Rio D, Al-Joubori S, Kontogiannis O, Papadatos-Gigantes D, Ajayi O, Li C, et al. The removal of caesium ions using supported clinoptilolite. *J Hazard Mater* 2015;289:1-8.
 53. Kapnisti M, Hatzidimitriou A, Noli F, Pavlidou E. Investigation of cesium uptake from aqueous solutions using new titanium phosphates ion-exchangers. *J Radioanal Nucl Chem* 2014;302(1):679-88.
 54. Sheha R, Metwally E. Equilibrium isotherm modeling of cesium adsorption onto magnetic materials. *J Hazard Mater* 2007;143(1):354-61.
 55. Awual MR, Miyazaki Y, Taguchi T, Shiwaku H, Yaita T. Encapsulation of cesium from contaminated water with highly selective facial organic-inorganic mesoporous hybrid adsorbent. *Chem Eng J* 2016;291:128-37.
 56. Ye X, Wu Z, Li W, Liu H, Li Q, Qing B, et al. Rubidium and cesium ion adsorption by an ammonium molybdophosphate-calcium alginate composite adsorbent. *Colloids Surf Physicochem Eng Aspects* 2009; 342(1):76-83.
 57. Park Y, Kim C, Choi S-J. Selective removal of Cs using copper ferrocyanide incorporated on organically functionalized silica supports. *J Radioanal Nucl Chem* 2015;303(1):199-208.
 58. Park Y, Lee Y-C, Shin WS, Choi S-J. Removal of cobalt, strontium and cesium from radioactive laundry wastewater by ammonium molybdophosphate-polyacrylonitrile (AMP-PAN). *Chem Eng J* 2010;162(2):685-95.
 59. Awual MR, Suzuki S, Taguchi T, Shiwaku H, Okamoto Y, Yaita T. Radioactive cesium removal from nuclear wastewater by novel inorganic and conjugate adsorbents. *Chem Eng J* 2014;242:127-35.
 60. Mihara Y, Sikder MT, Yamagishi H, Sasaki T, Kurasaki M, Itoh S, et al. Adsorption kinetic model of alginate gel beads synthesized micro particle-prussian blue to remove cesium ions from water. *Journal of Water Process Engineering* 2016;10:9-19.
 61. Caccin M, Giacobbo F, Da Ros M, Besozzi L, Mariani M. Adsorption of uranium, cesium and strontium onto coconut shell activated carbon. *J Radioanal Nucl Chem* 2013;297(1):9-18.
 62. Ararem A, Bouras O, Bouzidi A. Batch and continuous fixed-bed column adsorption of Cs⁺ and Sr²⁺ onto montmorillonite-iron oxide composite: Comparative and competitive study. *J Radioanal Nucl Chem* 2013;298(1):537-44.

63. Wang T-H, Li M-H, Yeh W-C, Wei Y-Y, Teng S-P. Removal of cesium ions from aqueous solution by adsorption onto local Taiwan laterite. *J Hazard Mater* 2008;160(2):638-42.
64. El-Naggar M, El-Kamash A, El-Dessouky M, Ghonaim A. Two-step method for preparation of NaA-X zeolite blend from fly ash for removal of cesium ions. *J Hazard Mater* 2008;154(1):963-72.
65. Deng H, Li Y, Huang Y, Ma X, Wu L, Cheng T. An efficient composite ion exchanger of silica matrix impregnated with ammonium molybdophosphate for cesium uptake from aqueous solution. *Chem Eng J* 2016;286:25-35.
66. Han F, Zhang G-H, Gu P. Adsorption kinetics and equilibrium modeling of cesium on copper ferrocyanide. *J Radioanal Nucl Chem* 2013;295(1):369-77.
67. Sangvanich T, Sukwarotwat V, Wiacek RJ, Grudzien RM, Fryxell GE, Addleman RS, et al. Selective capture of cesium and thallium from natural waters and simulated wastes with copper ferrocyanide functionalized mesoporous silica. *J Hazard Mater* 2010;182(1):225-31.
68. Krishna MB, Rao S, Arunachalam J, Murali M, Kumar S, Manchanda V. Removal of ^{137}Cs and ^{90}Sr from actual low level radioactive waste solutions using moss as a phyto-sorbent. *Sep Purif Technol* 2004;38(2):149-61.
69. Jeon C, Cha J-H. Removal of cesium ions from waste solution using sericite incorporated into nickel hexacyanoferrate. *Korean J Chem Eng* 2015;32(11):2273-9.
70. Sasaki T, Tanaka S. Magnetic separation of cesium ion using Prussian blue modified magnetite. *Chem Lett* 2012;41(1):32-4.
71. Osmanlioglu AE. Removal of radioactive contaminants by polymeric microspheres. *Environ Technol* 2016;37(22):2830-4.
72. Yavari R, Huang Y, Ahmadi S. Adsorption of cesium (I) from aqueous solution using oxidized multiwall carbon nanotubes. *J Radioanal Nucl Chem* 2011;287(2):393-401.
73. Tsai S-C, Wang T-H, Li M-H, Wei Y-Y, Teng S-P. Cesium adsorption and distribution onto crushed granite under different physicochemical conditions. *J Hazard Mater* 2009;161(2):854-61.
74. Miura A, Kubota T, Hamada K, Hitomi T. Adsorption efficiency of natural materials for low-concentration cesium in solution. *Water Sci Technol* 2016;73(10):2453-60.
75. Nilchi A, Saberi R, Moradi M, Azizpour H, Zarghami R. Adsorption of cesium on copper hexacyanoferrate-PAN composite ion exchanger from aqueous solution. *Chem Eng J* 2011;172(1):572-80.
76. Kim J-O, Lee S-M, Jeon C. Adsorption characteristics of sericite for cesium ions from an aqueous solution. *Chem Eng Res Des* 2014;92(2):368-74.
77. Krishna MB, Arunachalam J, Murali M, Kumar S, Manchanda V. Performance of immobilized moss in the removal of ^{137}Cs and ^{90}Sr from actual low-level radioactive waste solutions. *J Radioanal Nucl Chem* 2004;261(3):551-7.
78. Avramenko V, Bratskaya S, Zheleznov V, Sheveleva I, Voitenko O, Sergienko V. Colloid stable sorbents for cesium removal: preparation and application of latex particles functionalized with transition metals ferrocyanides. *J Hazard Mater* 2011;186(2):1343-50.
79. Ding D, Zhao Y, Yang S, Shi W, Zhang Z, Lei Z, et al. Adsorption of cesium from aqueous solution using agricultural residue-Walnut shell: Equilibrium, kinetic and thermodynamic modeling studies. *Water Res* 2013;47(7):2563-71.
80. Bouzidi A, Souahi F, Hanini S. Sorption behavior of cesium on Ain Oussera soil under different physicochemical conditions. *J Hazard Mater* 2010;184(1):640-6.
81. Hamed MM, Attallah M, Shehata F. Synthesis, characterization and sorption Behavior of some radionuclides on zirconium tungstate ion exchanger. *Arab J Nucl Sci Appl* 2012;45:37-50.
82. Al-Shahrani S, Roberts E. Electrokinetic removal of caesium from kaolin. *J Hazard Mater* 2005;122(1):91-101.
83. Dahiya S, Tripathi R, Hegde A. Biosorption of heavy metals and radionuclide from aqueous solutions by pre-treated arca shell biomass. *J Hazard Mater* 2008;150(2):376-86.
84. Ararem A, Bouras O, Arbaoui F. Adsorption of caesium from aqueous solution on binary mixture of iron pillared layered montmorillonite and goethite. *Chem Eng J* 2011;172(1):230-6.
85. Chen C, Wang J. Removal of Pb^{2+} , Ag^{+} , Cs^{+} and Sr^{2+} from aqueous solution by brewery's waste biomass. *J Hazard Mater* 2008;151(1):65-70.
86. Li B, Liao J, Zhang D, Zhao J, Yang Y-Y, Cheng Q, et al. Adsorption of cesium by vermiculite. *Journal-Sichuan University Natural Science Edition* 2008;45(1):115.
87. Kim CK, Kong JY, Chun BS, Park J-W. Radioactive removal by adsorption on Yesan clay

- and zeolite. *Environmental earth sciences* 2013;68(8):2393-8.
88. Long H, Wu P, Zhu N. Evaluation of Cs⁺ removal from aqueous solution by adsorption on ethylamine-modified montmorillonite. *Chem Eng J* 2013;225:237-44.
89. Bayülken S, Başçetin E, Güçlü K, Apak R. Investigation and modeling of cesium (I) adsorption by Turkish clays: bentonite, zeolite, sepiolite, and kaolinite. *Environ Prog Sustain Energy* 2011; 30(1): 70-80.
90. Chitrakar R, Makita Y, Sonoda A. Cesium Ion Uptake by Synthetic K-birnessite K_{0.30}(Mn⁴⁺ 0.90 Mn³⁺ 0.03 □ 0.07) O₂· 0.50 H₂O. *Chem Lett* 2013;42(9):1032-4.
91. Suzuki N, Ozawa S, Ochi K, Chikuma T, Watanabe Y. Approaches for cesium uptake by vermiculite. *J Chem Technol Biotechnol* 2013; 8(9):1603-5.
92. Hara S, Tanaka H, Kawamoto T, Tokumoto M, Yamada M, Gotoh A, et al. Electrochromic thin film of Prussian blue nanoparticles fabricated using wet process. *Jpn J Appl Phys* 2007;46(10L):L945.
93. Omura A, Shiozaki H, Hara S, Kawamoto T, Gotoh A, Kurihara M, et al. Electrochromic thin film of water-dispersible Prussian-blue nanoparticles. *IEICE transactions on electronics* 2008; 91(12): 1887-8.
94. Sasaki T, Tanaka S. Magnetic separation of cesium ion using Prussian blue modified magnetite. *Chem Lett* 2011;41(1):32-4.
95. Ricci F, Amine A, Palleschi G, Moscone D. Prussian Blue based screen printed biosensors with improved characteristics of long-term lifetime and pH stability. *Biosensors and Bioelectronics* 2003;18(2):165-74.
96. Lai Y-C, Chang Y-R, Chen M-L, Lo Y-K, Lai J-Y, Lee D-J. Poly (vinyl alcohol) and alginate cross-linked matrix with immobilized Prussian blue and ion exchange resin for cesium removal from waters. *Bioresource technology* 2016;214:192-8.
97. Chen G-R, Chang Y-R, Liu X, Kawamoto T, Tanaka H, Parajuli D, et al. Cesium removal from drinking water using Prussian blue adsorption followed by anion exchange process. *Separation and Purification Technology* 2017;172:147-51.
98. Liu X, Chen G-R, Lee D-J, Kawamoto T, Tanaka H, Chen M-L, et al. Adsorption removal of cesium from drinking waters: A mini review on use of biosorbents and other adsorbents. *Bioresource technology* 2014;160:142-9.